

SAMSUNG

3 CD CHANGER MINI MINI COMPONENT

MAX-B550



MAX-B570

MAX-B555

MAX-ZB550


***SERVICE* Manual**

MIMI MIMI COMPONENT SYSTEM

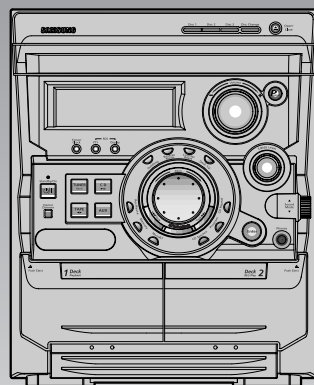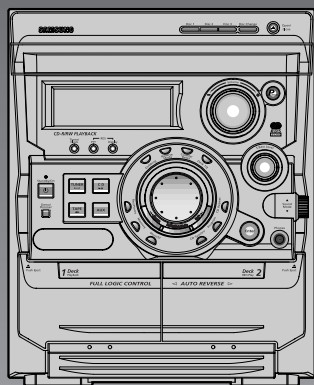


CONTENTS

- 1. Alignment and Adjustments**
- 2. Exploded Views and Parts List**
- 3. Electrical Parts List**
- 4. Block Diagrams**
- 5. PCB Diagrams**
- 6. Wiring Diagram**
- 7. Schematic Diagrams**

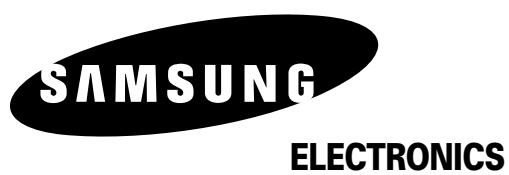

1. Alignment and Adjustments

1-1. Tuner

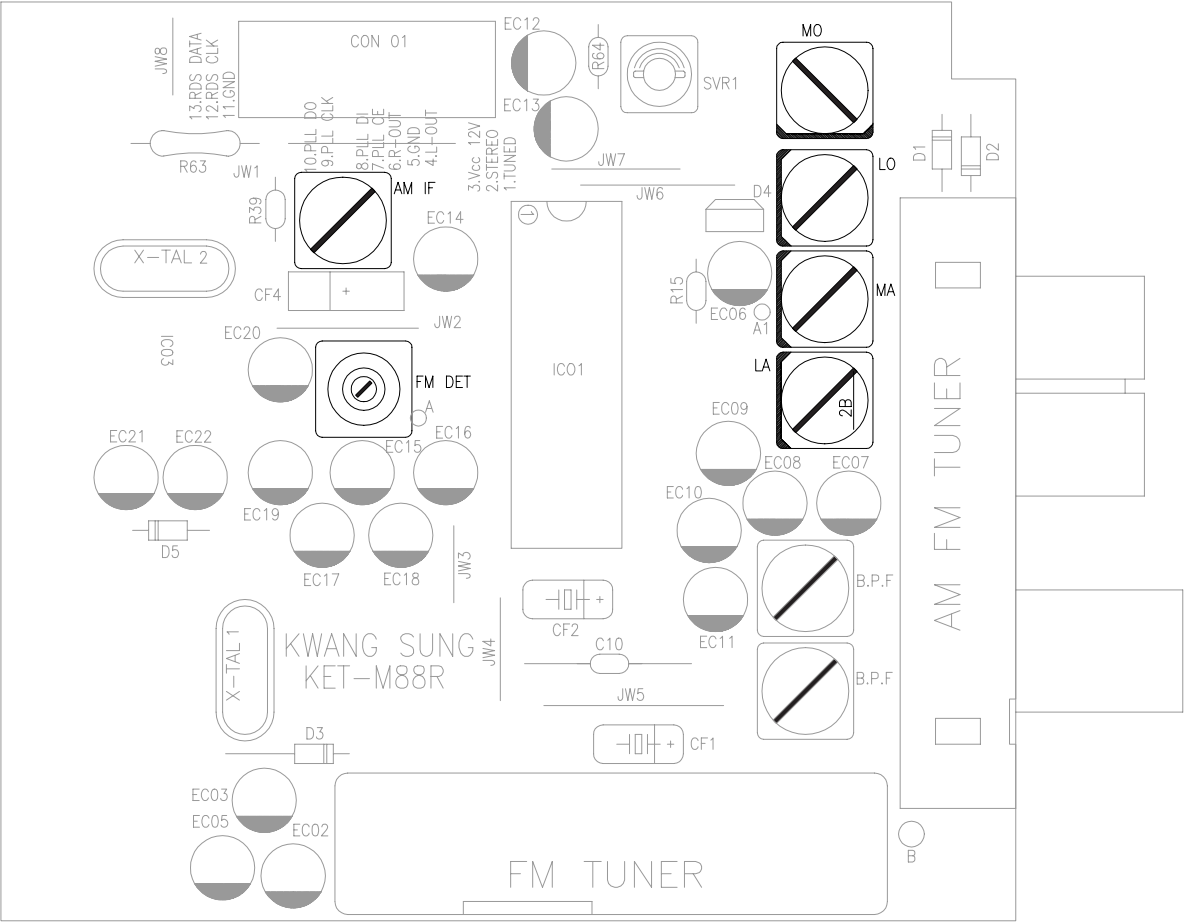

* Adjustment Location of Tuner PCB

ITEAM	AM(MW) OSC	AM(MW) RF	LW OSC	AM(MW) RF	SW1 OSC	SW1 RF	SW2 OSC	SW2 RF
Received FREQ.	522~1611 KHz	594 KHz	146~290 KHz	150 KHz	2.3~7.3 MHz	3.5MHz	9.5~26.1MHz	10MHz
Adjustment point	MO	MA	LO	LA	LO	MA	LO	MA
Output	1~7.0±0.5V	Maximum Output (Fig1-4)	2~7.0±0.5V	Maximum Output (Fig1-4)	1~8V±1V	Maximum Output (Fig1-4)	1~8V±1V	Maximum Output (Fig1-4)

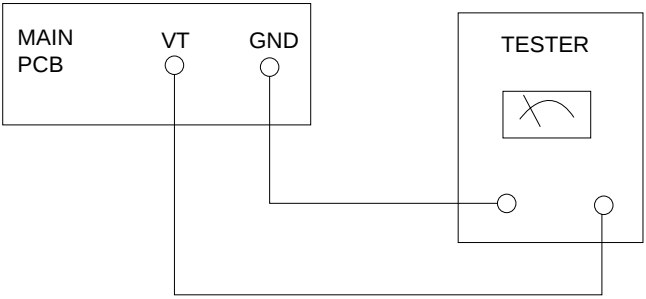


Fig 1-4 OSC Voltage

FM THD Adjustment	
SSG FREQ.	98 MHz
Adjustment point (FM DET)	FM DETECTOR COIL
Output	60 dB
Minumum Distortion (0.4% below) (Figure 1-1)	

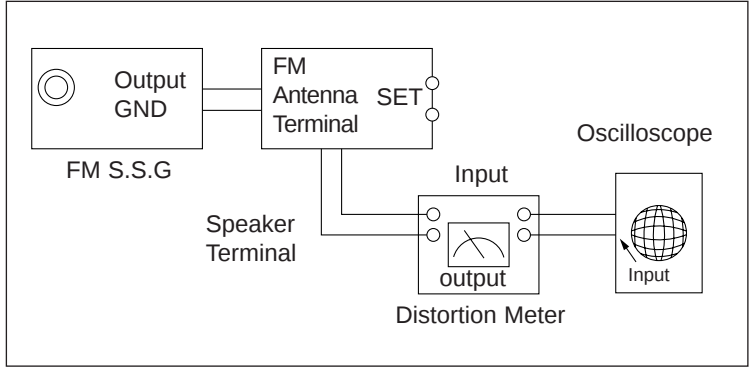


Figure1-1 IF CENTER and THD Adjustment

FM Search Level Adjustment	
SSG FREQ.	98 MHz
Adjustment point (SVR1)	BEACON SENSITIVITY SEMI-VR(10KΩ)
Output	28 dB(±2dB)
Adjust SVR1 so that "TUNED" of FLT is lighted (Figure 1-2)	

*Adjust FM S.S.G level to 28dB

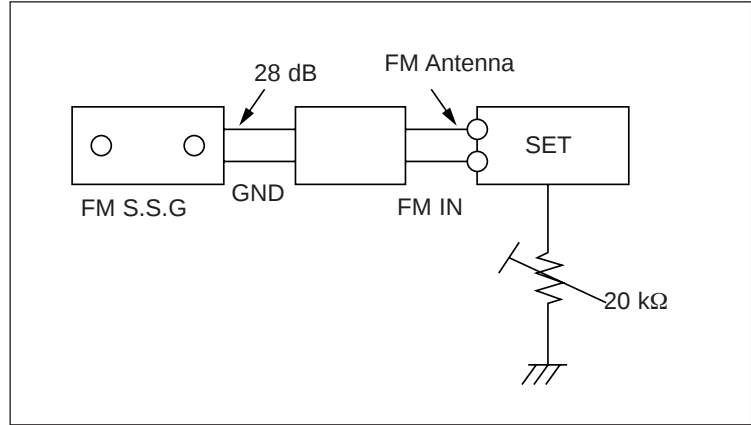


Figure1-2 FM Auto Search Level Adjustment

AM(MW) I.F Adjustment	
SSG FREQ.	450 kHz
Frequency	522 kHz
Adjustment point	AM IF
Maximum output (Figure 1-3)	

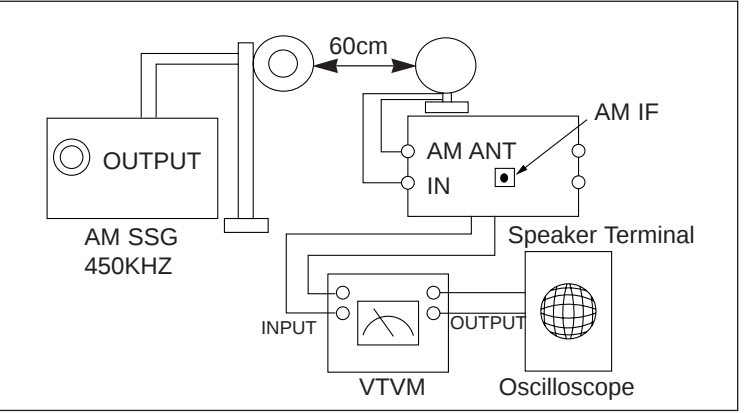


Figure1-3 AM I.F Adjustment

1-1-2 AM(MW),LW,SW1,SW2 Adjustment

	Circuit to be Adjusted	Measuring Instrument & Arrangement	Step	S.S.G Frequency	Radio dial Setting	Adjusting Point	Adjust for
AM (MW)	OSC	Connect AM signal generator to loop antenna,VTVM AND oscilloscope (Fig 1-3)	1	522KHz	522KHz	MW OSC	Aduust for 1.0V±0.1V at the low. (IR117)
			2	1611KHz	1611KHz	MW OSC	Check for 7.0V±1.0V at the high. (IR117)
	RF	“	1	594KHz	594KHz	MW ANT	Maximum out
	INTER FREQ	“	1	455KHz	522KHz	TL2	Maximum out
LW	OSC	Fig 1-3	1		146KHz	LW OSC	Aduust for 2.0V±0.1V at the low.
			2		290KHz	LW OSC	Check for 7.0V±1.0V at the high.
	RF		1	150KHz	150KHz	LW ANT	Maximum out
SW1	OSC	Fig 1-3	1		2.3MHz	SW1 OSC	Aduust for 1.0V±0.1V at the low.
			2		7.3MHz	-	Check for 8.5V±1.0V at the high.
	RF		1	3.5MHz	3.5MHz	SW1 ANT	Maximum out
SW2	OSC	Fig 1-3	1		9.5MHz	SW2 OSC	Aduust for 1.5V±0.1V at the low.
			2		26.1MHz	-	Check for 8.0V±1.0V at the high.
	RF		1	10MHz	10MHz	SW2 ANT	Maximum out

1-2 Cassette Deck

1-2-1 To Adjust Tape Speed

Notes

- 1) Measuring tape: i) MTT-111 (or equivalent)
(Tapes recorded with 3kHz)
ii) MTT-5512 (or equivalent)
- 2) Connect the cassette deck to the frequency counter as in figure 1-4.

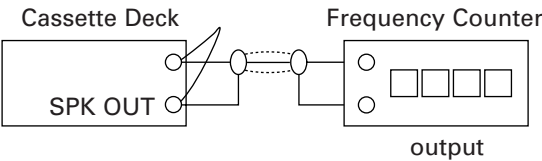


Figure 1-4

Step	Item	Pre-Setup Condition	Pre-Setup	To Adjust	Standard	Remark
1	NOR SPEED Control	OUT (connected to the frequency counter)	1) Deck 1:MTT-111 2) Press PLAY SW button 3) Deck 2:MTT-5512	Turn USR1 to left and right	3KHz	

Adjust REC Bias Voltage

Step	Item	Pre-Setup Condition	Pre-Setup	To Adjust	Standard	Remark
1	REC Bias Voltage	Connect to DCW2 as in Fig.1-7 and read the VTVM.	Input MTT-5512 into Deck2,then press REC button.	L-CH;DSR2 and R-CH;DSR1 to the right and left.	6V	See diagram for adjustment location


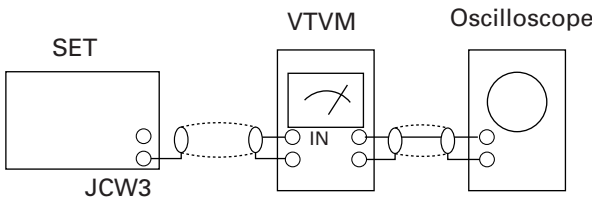


Figure 1-7

1-2-2 To Adjust PlayBack Level

Notes

- 1) Before the actual adjustment, clean the play/recording head.
- 2) Measuring tape :
i) MTT-114(or equivalent 10kHz AZIMUTH control)
ii) MTT-112(or equivalent) :
- 3) The cassette deck is connections as shown in figure 1-6.

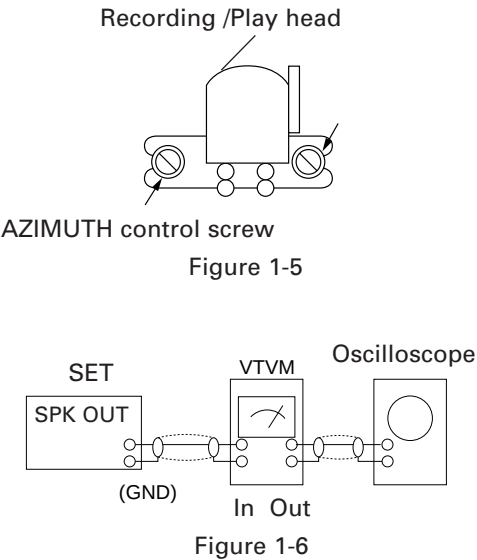

① Adjust Deck 1 Play Level


Step	Item	Pre-Setup Condition	Pre-Setup	To Adjust	Standard	Remark
1	AZIMUTH	SPK OUT (VTVM is connected to the scope)	After putting MTT-114 into Deck 1 1)Press PLAY button.	1) Turn the control screw to as shown in Figure 1-5.	Max output and same phase (both channels)	After adjustment secure it with REGION LOCK.
2	PlayBack out Level	Same as above	PLAY MTT-112 on Deck 1.	L-CH:Turn JSR2L to the right and left R-CH : fixed.	Adjust to level and same as R-CH.	See the diagram for adjustment locations.

② Adjust Deck 2 Play Level

Step	Item	Pre-Setup Condition	Pre-Setup	To Adjust	Standard	Remark
1	AZIMUTH	SPK OUT (VTVM is connected to the scope)	After putting MTT-114 into Deck 2 1)Press PLAY button.	1) Turn the control screw to as shown in Figure 1-5.	Max output and same phase (both channels)	After adjustment secure it with REGION LOCK.
2	PlayBack out Level	Same as above	PLAY MTT-150 on Deck 2.	No Adjustment	Check level and same as Deck1 level	See the diagram for adjustment locations.


2.Exploded Views and Parts List

2-1 Cassette Deck :ADR246AMW(OPTION)

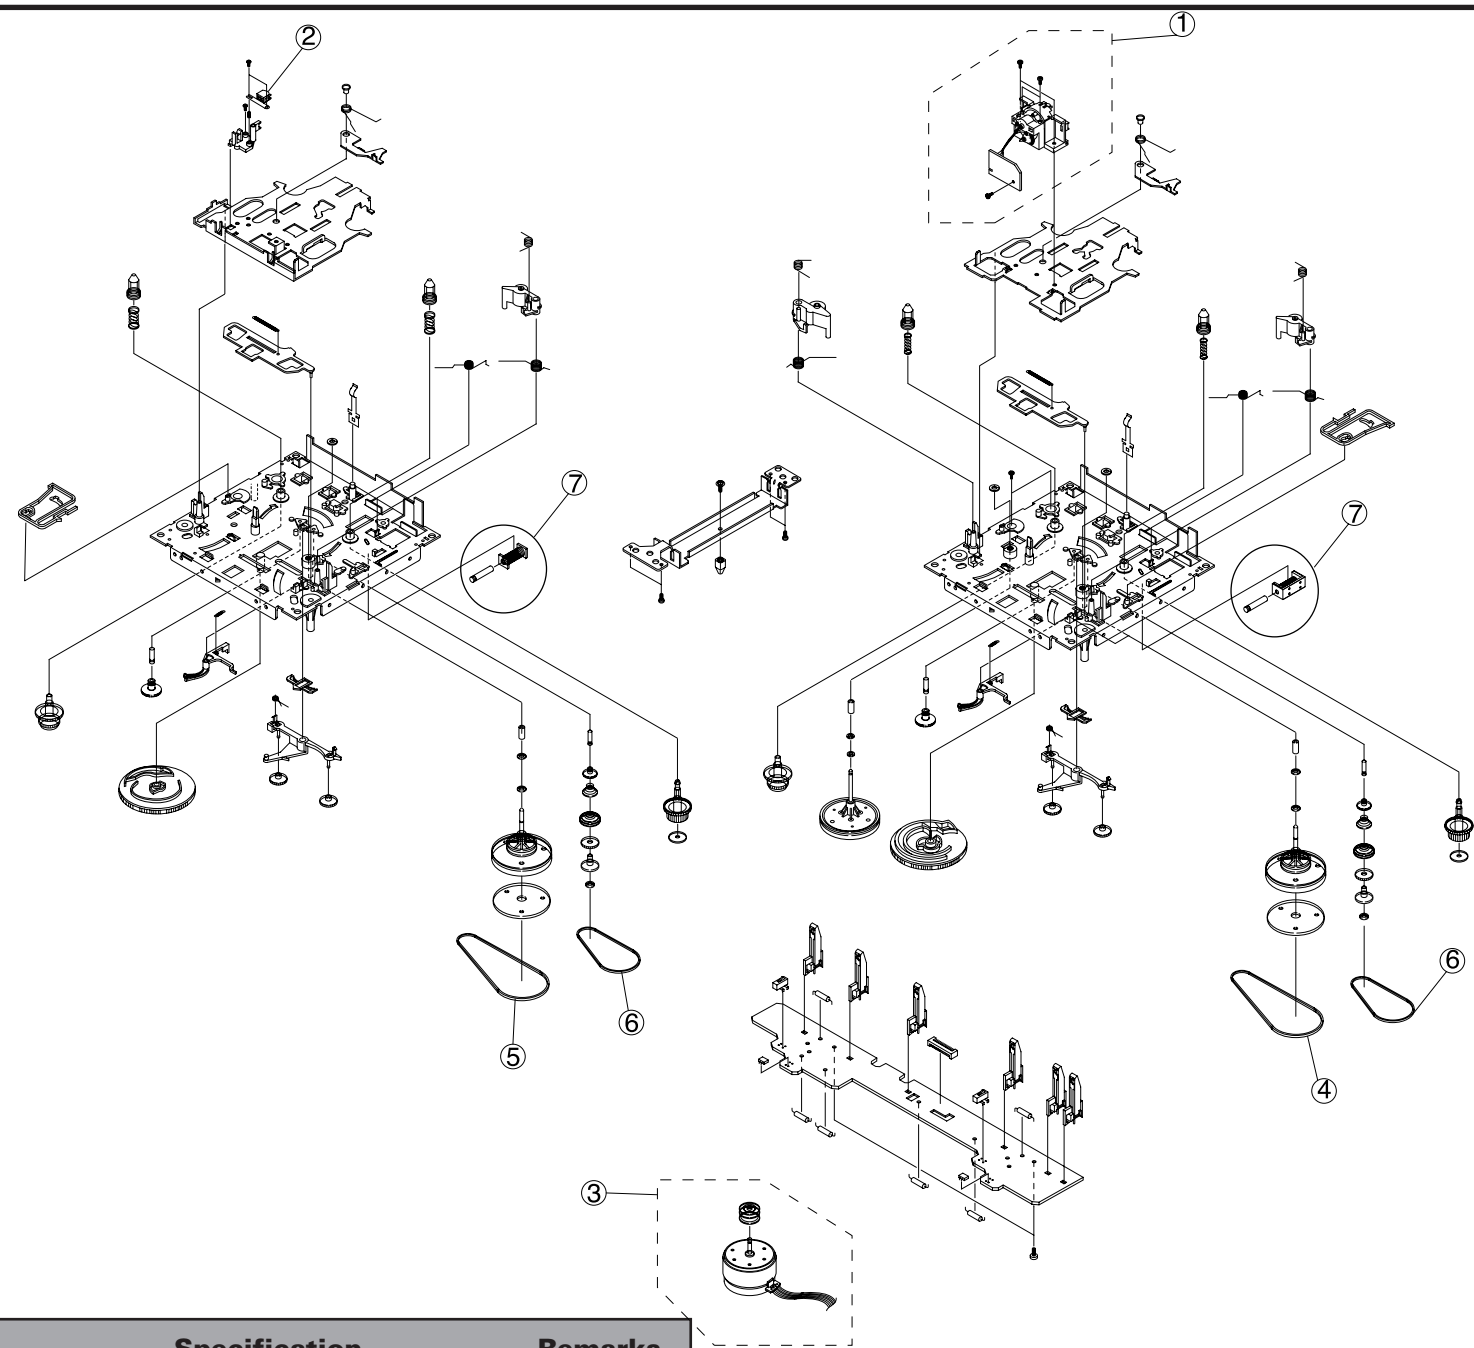

No.	Code No.	Description	Specification	Remarks
	AH59-00075A	DECK-CASSETTE	ADR246AMW	
1	AH81-00368A	ASS.Y RP HEAD	ADR2400-RP(SANKYO)	MT91-11010T
2	AH81-00141A	HEAD PB	TC881CB	MT59-00044A
3	AH81-00363A	ASS,Y MOTOR	ADR2400-SHU2L	MT91-15012J
4	AH81-00364A	BELT MAIN1	ADR2400-MAIN 0.5	6602-001056
5	AH81-00365A	BELT MAIN2	ADR2400-MAIN 1.3	6602-001057
6	AH81-00101A	BELT SUB	ADR2400-FR	6602-001055
7	AH81-00102A	SOLENOID	ADR2400-1	MT75-00049A

2-2 Total Exploded View and Parts List

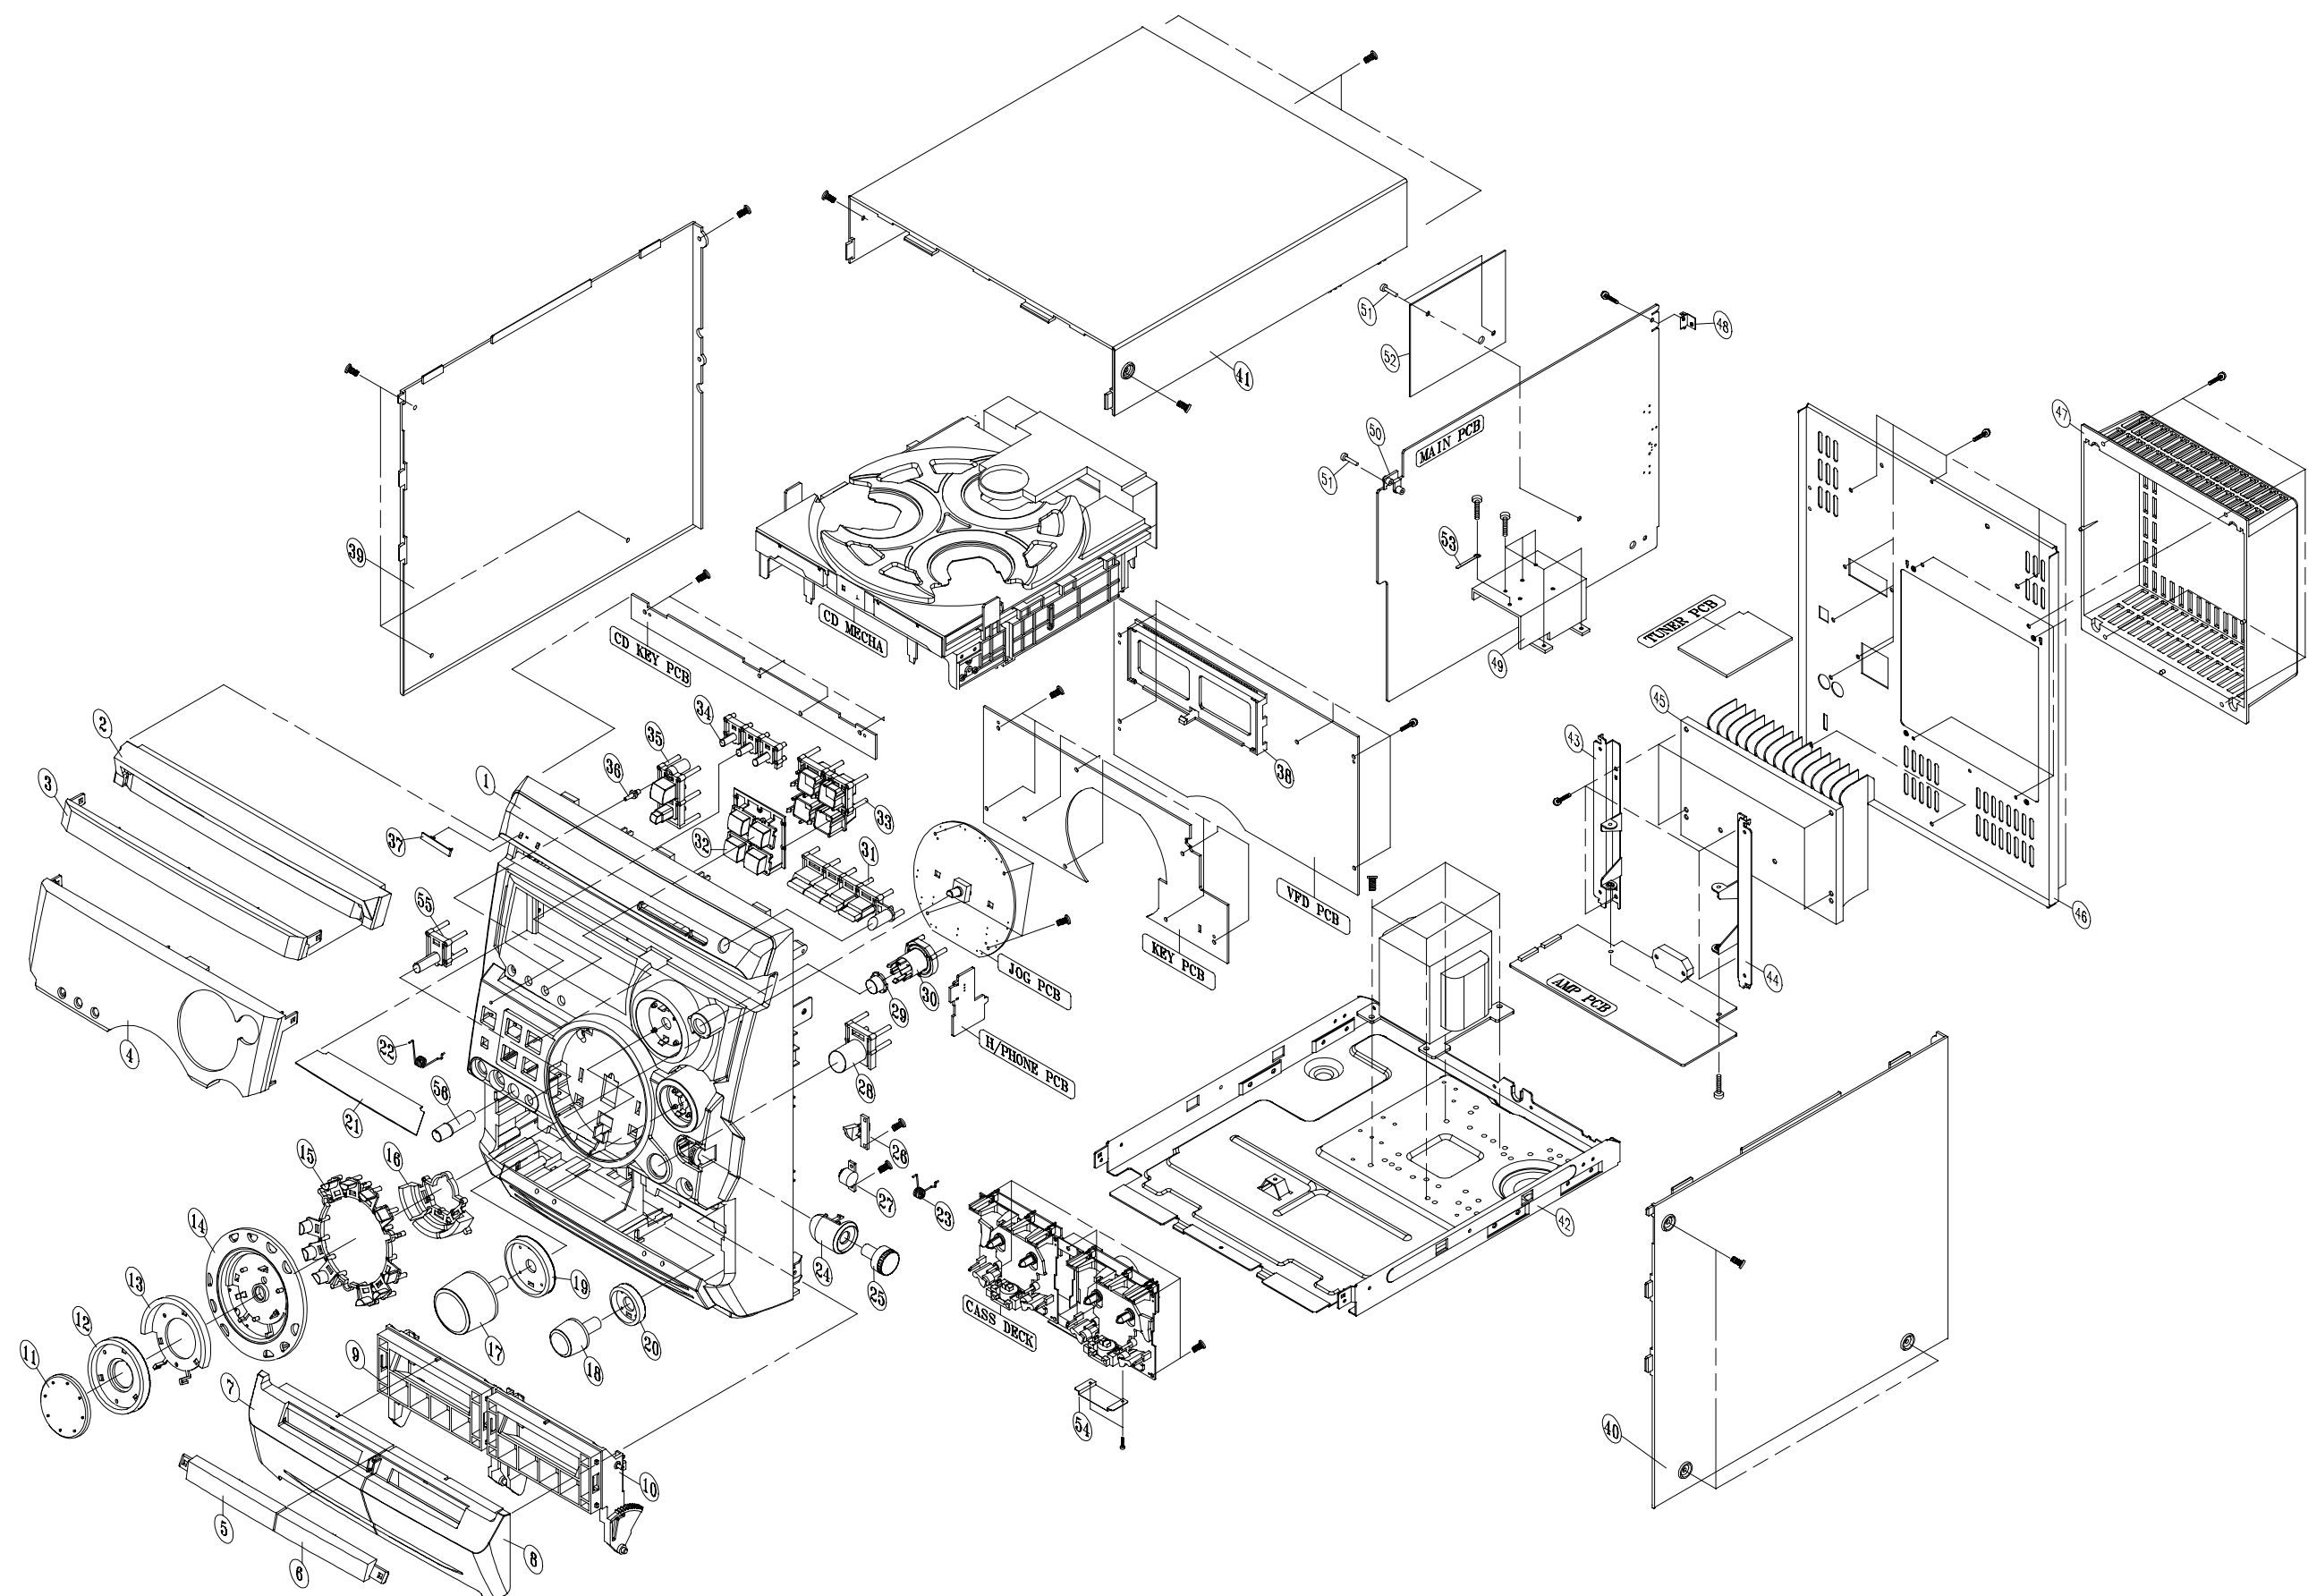


*** Parts List of Total Exploded view**

No.	Code No.	Description ; Specification	Q'ty	REMARK
1	AH64-01720B	CABINET-FRONT	MIPS L/GRAY	1 NO MIC
	AH64-01720C	CABINET-FRONT	MIPS L/GRAY	1 MIC,W/OUT ECHO
	AH64-01720D	CABINET-FRONT	MIPS DARK/GRAY	2 MIC,W/ECHO—XFO
	AH64-01720E	CABINET-FRONT	MIPS L/GRAY	2 MIC,W/ECHO
2	AH64-01722B	DOOR-CD	ABS L/GRAY	1 BASIC
	AH64-01722C	DOOR-CD	ABS D/GRAY	XFO
3	AH64-01725B	WINDOW-CD,DOOR	PMMA GRAY	1 MAX-B550
	AH64-01725C	WINDOW-CD,DOOR	PMMA GRAY	MAX-B570
	AH64-01725D	WINDOW-CD,DOOR	PMMA GRAY	MAX-B555
	AH64-01725E	WINDOW-CD,DOOR	PMMA GRAY	MAX-VB555
	AH64-01725F	WINDOW-CD,DOOR	PMMA GRAY	MAX-ZB550
	AH64-01725K	WINDOW-CD,DOOR	PMMA GRAY	MAX-VB550
4	AH64-01726B	WINDOW-VFD	PMMA GRAY	1 RDS
	AH64-01726C	WINDOW-VFD	PMMA GRAY	NO RDS
5	AH64-01727B	WINDOW-DOOR,A	PMMA GRAY	1
6	AH64-01728B	WINDOW-DOOR,B	PMMA GRAY	1
7	AH64-01723B	DOOR-CASS,A	ABS L/GRAY	1 AUTO STOP
	AH64-01723C	DOOR-CASS,A	ABS D/GRAY	XFO
8	AH64-01724B	DOOR-CASS,B	ABS L/GRAY	1 AUTO REVERSE
	AH64-01724C	DOOR-CASS,B	ABS D/GRAY	XFO
9	AH61-00971A	HOLDER-CASS A	ABS L/GRAY	1
	AH61-00971B	HOLDER-CASS A	ABS D/GRAY	XFO
10	AH61-00972A	HOLDER-CASS B	ABS L/GRAY	1
	AH61-00972B	HOLDER-CASS B	ABS D/GRAY	XFO
11	AH64-01739B	KNOB-JOG	ABS L/GRAY	1
12	AH67-00164B	LENS-JOG	PMMA BLUE	1 BASIC
	AH67-00164D	LENS-JOG	PMMA BLUE	MAX-ZB550
13	AH61-00976B	CAP-DUMMY	ABS NATURAL	1
14	AH61-00975B	CAP-JOG	ABS L/GRAY	1
15	AH64-01732B	KNOB-DECK	ABS NATURAL	1
16	AH64-01733B	KNOB-SEARCH	ABS NATURAL	1
17	AH64-01736B	KNOB-VOLUME	ABS L/GRAY	1
18	AH64-01737B	KNOB-WOOFER	ABS L/GRAY	1
19	AH67-00163A	LENS-VOLUME	PMMA BLUE	1
20	AH67-00165A	LENS-WOOFER	PMMA BLUE	1
21	AH63-00396A	SHEET-VFD	PVC T0.5	1
22	AH61-00552A	SPRING-EJECT,A	STS 1.0	1
23	AH61-00553A	SPRING-EJECT,B	STS 1.0	1
24	AH61-00974B	CAP-S.MODE	ABS L/GRAY	1 SOUND MODE
	AH61-00974C	CAP-S.MODE	ABS L/GRAY	LATIN SOUND
	AH61-00974D	CAP-S.MODE	ABS D/GRAY	XFO
25	AH64-01738B	KNOB-S.MODE	ABS NATURAL	1
26	AH95-50001A	LATCH-ASSi@Y	POM BLK	2
27	AH61-80030A	DAMPER-GEAR	POM BLK	2
28	AH64-01734B	KNOB-ENTER	ABS L/GRAY	1
29	AH67-00162B	LENS-P/SOUND	PMMA ORANGE	1
30	AH61-00981A	HOLDER-P SOUND	ABS L/GRAY	1

No.	Code No.	Description ; Specification	Q'ty	REMARK
31	AH64-01729B	KNOB-OPEN	ABS L/GRAY	1
32	AH67-00161B	LENS-FUNCTION	PMMA BLUE	1
33	AH61-00979A	HOLDER-FUNCTION	PC+ABS WHITE	1
34	AH64-01730B	KNOB-TIMER	ABS L/GRAY	1
35	AH64-01731B	KNOB-POWER	ABS L/GRAY	1
36	AH67-00166A	LENS-POWER	PMMA MILKY	1
37	AH64-70003K	BADGE-BRAND	ABS 94HB, SILVER	1
38	AH61-00521A	HOLDER-VFD	ABS BLACK	1
39	AH64-00900A	CABINET-SIDE L	MIPS 94HB	1
40	AH64-00901A	CABINET-SIDE R	MIPS 94HB	1
41	AH64-30443F	CABINET-TOP	MIPS 94HB	1
42	AH64-30416E	CABINET-BOTTOM	SECC T0.8	1
43	AH61-00973A	BRKT-H SINK L	SECC T1.0	1
44	AH61-00977A	BRKT-H SINK R	SECC T1.0	1
45	AH62-00063B	HEAT-SINK M	AL EXTR	1
46	AH64-01721A	CABINET-REAR	MIPS GRAY	1
	AH64-01721B	CABINET-REAR	MIPS GRAY	DIGITAL OUT
47	AH61-01036A	COVER-REAR	ABS L/GRAY	1
48	AH61-00685A	BRKT-PCB	SECC T0.8	1
49	AH62-00044A	HEAT-SINK IC	AL T3.0	1
50	AH61-00021B	SUPPORT-PCB	ABS BLK	1
51	AH61-40014A	SUPPORT-RIVET	ABS ASS'Y	3
52	AH63-00278A	COVER-PCB	PVC T0.5	1
53	AH65-30010A	CLAMP-WIRE	DALB-2	2
54	AH61-00413B	BRKT-DECK	SPTE T0.4	1
55	AH64-01735B	KNOB-ECHO	ABS L/GRAY	1 OPTION
56	AH64-01715B	KNOB-MIC VOL	ABS L/GRAY	1 OPTION

2-3 CD Deck Exploded View and Parts list

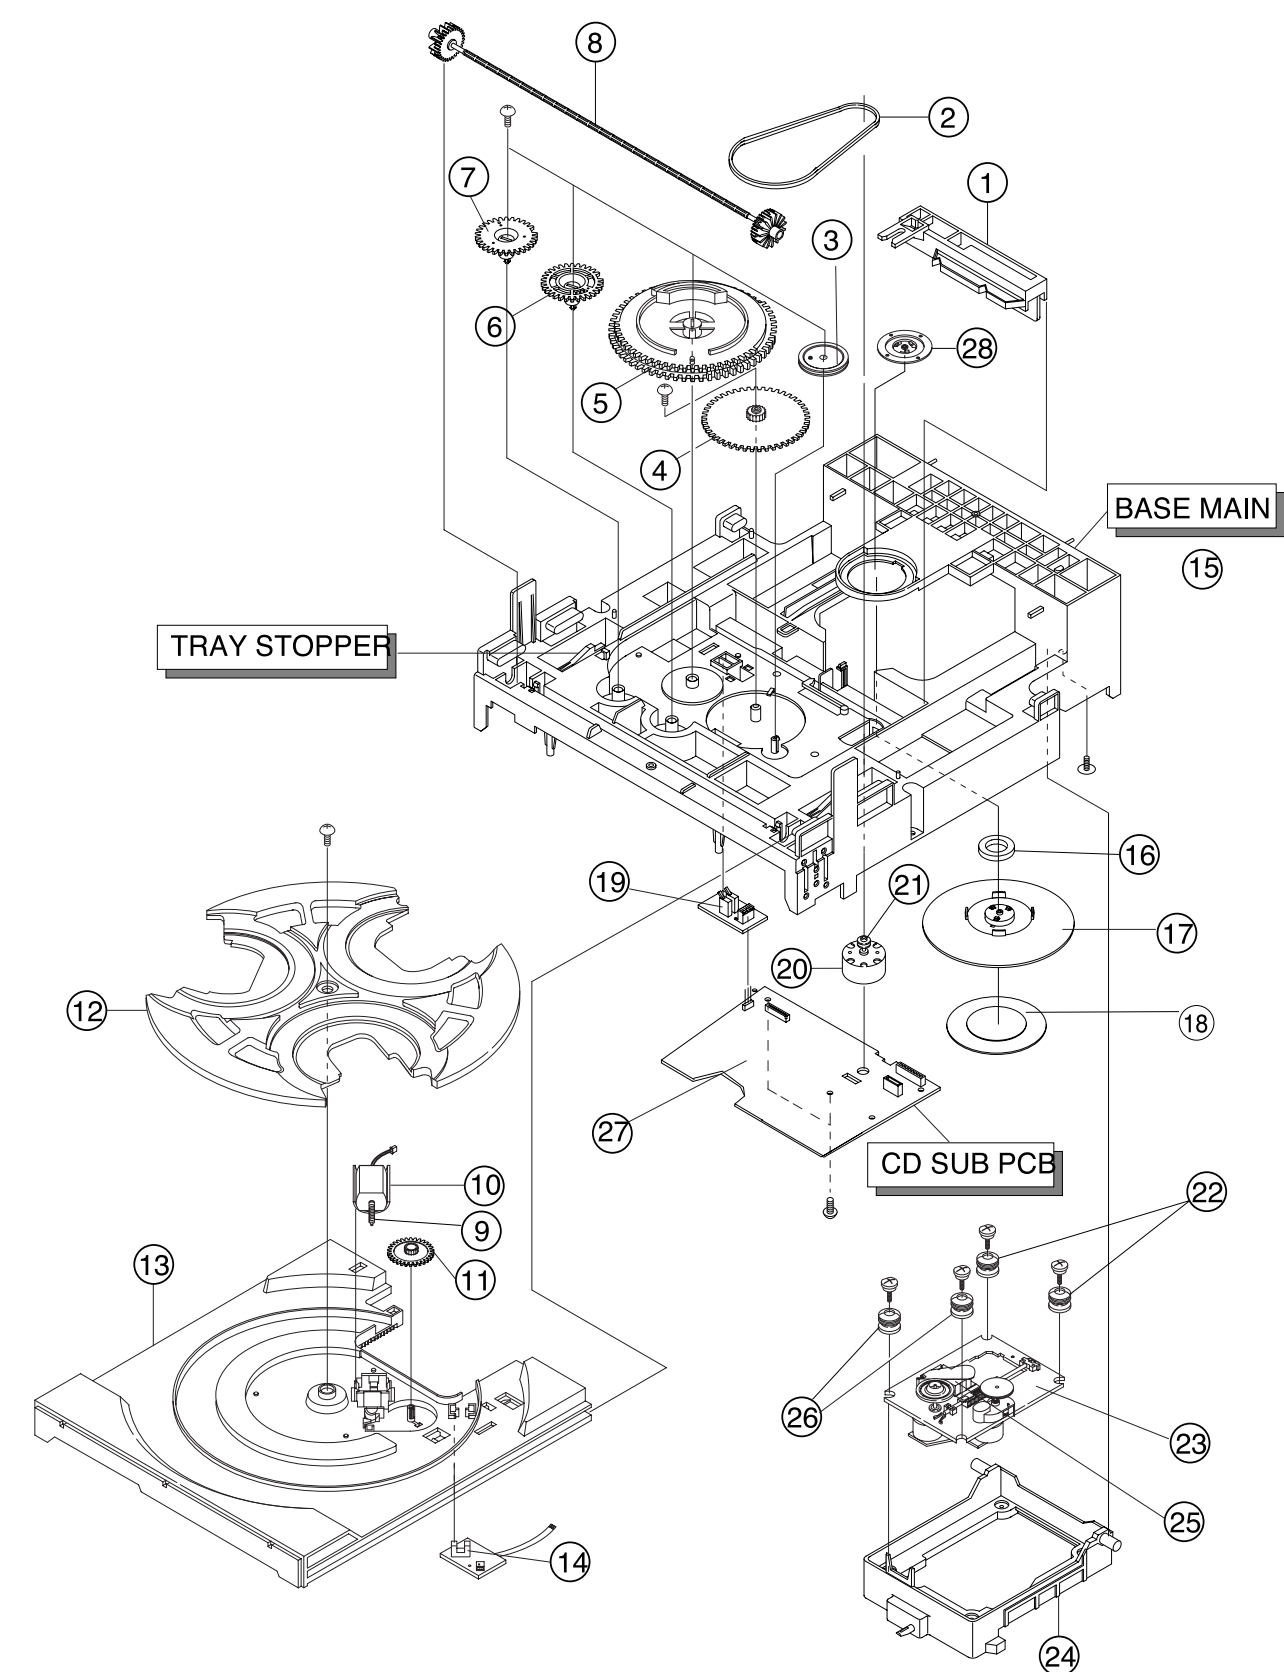


No.	Code No.	Description	Specification	Remarks
	CMS300-V	ASS'Y-DECK	CMS-300	
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188B	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189B	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190B	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH66-20192A	GEAR-WORM	POM(M90-44),M0.5,PCD4.5	
10	AH31-12001A	MOTOR-LOADING	FF-030PN-09120	
11	AH66-20193A	GEAR-ROULLETE	POM(M90-44) BLK	
12	AH63-00324A	TRAY-ROULLETE	ABS XR-401 BLK	
13	AH63-00325A	TRAY-DISC	ABS BLK	
14	AH32-10001F	SENSOR	KPI-L06	
15	AH61-00837A	BASE-MAIN	ABS,NATURAL,CMS-300	
16	3302-000159	MAGNET	AC,3500-3800G,2.6-3.2MGOe,30	
17	AH63-90053A	TABLE-CHUCK	,ABS,+GF20%,BLK,	
18	AH63-00068B	SHEET-CHUCK	SHEET,HYMERON,BLK,0.4T	
19	3405-000101	SWITCH -MICRO	MLS-24	
20	AH31-10021A	MOTOR-DC	RF-500TB,9VDC/130MA	
21	AH66-10008A	PULLEY-MOTOR	POM,BLK,CMS-CR3	
22	AH73-10031A	RUBBER-CD(R)	SI,CMS-300,40,RED	
23	AH91-60150C	CDP DECK ASSY	CMS-D73SG6U	
24	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
25	AH30-00007A	PICK-UP	SOH-AD3	
26	AH73-10034A	RUBBER-CD(G)	SI,CMS-300,40,GREEN	
27	AH92-00922A	ASS'Y PCB CD MAIN		
28	AH61-00225A	BRKT-CHUCK	SECL 0.8t	

2-4 SPEAKER Exploded View and Parts list

2-4-1 MAXB550/MAXZB550

* CAUTION : It is used the bonding, connet NET FRAME(or FRONT PANEL ASS'Y) to CABINET ASS'Y.
So when the disassembly, take extreme care not to damage the SPEAKER.

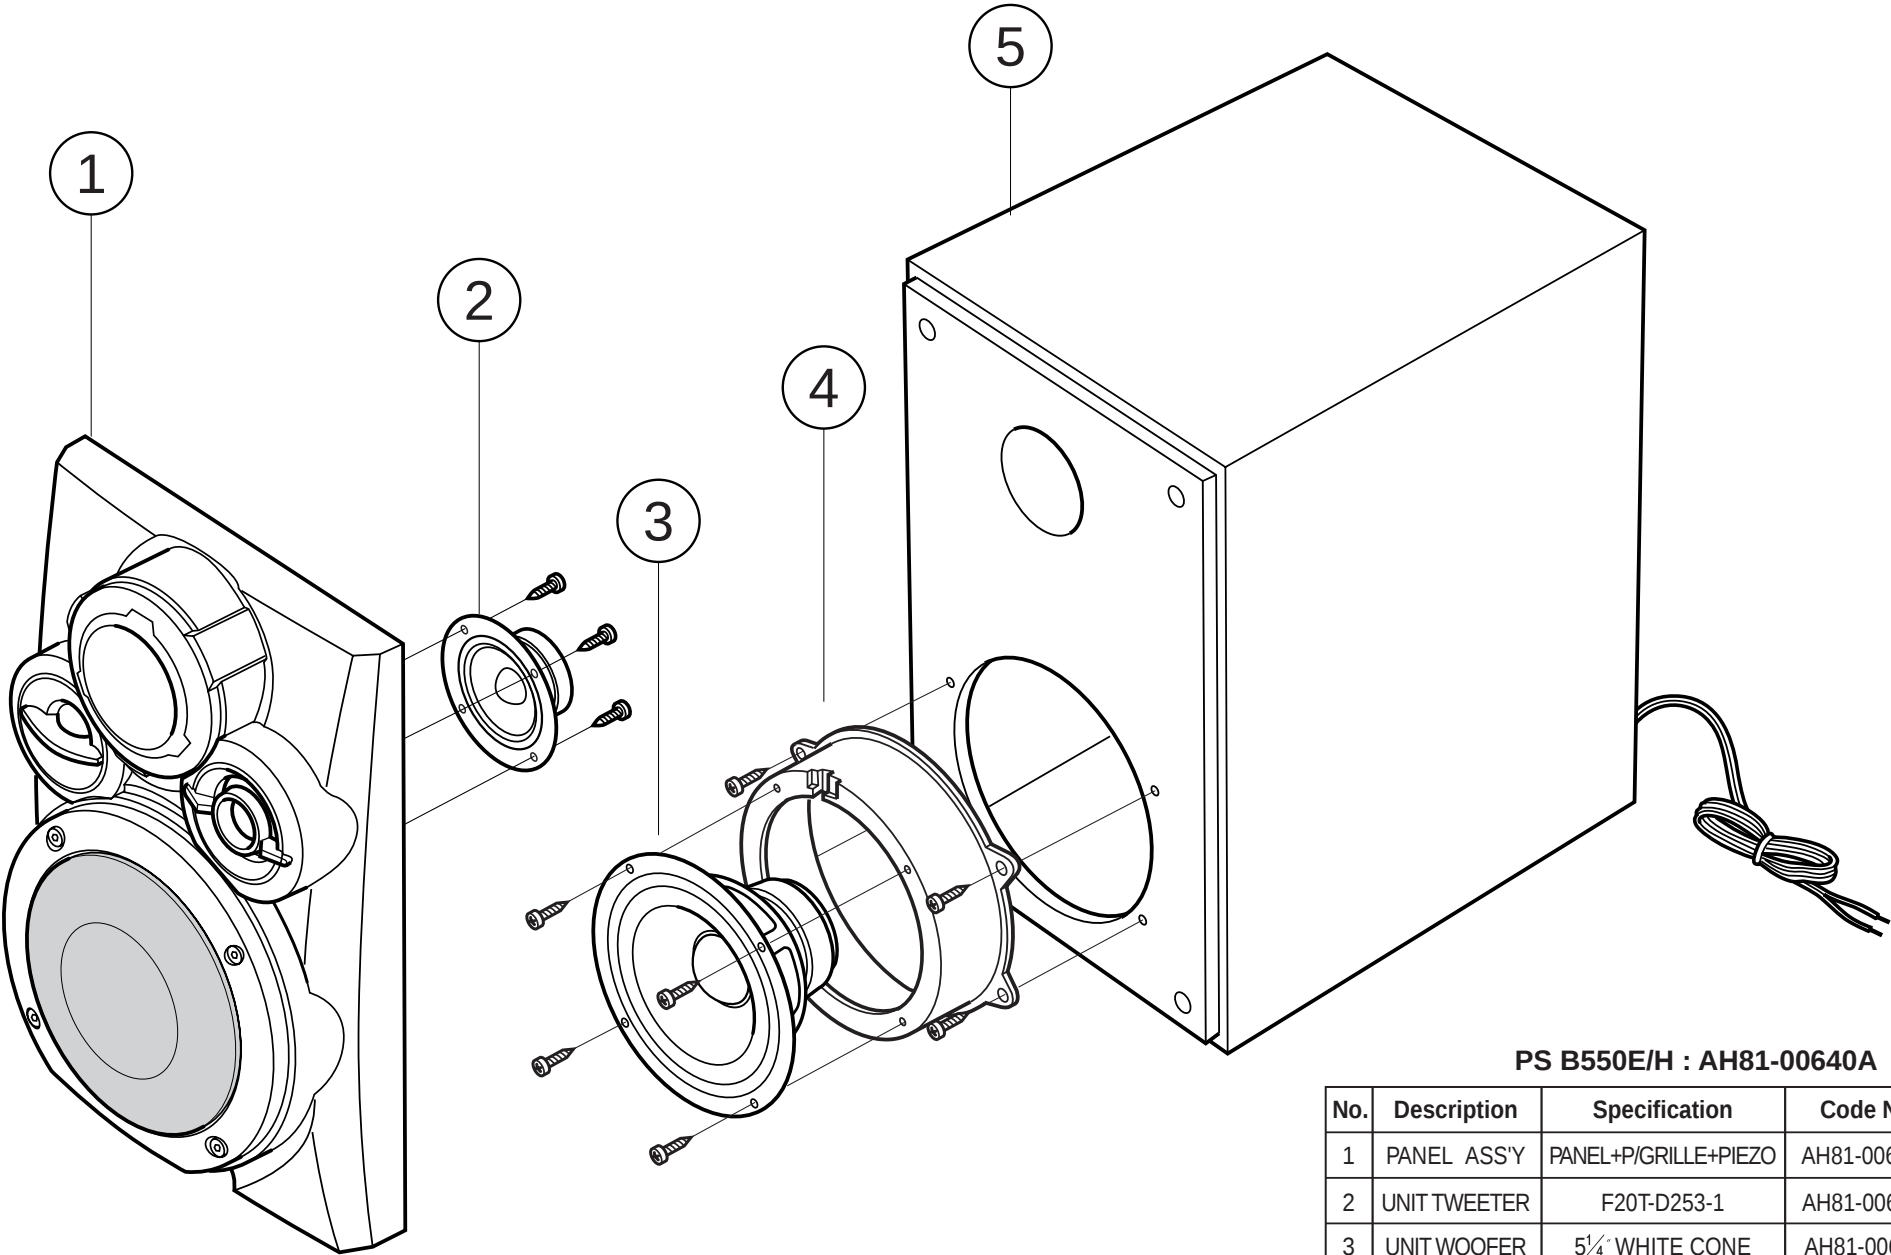


PS B550E/H : AH81-00640A

No.	Description	Specification	Code No.	Q'TY
1	PANEL ASS'Y	PANEL+P/GRILLE+PIEZO	AH81-00640Q	1
2	UNIT TWEETER	F20T-D253-1	AH81-00609R	1
3	UNIT WOOFER	5¼" WHITE CONE	AH81-00640J	1
4	WOOFER RING	HIPS BLK	AH81-00640E	1
5	CABINET ASS'Y	PB 9t / 12t	AH81-00640G	1


2-4-2 MAXB570

* CAUTION : It is used the bonding, connet NET FRAME(or FRONT PANEL ASS'Y) to CABINET ASS'Y.
So when the disassembly, take extreme care not to damage the SPEAKER.

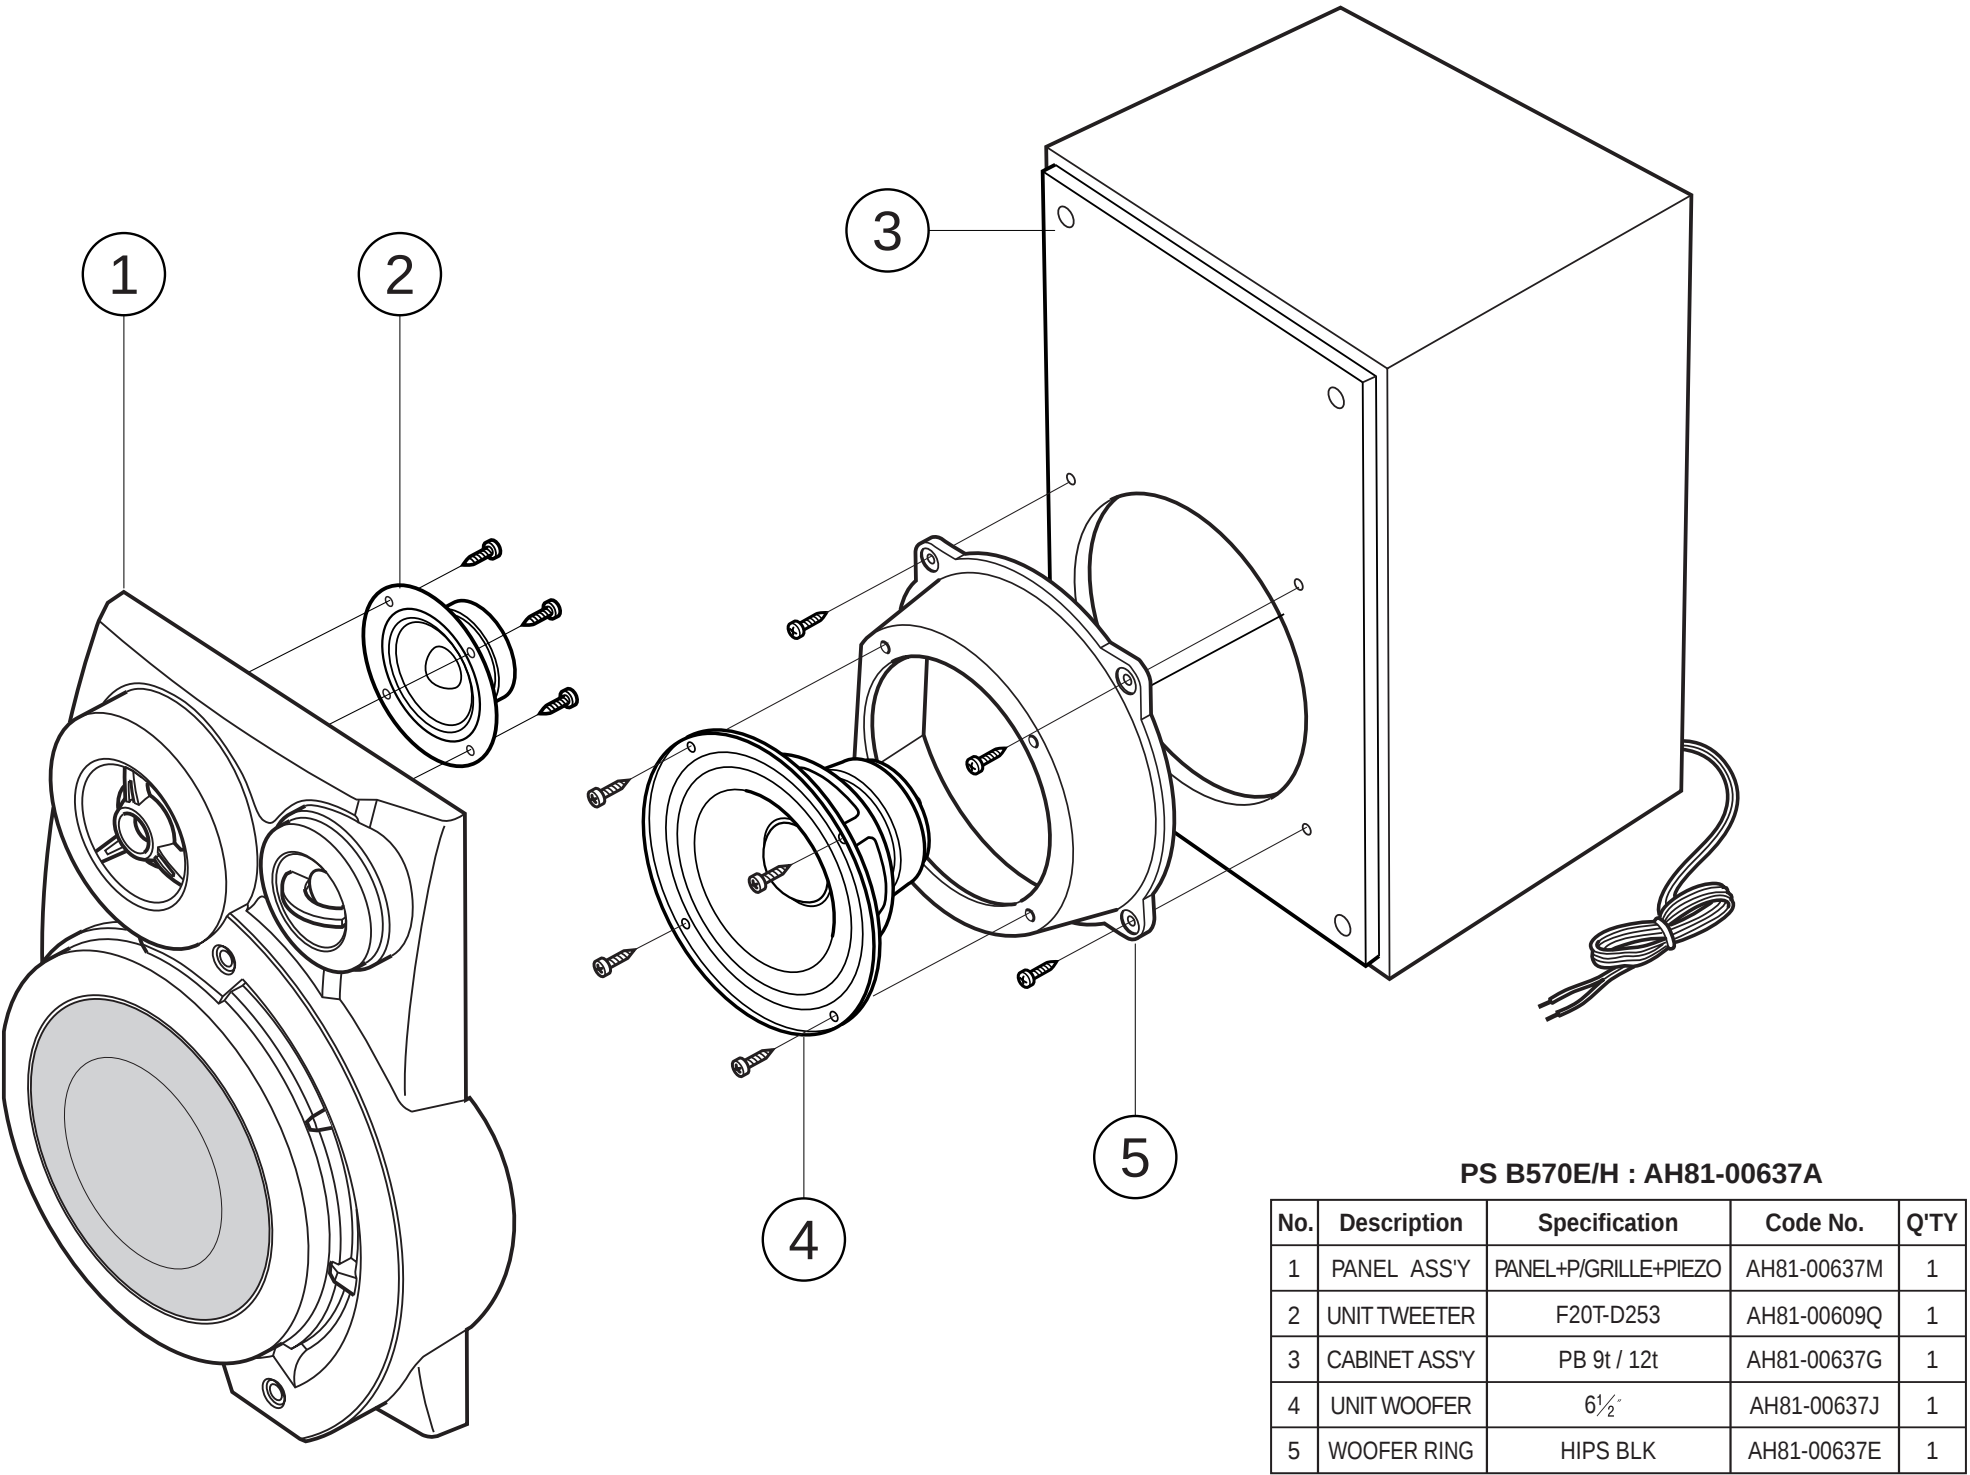

2-4-3 MAXB555

* CAUTION : It is used the bonding, connet NET FRAME(or FRONT PANEL ASS'Y) to CABINET ASS'Y.
So when the disassembly, take extreme care not to damage the SPEAKER.

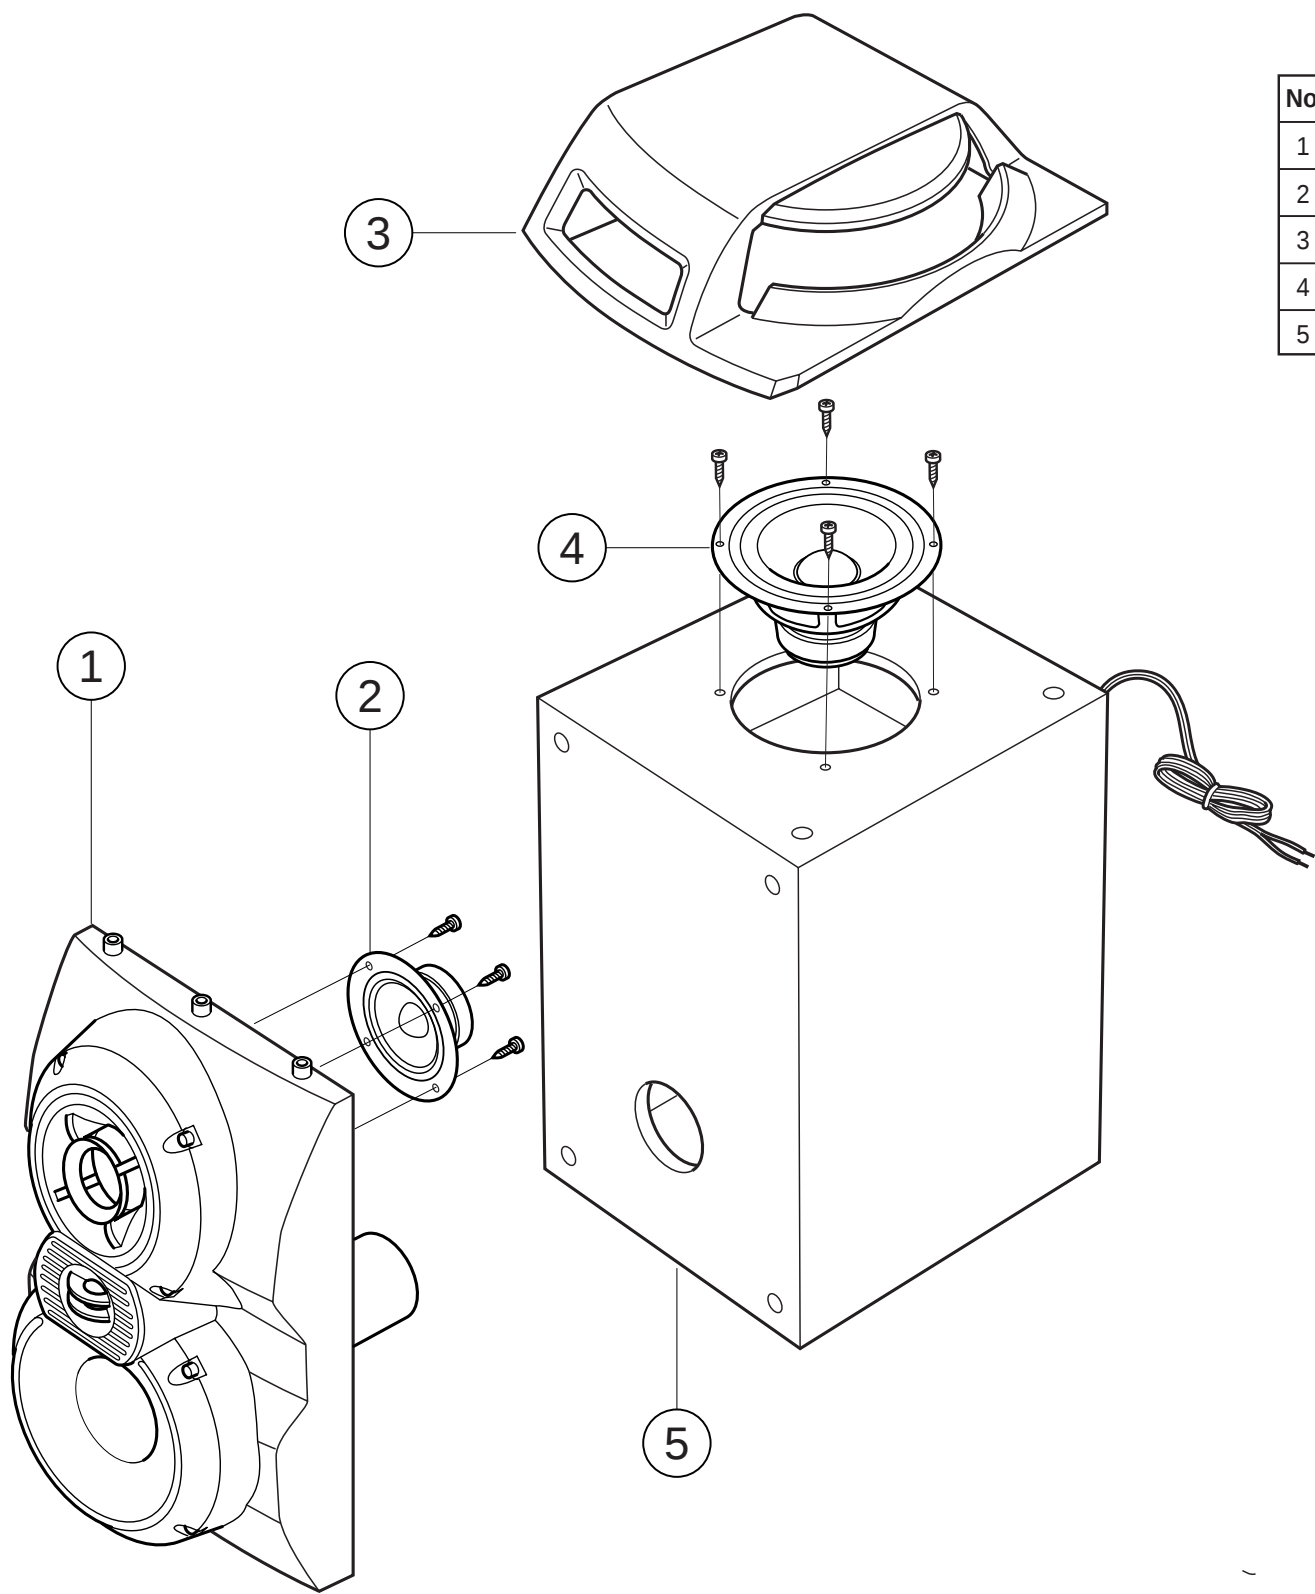

PS B555E/H : AH81-00643R

No.	Description	Specification	Code No.	Q'TY
1	PANEL ASS'Y	PANEL+PIEZO	AH81-00643P	1
2	UNIT TWEETER	2"	AH81-00643L	1
3	TOP PANEL ASSY	T/PANEL + REFLECTOR	AH81-00643Q	1
4	UNIT WOOFER	5¼"	AH81-00643S	1
5	CABINET ASS'Y	PB 9t / 12t	AH81-00643T	1

3. Electrical Parts List

Location no	Code no.	Description	Specification	Remarks	Location no	Code no.	Description	Specification	Remarks
**** MAXB550/B555/B570 PARTS LIST ****					R808	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164A	TRANS POWER,-,MAX-B550,230V,50HZ.	MAX-B550		R807	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164B	TRANS POWER,-,MAX-B550,127V,60HZ	MAX-B550		DR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164C	TRANS POWER,-,MAX-B550,110/220V,60/50HZ	MAX-B550		DR1	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164D	TRANS POWER,-,MAX-B550,230/264V,50HZ	MAX-B550		R813	2007-000941	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164F	TRANS POWER,-,MAX-B570,230V,50HZ.	MAX-B570		R129	2007-000941	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164G	TRANS POWER,-,MAX-B570,127V,60HZ	MAX-B570		R123	2007-000941	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164H	TRANS POWER,-,MAX-B570,110/220V,60/50HZ	MAX-B570		R126	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164J	TRANS POWER,-,MAX-B570,230/264V,50HZ	MAX-B570		R120	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH26-00164K	TRANS POWER,-,MAX-B570,220V,50/60HZ	MAX-B570		R104	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH39-00257A	POWER CORD;2-88,-,CP2;250V,2.5A,1830MM			R103	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH40-00008A	TUNER-PACK ASSY;KST-MB114LS1-30.FM/MW/LW			R102	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH42-20001P	ANT LOOP,-,KS971120-01,18.5UH#±10%,			R101	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R115	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R112	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R105	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R106	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R119	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R127	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R107	2007-001216	R-CHIP;820OHM,5%,1/10W,DA,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			R301	2008-000140	R-FUSIBLE;2.2ohm,5%,1/2W,AA,TP,3.5x9.4mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C806	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C805	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C804	2202-000243	C-CERAMIC,MLC-AXIAL;33pF,5%,50V,SL,TP,3.		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C603A	2202-000780	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,50V,Y5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC13	2202-000780	C-CERAMIC,MLC-AXIAL;100nF,+80-20%,50V,Y5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC131	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC132	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C204	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C205	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C211	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC130	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC115	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC116	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC118	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC124	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC129	2203-000203	C-CERAMIC,CHIP;100nF,10%,16V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC214	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC216	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC218	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C304	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C305	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C401	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C402	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC105	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC121	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC134	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C207	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C209	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC213	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC126	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC127	2203-000595	C-CERAMIC,CHIP;0.22nF,5%,50V,NP0,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C803	2203-000787	C-CERAMIC,CHIP;0.33nF,5%,50V,NP0,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC119	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC128	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC125	2203-000840	C-CERAMIC,CHIP;0.39nF,5%,50V,NP0,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C208	2203-000858	C-CERAMIC,CHIP;0.039nF,5%,50V,NP0,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC112	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC111	2203-000892	C-CERAMIC,CHIP;4.7nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC124A	2203-001064	C-CERAMIC,CHIP;56nF,10%,50V,NP0,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC106	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC122	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C203	2203-001223	C-CERAMIC,CHIP;0.82nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC102	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC117	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C502L	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C502R	2203-001537	C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC104	2203-001551	C-CERAMIC,CHIP;1.5nF,10%,50V,X7R,TP,2012		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C201	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C202	2203-001619	C-CERAMIC,CHIP;0.027nF,5%,50V,NP0,TP,201		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC215	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC217	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C302	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C303	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC212	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC133	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC108	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC107	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC101	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC123	2401-000419	C-AL;10uF,20%,16V,GP,-,4x7.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C301	2401-001102	C-AL;330uF,20%,16V,GP,TP,8x11.5mm,5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC114	2401-001625	C-AL;6.8uF,20%,50V,GP,TP,5x11.5		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C501R	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C501L	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC135	2401-001968	C-AL;470nF,20%,50V,GP,TP,5x11mm,5mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			IC120	2401-001968	C-AL;470nF,20%,50V,GP,TP,5x11mm,5mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			C801	2401-002183	C-AL;220uF,20%,16V,GP,TP,8x9.5mm		
	AH59-00134H	REMOCON-ASSY;MAX-B550,SAMSUNG,-,;27KEY,			WIC801	AC14-12001G	IC;KA78L05,T-		

AH41-00282B	PCB—CD MAIN;G3H1-3CD;G3H1-3CD;CD MAIN,P	
AJ59-20150F	DECK-LDP;CVM55R2/EXP₁,₂,₃,₄	COMMON
3405-000101	SWITCH-MICRO1.6V1A,70gfs,SPST	
3710-00054A	CONNECTOR-SOCKET;42140-2203 3P ,1R,2.5MM	
3711-00082E	CONNECTOR-HEADER;BOX,2P,1R,2mm,ANGLE,SN	
AH31-10021A	MOTOR-DC-RF-500TB,9VDC1230mA,	
AH31-12001A	MOTOR-LOADING;FF-030PN-09210	
AH91-60150C	ASSY CDP DECK;CMS-D73SG6(U)	COMMON
3409-001078	SWITCH-LEAF;16Vdc,500mA,10gfs,SPST	
AH30-00007A	PICK UP:SOH-AD3,.....100°80°45,D73SG6	
AH81-00614A	A/S SHAFT-PU; METAL,.....	
AH81-00614B	A/S SCREW;..METAL,JA36-00601D,.....	
AH81-00614C	A/S SCREW;..METAL,6033-000294,.....	
AH81-00614D	A/S WASHER;..PBT,JA36-00608A,.....	
AH81-00614E	A/S SCREW(A);..PBT,JA36-00006A,.....	
AH81-00614F	A/S GEAR(B);..PBT,JA36-00005A,.....	
AH81-00614G	A/S GEAR(A);..PBT,JA36-00004A,.....	
AH81-00614H	A/S MOTOR-FEED;..AJ31-00601E,.....	
AH81-00614J	A/S MOTOR-PCB ASSY;..AJ41-00601S,.....	
AH81-00614K	A/S CONNECTOR;..AJ37-00601A,.....	

UC2	0904-001316	IC40 CONTROLLER:M66010,24BIT,SOP,32P,2
UX2	2801-001394	CRYSTAL-UNIT,32.768KHZ,20ppm,28-AAAY,12.5
UX1	2802-001174	RESONATOR-CERAMIC,10MHZ,0.5%,BK,BX3,5X3M
UVR4	3406-001047	SWITCH-ROTARY;5V DC,0.5mA,-,12mm
UVR2	3406-001047	SWITCH-ROTARY;5V DC,0.5mA,-,12mm
UVR1	3406-001054	SWITCH-ROTARY;5V DC,0.5mA,-,7.5mm
UVR3	3406-001054	SWITCH-ROTARY;5V DC,0.5mA,-,7.5mm
UCW12	3708-000178	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,ANGLE,S
UCW1	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH
UCW14	3708-000448	CONNECTOR-FPC/FFC/PIC,6P,1.25mm,STRAIGHT
UCW11	3708-000448	CONNECTOR-FPC/FFC/PIC,6P,1.25mm,STRAIGHT
UCW6	3708-000451	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH
UCW2	3708-000451	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH
UCW3	3708-000451	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH
UCW5	3708-000454	CONNECTOR-FPC/FFC/PIC,22P,1.25mm,STRAIGH
UCW7	3711-000827	CONNECTOR-HEADER,BOX,2P,1R,2mm,STRAIGHT,
UCW10	3711-001102	CONNECTOR-HEADER,BOX,7P,1R,2mm,STRAIGHT,
UJ1	3722-000351	JACK-PHONE,11P,3.5PI,AG,BLK,-
VFD	AH07-00066A	VF DISPLAY-HNA-16LM24T,MK-B550/570/VB55
UC1	AH11-00064A	MASK ROM:LC87664A-5274,MK-B550/570/VB55
UCW13	AH39-00109A	LEAD CONNECTOR ASSY,-,5295.51004,2P,140UM
UCW15	AH39-20561U	LEAD CONNECTOR ASSY,-,5295.51004,7P,150UM
REMOCON	AH59-60001J	MODULE REMOCON;GP1U217R,38KHZ,-,MESH,-,

[illegible][illegible]

Location no	Code no.	Description	Specification	Remarks
UR118	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP1.8x3.2m		
UR97	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP1.8x3.2m		
UR73	2001-000780	R-CARBON:470ohm,5%,1/8W,AA,TP1.8x3.2mm		
UR31	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR30	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR29	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR28	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR27	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR79	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR35	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR34	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR33	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR32	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR21	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR20	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR19	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR18	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR17	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR26	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR25	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR24	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR23	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR22	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR41	2001-000850	R-CARBON:560Kohm,5%,1/8W,AA,TP1.8x3.2m		
UR111	2001-000864	R-CARBON:56Kohm,5%,1/8W,AA,TP1.8x3.2mm		
UR98	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP1.8x3.2m		
UR108	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP1.8x3.2m		
UR90	2001-000995	R-CARBON:820ohm,5%,1/8W,AA,TP1.8x3.2mm		
UR85	2001-000995	R-CARBON:820ohm,5%,1/8W,AA,TP1.8x3.2mm		
UR117	2001-000995	R-CARBON:820ohm,5%,1/8W,AA,TP1.8x3.2mm		
UR100	2001-000995	R-CARBON:820ohm,5%,1/8W,AA,TP1.8x3.2mm		
UR115	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP2.4x6.4mm		
UR114	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP2.4x6.4mm		
UR113	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP2.4x6.4mm		
UR112	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP2.4x6.4mm		
UR68	2001-001178	R-CARBON(S):680ohm,5%,1/2W,AA,TP2.4x6.4		
UR67	2001-001178	R-CARBON(S):680ohm,5%,1/2W,AA,TP2.4x6.4		
UR66	2001-001178	R-CARBON(S):680ohm,5%,1/2W,AA,TP2.4x6.4		
UR63	2001-001178	R-CARBON(S):680ohm,5%,1/2W,AA,TP2.4x6.4		
USR1	2103-000341	VR-SEMI:2Kohm,30%,1/10W,TOP		
UC1A	2201-000163	C-CERAMIC,DISC:10nF,+80-20%,50V,Y5V,TP7		
UC8	2201-000389	C-CERAMIC,DISC:0.022nF,5%,50V,NP0,TP5x3		
UC9	2201-000389	C-CERAMIC,DISC:0.022nF,5%,50V,NP0,TP5x3		
UC5	2201-000532	C-CERAMIC,DISC:4.7nF,10%,50V,Y5P,TP8x3.		
UC4	2201-000565	C-CERAMIC,DISC:47nF,+80-20%,--,12.5x4mm		
UC20	2201-000565	C-CERAMIC,DISC:47nF,+80-20%,--,12.5x4mm		
UC1	2201-000565	C-CERAMIC,DISC:47nF,+80-20%,--,12.5x4mm		
UC23	2201-000783	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,		
UC19	2201-000783	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,		
UC18	2201-000783	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,		
UC17	2201-000783	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,		
UC16	2201-000783	C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP,		
UC6	2401-000240	C-AL:100uF,20%,10V,GP,TP5x11.5		
UC2	2401-000475	C-AL:10uF,20%,50V,GP,TP5x11mm,5mm		
UC3	2401-000475	C-AL:10uF,20%,50V,GP,TP5x11mm,5mm		
UC7	2401-000759	C-AL:220nF,20%,50V,GP,TP5x11mm,5mm		
UC12	2401-000907	C-AL:22uF,20%,16V,GP,TP5x11mm,5mm		
UC10	2401-001355	C-AL:470uF,20%,10V,GP,TP8x11.5mm,5		
UC13	2401-001364	C-AL:470uF,20%,16V,GP,TP10x12.5,5		
MC6	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
UC11	2401-002180	C-AL:2.2uF,20%,50V,GP,TP5x11mm,5mm		
UL1	2701-000178	INDUCTOR-AXIAL:33uH,10%,3x7mm		
UL2	2701-000178	INDUCTOR-AXIAL:33uH,10%,3x7mm		
USW28	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW29	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW3	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW27	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW26	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW25	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW24	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW9	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW8	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW7	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW6	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW5	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW4	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW30	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW23	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW15	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW14	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW13	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW12	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW11	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW10	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW1	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW22	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW21	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW20	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW2	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW17	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW18	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
USW19	3404-000165	SWITCH-TACT:12V,50mA,160gf,6x6mm,SPST		
	AH41-00432A	PCB,MAX-B550J570VB555,-,--,247		

Location no	Code no.	Description	Specification	Remarks
	AH92-01353A	ASSY PCB;MAX-B550,ASSY-MAIN		MAX-B550
RBD2	0402-000450	DIODE-BRIDGE:PBL403,200V,4.0A,DIP-4		
RBD1	0402-001258	DIODE-BRIDGE:GBU606,600V,6A,SIP-4,BK		
OJACK	0603-001051	OPTIC TRANSMITTER:5V,6Mbps,5m,-15dBm,660		
FIC1	1201-000191	IC-OP AMP:4558,DIP,8P,300MIL,DUAL,20V/mV		
DIC1	1201-001819	IC-PREAMP:--,44P,--,PLASTIC,18V,625M		
RIC1	1203-001653	IC-VOLTAGE REGULATOR:4959,MULTIWATT,15P,		
FIC2	1204-001776	IC-SOUND PROCESSOR:TDA7442D,SOP,28P,295M		
RR9	2003-000455	R-METAL OXIDE(S):100ohm,5%,2W,AA,TP4x12		
RR3	2003-000701	R-METAL OXIDE(S):470ohm,5%,2W,AA,TP4x12		
RR36	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP6.5x17mm		
RR35	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP6.5x17mm		
RR34	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP6.5x17mm		
RC19	2201-000546	C-CERAMIC,DISC:4.7nF,20%,400V,Y5U,BK,16x		
RC18	2201-000546	C-CERAMIC,DISC:4.7nF,20%,400V,Y5U,BK,16x		
RC5	2401-000230	C-AL:100uF,20%,100V,GP,TP12.5x20mm		
RC4	2401-001928	C-AL:2200uF,20%,35V,GP,BK,16x31mm,7		
RC3	2401-001928	C-AL:2200uF,20%,35V,GP,BK,16x31mm,7		
RC2	2401-002592	C-AL:2200uF,20%,50V,GP,TP18x35,5,7		
RC1	2401-002592	C-AL:2200uF,20%,50V,GP,TP18x35,5,7		
OLPF	2901-001139	FILTER-EMI ON BOARD:50V,5A,-,390PF,7X2,		
RF1	3601-000170	FUSE-CARTRIDGE:250V,1.6A,TIME-LAG,GLASS,		
FCW4	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH		
FCW2	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH		
FCW1	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH		
TCW1	3708-001051	CONNECTOR-FPC/FFC/PIC,13P,1.25mm,ANGLE,S		
RCW2	3711-000190	CONNECTOR-HEADER:1WALL,2P1R,7.92mm,STRA		
DCW2	3711-000907	CONNECTOR-HEADER:BOX,3P1R,2mm,STRAIGHT,		
ACW1	3711-001011	CONNECTOR-HEADER:BOX,5P1R,2.5mm,STRAIGH		
CCW1	3711-001137	CONNECTOR-HEADER:BOX,8P1R,2mm,STRAIGHT,		
RCW1	3711-001485	CONNECTOR-HEADER:NOWALL,3P1R,8MM,STRAIG		
DCW3	3711-003107	CONNECTOR-HEADER:BOX,3P1R,2.5mm,STRAIGH		
DCW1	3711-003111	CONNECTOR-HEADER:BOX,6P1R,2.5mm,STRAIGH		
RCW5	3711-003112	CONNECTOR-HEADER:BOX,8P1R,2.5mm,STRAIGH		
AJCK	3722-000377	JACK-PIN:4P/2C,3.5mm,SN,BLK,#16-22		
	3811-000131	WIRE-PVC CU,BCUWA,300V,80MM,7/0.16MM,		
	6003-000276	SCREW-TAPTITE:BH,+B,M3,L10,ZPC(YEL),SWC		
	6003-000276	SCREW-TAPTITE:BH,+B,M3,L10,ZPC(YEL),SWC		
OIC1	AH14-10004R	IC,M74HC04,SOP,TAPE 14P		
DL1	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,		
DL2	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,		
DL4	AH26-10003C	TRANS TRAP-COIL,PCHNS-5371EQJ,BIAS-TRAP,		
RL2	AH27-10001F	COIL-CHOKER:27uH,K,Q30,-,DR(6.5*7.5),-,		
RL1	AH27-10001F	COIL-CHOKER:27uH,K,Q30,-,DR(6.5*7.5),-,		
OCW1	AH39-000968	LEAD CONNECTOR ASSY:RXD-DV9,#1007,28,AWG		
KCWA	AH39-20008N	LEAD CONNECTOR ASSY:S264,5385,2P,200MM,1		
	AH39-50001K	WIRE HARNESS:RING,1007#24,140MM,BLK		
	AH61-40014A	SUPPORT-RIVET:-----		
	AH63-00278A	COVER-PCB;MAX-WL85,PVC 0.5T,-----,CLR,		
TD2	0401-000101	DIODE-SWITCHING:1N4148,100V,200mA,DO-35,		
TD1	0401-000101	DIODE-SWITCHING:1N4148,100V,200mA,DO-35,		
FD1	0401-000101	DIODE-SWITCHING:1N4148,100V,200mA,DO-35,		
DD1	0401-000101	DIODE-SWITCHING:1N4148,100V,200mA,DO-35,		
RD2	0402-000127	DIODE-RECTIFIER:1N4002,100V,1A,DO-41,TP		
RD13	0402-000127	DIODE-RECTIFIER:1N4002,100V,1A,DO-41,TP		
RD12	0402-000127	DIODE-RECTIFIER:1N4002,100V,1A,DO-41,TP		
RD1	0402-000127	DIODE-RECTIFIER:1N4002,100V,1A,DO-41,TP		
RZD1	0403-000354	DIODE-ZENER:UZ5,18.5,1V,8-5,4V,500mW,D		
FZD1	0403-000372	DIODE-ZENER:UZ9,18M,9,1V,8-9,4V,500mW,		
RZD5	0403-000380	DIODE-ZENER:UZP13B,13V,12-14,1V,1W,DO-		
RZD2	0403-000564	DIODE-ZENER:TZP16A,16V,15.3-17,1V,1W,DO-		
RZD3	0403-000570	DIODE-ZENER:UZP18B,18V,16.9-19,1V,1W,DO-		
RZD4	0403-001010	DIODE-ZENER:UZ5,68CC,5.6V,5.6A,5.88V,50		
DQ9	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,		
DQ8	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,		
DQ7	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,		
DQ6	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,		
RQ2	0501-000294	TR-SMALL SIGNAL,KSA708-Y,NPN,800mW,TO-92		
CQ2	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
CQ3	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
DQ4	0501-000369	TR-SMALL SIGNAL,KSC2331-Y,NPN,1000mW,TO-		
DQ1	0501-000398	TR-SMALL SIGNAL,KSC945,NPN,250mW,TO-92,T		
FQ1	0501-000398	TR-SMALL SIGNAL,KSC945,NPN,250mW,TO-92,T		
DQ11	0501-000407	TR-SMALL SIGNAL,KSD471A-Y,NPN,800mW,TO-9		
DQ10	0501-000407	TR-SMALL SIGNAL,KSD471A-Y,NPN,800mW,TO-9		
DQ3	0501-000610	TR-SMALL SIGNAL,KSA928A-Y,NPN,1W,TO-92,L		
RQ1	0501-000610	TR-SMALL SIGNAL,KSA928A-Y,NPN,1W,TO-92,L		
DQ5	0504-001003	TR-DIGITAL:KSR2003,PNP,300MW,22K/22K,TO-		
DQ40	0504-001003	TR-DIGITAL:KSR2003,PNP,300MW,22K/22K,TO-		
CQ1	0504-001003	TR-DIGITAL:KSR2003,PNP,300MW,22K/22K,TO-		
CR4	2001-000008	R-CARBON:15Kohm,5%,1/8W,AA,TP1.8x3.2mm		
CR7	2001-000008	R-CARBON:15Kohm,5%,1/8W,AA,TP1.8x3.2mm		
RR8	2001-000016	R-CARBON(S):10HM,5%,1/2W,AA,TP2.4x6.4MM		
FR11	2001-000027	R-CARBON:100ohm,5%,1/4W,AA,TP2.4x6.4mm		
RR10	2001-000038	R-CARBON:390ohm,5%,1/4W,AA,TP2.4x6.4mm		
RR11	2001-000050	R-CARBON:2.7Kohm,5%,1/4W,AA,TP2.4x6.4mm		
DR18	2001-000111	R-CARBON:150ohm,5%,1/4W,AA,TP2.4x6.4mm		
FR24	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP1.8x3.2m		
FR25	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP1.8x3.2m		

Location no	Code no.	Description	Specification	Remarks	Location no	Code no.	Description	Specification	Remarks
TR5	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC19	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,YST,TP,5x3.5		
TR6	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC18	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,YST,TP,5x3.5		
DR1	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			FC27	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DR17	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			FC28	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DR2	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			FC29	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DR4	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			FC26	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
TR1	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC33	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DR24	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC17	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DR3	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm			OC3	2201-000381	C-CERAMIC,DISC:22nF,+80%,50V,-,8x4mm,-		
DR9	2001-000302	R-CARBON:10ohm,5%,1/8W,AA,TP,1.8x3.2mm			OC1	2201-000487	C-CERAMIC,DISC:33pF,5%,50V,SL,TP,5x3.5mm		
DR11	2001-000302	R-CARBON:10ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC1	2201-000674	C-CERAMIC,DISC:0.82nF,10%,50V,Y5P,BK,5x3		
FR21	2001-000319	R-CARBON:120Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC29	2201-000674	C-CERAMIC,DISC:0.82nF,10%,50V,Y5P,BK,5x3		
FR20	2001-000319	R-CARBON:120Kohm,5%,1/8W,AA,TP,1.8x3.2m			TC20	2202-000796	C-CERAMIC,MLC-AXIAL,1nF,10%,50V,Y5P,TP,3		
FR1	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC14	2301-000361	C-FILM,PEF:1.2nF,10%,50V,TP,-,5mm		
FR8	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC10	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
TR12	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC25	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
TR9	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC26	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
CR5	2001-000411	R-CARBON:18Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC7	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
CR2	2001-000411	R-CARBON:18Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC13	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
RR4	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC15	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FR22	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC16	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DR104	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC17	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DR103	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC32	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DR10	2001-000435	R-CARBON:1Mohm,5%,1/8W,AA,TP,1.8x3.2mm			DC11	2301-000379	C-FILM,PEF:10nF,10%,50V,TP,6x12x3.5mm,-		
DR13	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC24	2301-000379	C-FILM,PEF:10nF,10%,50V,TP,6x12x3.5mm,-		
DR6	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC31	2301-000385	C-FILM,PEF:12nF,10%,50V,TP,7x12x3.5mm,-		
FR16	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC37	2301-000385	C-FILM,PEF:12nF,10%,50V,TP,7x12x3.5mm,-		
FR17	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC16	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DR5	2001-000522	R-CARBON:22Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC15	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DR14	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC14	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DR7	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC13	2301-000407	C-FILM,PEF:2.7nF,10%,50V,TP,5.5x12x3mm,-		
RR12	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm			CC2	2301-000449	C-FILM,PEF:47nF,10%,50V,TP,9.5x12.5x5mm,		
TR8	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC11	2301-000454	C-FILM,PEF:5.6nF,10%,50V,TP,6x12x3.3.5mm		
CR1	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC12	2301-000454	C-FILM,PEF:5.6nF,10%,50V,TP,6x12x3.3.5mm		
DR20	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			OC2	2401-000240	C-AL:100uF,20%,10V,GP,TP,6x11.5,3.5m		
FR2	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			RC6	2401-000357	C-AL:100uF,20%,50V,GP,-,8x11.5,3.5m		
FR4	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC30	2401-000419	C-AL:10uF,20%,16V,GP,-,4x7.5		
FR5	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			CC5	2401-000419	C-AL:10uF,20%,16V,GP,-,4x7.5		
FR7	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m			RC9	2401-000438	C-AL:10uF,20%,25V,GP,-,5x11.2mm		
RR6	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC2	2401-000778	C-AL:220uF,20%,10V,GP,-,6.3x11.2.5m		
DR28	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m			RC11	2401-000795	C-AL:220uF,20%,16V,GP,TP,8x12mm,5mm		
DR21	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC10	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
FR13	2001-000645	R-CARBON:330Kohm,5%,1/8W,AA,TP,1.8x3.2m			CC1	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
FR12	2001-000645	R-CARBON:330Kohm,5%,1/8W,AA,TP,1.8x3.2m			RC10	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
RR1A	2001-000660	R-CARBON:33Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC1	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DR22	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC34	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DR25	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC36	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DR29	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC35	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
TR7	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC5	2401-001080	C-AL:330nF,20%,50V,GP,-,5x11.2mm		
TR11	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC4	2401-001102	C-AL:330uF,20%,16V,GP,TP,8x11.5mm,5		
RR14	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC4	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		
RR5	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC25	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		
TR10	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC2	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		
DR102	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC24	2401-001324	C-AL:470nF,20%,50V,GP,BK,3x5.1mm		
DR15	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			CC4	2401-001895	C-AL:100uF,20%,16V,GP,TP,6.3x11.2.5		
DR16	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m			CC3	2401-001895	C-AL:100uF,20%,16V,GP,TP,6.3x11.2.5		
FR23	2001-000773	R-CARBON:470Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC31	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
CR6	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC8	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
DR19	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC9	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FR14	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			RC7	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FR15	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			DC20	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FR3	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC22	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FR6	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC23	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
CR3	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm			FC30	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
DR110	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC4	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
DR101	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC33	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FR10	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC2	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FR9	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m			RC8	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
DR37	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC32	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DR36	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC21	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DR35	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC12	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DR12	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			DC9	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR27	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC18	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR34	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC19	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
RR7	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m			FC20	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR33	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm			FC21	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR32	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC27	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR31	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC28	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR30	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm			DC34	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR8	2001-000977	R-CARBON:8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m			DC6	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DR26	2001-000977	R-CARBON:8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m			DC8	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
RR13	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP,2.4x6.4mm			CL2	2701-000178	INDUCTOR-AXIAL:33uH,10%,3x7mm		
DR23	2001-001096	R-CARBON(S):2.2ohm,5%,1/2W,AA,TP,2.4x6.4m			DL3	2701-000298	INDUCTOR-AXIAL:470uH,10%,4.2x9.8mm		
RR1	2001-001153	R-CARBON(S):47ohm,5%,1/2W,AA,TP,2.4x6.4m			CL1	2701-000298	INDUCTOR-AXIAL:470uH,10%,4.2x9.8mm		
RR2	2001-001153	R-CARBON(S):47ohm,5%,1/2W,AA,TP,2.4x6.4m			RF1	3602-000147	FUSE-CLIP:250V,7.5A,30mohm		
DSR2	2103-000248	VR-SEMI:200Kohm,30%,1/10W,TOP							
DSR1	2103-000248	VR-SEMI:200Kohm,30%,1/10W,TOP							
FC3	2201-000146	C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5							
FC6	2201-000146	C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5							
RC26	2201-000161	C-CERAMIC,DISC:10nF,+80-20%,500V,Y5V,TP							
RC25	2201-000161	C-CERAMIC,DISC:10nF,+80-20%,500V,Y5V,TP							
DC23	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,YST,TP,5x3.5							
DC22	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,YST,TP,5x3.5							

Location no	Code no.	Description	Specification	Remarks
AR402	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12		
AC2L	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC2R	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC301	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC302	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC20	2401-000871	C-AL;220uF,20%,50V,GP,-,10x16mm,5mm		
ARL1	3501-001197	RELAY-MINIATURE;12VDC,0.54W,44.4mA,1Form		
ACW1	3708-000181	CONNECTOR-FPC/FFC/PIC;16P,1.25mm,STRAIGH		
KCWB	3711-000820	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,STRAIGH		
SPK1	3716-001132	TERMINAL-BLOCK;SOLDER,4P,-,-,-		
	6003-000278	SCREW-TAPTITE;BH,+B,M3,L14,ZPC(YEL),SWC		
	6003-000283	SCREW-TAPTITE;BH,+B,M3,L8,ZPC(YEL),SM20		
AL3	AH27-90001A	COIL-SPRING;-;2.2UH,-,-,-,SPRING,-,-,-,-		
AL1L	AH27-90001A	COIL-SPRING;-;2.2UH,-,-,-,SPRING,-,-,-,-		
AL1R	AH27-90001A	COIL-SPRING;-;2.2UH,-,-,-,SPRING,-,-,-,-		
AL2	AH27-90001A	COIL-SPRING;-;2.2UH,-,-,-,SPRING,-,-,-,-		
ACW2	AH39-00249A	LEAD CONNECTOR ASSY;MX-K5,#1007,22AWG,UL		
JMP1	AH39-50001L	WIRE HARNESS;RING,1007#24,200MM,BLK		
	AH61-00973A	BRACKET-H/SINK,R;MAX-WB650,SECC T1.0,-,-		
	AH61-00977A	BRACKET-H/SINK,R;MAX-WB650,SECC T1.0,-,-		
	AH62-00063B	HEAT SINK;-;M;MAX-B550,AL,EXTR,-,-,-,-,-		
AD5	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP		
AQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,		
AQ10	0501-000303	TR-SMALL SIGNAL;KSA733,PNP,250mW,TO-92,T		
AQ7R	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-9		
AQ7L	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-9		
AQ2L	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9		
AQ2R	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9		
AQ5	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9		
AQ7	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9		
AQ8	0501-000610	TR-SMALL SIGNAL;KSA928A-Y;PNP,1W,TO-92L,		
AQ1A	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-		
AQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-		
AR6L	2001-000017	R-CARBON;4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR6R	2001-000017	R-CARBON;4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR77	2001-000065	R-CARBON;10Kohm,5%,1/4W,AA,TP,2.4x6.4mm		
AJR9	2001-000073	R-CARBON;33Kohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR2R	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR2L	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR16R	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR16L	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR26	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR1R	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR1L	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR21	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR35	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR36	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR45L	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR405R	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR9	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR7L	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR7R	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR31	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR25	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR20	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR32	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR8R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR8L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR33	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR23	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR29	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR309	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR310	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR30	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR403	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR404	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR78	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR13	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR15R	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AR15L	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AC1R	2201-000368	C-CERAMIC,DISC,220pF,10%,50V,SL,TP,6.5x3		
AC58R	2201-000368	C-CERAMIC,DISC,220pF,10%,50V,SL,TP,6.5x3		
AC1L	2201-000368	C-CERAMIC,DISC,220pF,10%,50V,SL,TP,6.5x3		
ACE2	2201-000381	C-CERAMIC,DISC,22nF,+80%,50V,-,8x4mm,-		
AC56R	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC56L	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC17L	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC17R	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC16R	2201-000783	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,		
AC16L	2201-000783	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,		
AC5R	2201-000838	C-CERAMIC,DISC,3pF,0.3pF,50V,CH,TP,5x3.5		
AC5L	2201-000838	C-CERAMIC,DISC,3pF,0.3pF,50V,CH,TP,5x3.5		
AC15L	2301-000375	C-FILM,PEF,100nF,5%,50V,TP,11x12.5x6.5,7		
AC15R	2301-000375	C-FILM,PEF,100nF,5%,50V,TP,11x12.5x6.5,7		
AC18R	2301-000404	C-FILM,PEF,2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC18L	2301-000404	C-FILM,PEF,2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC302	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		

Location no	Code no.	Description	Specification	Remarks
AC301	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC2R	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC2L	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC6L	2401-000385	C-AL;10uF,20%,100V,GP,TP,6.3x11.5		
AC3R	2401-000385	C-AL;10uF,20%,100V,GP,TP,6.3x11.5		
AC4L	2401-001154	C-AL;33uF,20%,10V,GP,-,5x11.2mm		
AC4R	2401-001154	C-AL;33uF,20%,10V,GP,-,5x11.2mm		
AC23	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
AC22	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
AC21	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
	AH41-00433B	PCB;MAX-B550/570VB555,-,-,-,-,247		

AH92-01353G ASSY PCB;MAX-B570,CE,RDS,ASSY-MAIN MAX-B570

RBD2	0402-000450	DIODE-BRIDGE;PBL403,200V,4.0A,DIP-4
RBD1	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK
OJACK	0603-001051	OPTIC TRANSMITTER;5V,6Mbs,5m,-15dBm,660
FIC1	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV
DC1	1201-001819	IC-PREAMP;-,-,44P,-,-,PLASTIC,18V,625M
RIC1	1203-001653	IC-VOLTAGE REGULATOR;4959,MULTIWATT,15P,
FIC2	1204-001776	IC-SOUND PROCESSOR;TDA7442D,SOP,28P,295M
RR9	2003-000455	R-METAL OXIDE(S);100ohm,5%,2W,AA,TP,4x12
RR3	2003-000701	R-METAL OXIDE(S);470ohm,5%,2W,AA,TP,4x12
RR36	2008-000138	R-FUSIBLE;1ohm,5%,2W,AA,TP,6.5x17mm
RR35	2008-000138	R-FUSIBLE;1ohm,5%,2W,AA,TP,6.5x17mm
RR34	2008-000138	R-FUSIBLE;1ohm,5%,2W,AA,TP,6.5x17mm
RC19	2201-000546	C-CERAMIC,DISC,4.7nF,20%,400V,Y5U,BK,16x
RC18	2201-000546	C-CERAMIC,DISC,4.7nF,20%,400V,Y5U,BK,16x
RC5	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm
RC4	2401-001928	C-AL;220uF,20%,35V,GP,BK,16x11mm,7
RC3	2401-001928	C-AL;220uF,20%,35V,GP,BK,16x11mm,7
RC2	2401-003381	C-AL;330uF,20%,63V,GP,BK,22x40,10
RC1	2401-003381	C-AL;330uF,20%,63V,GP,BK,22x40,10
OLPF	2901-001139	FILTER-EMI ON BOARD;50V,-5A,-,390PF,7X2,
RF1	3601-000216	FUSE-CARTRIDGE;250V,2.5A,TIME-LAG,GLASS,
FCW4	3708-000181	CONNECTOR-FPC/FFC/PIC;16P,1.25mm,STRAIGH
FCW2	3708-000181	CONNECTOR-FPC/FFC/PIC;16P,1.25mm,STRAIGH
FCW1	3708-000181	CONNECTOR-FPC/FFC/PIC;16P,1.25mm,STRAIGH
TCW1	3708-001051	CONNECTOR-FPC/FFC/PIC;13P,1.25mm,ANGLE,S
RCW2	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.2mm,STRA
DCW2	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,
ACW1	3711-001011	CONNECTOR-HEADER;BOX,5P,1R,2.5mm,STRAIGH
CCW1	3711-001137	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,
RCW1	3711-001485	CONNECTOR-HEADER;NOWALL,3P,1R,8MM,STRAIG
DCW3	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGH
DCW1	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGH
RCW5	3711-003112	CONNECTOR-HEADER;BOX,8P,1R,2.5mm,STRAIGH
AJCK	3722-000377	JACK-PIN;4P/2C,3.5mm,SN,BLK,#16-22
	3811-000131	WIRE-PVC CU;BCWA,300V,80MM,7/0.16MM,#
	6003-000276	SCREW-TAPTITE;BH,+B,M3,L10,ZPC(YEL),SWC
	6003-000276	SCREW-TAPTITE;BH,+B,M3,L10,ZPC(YEL),SWC
OIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P
DL1	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,
DL2	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,
DL4	AH26-10003C	TRANS TRAP-COIL;PCHNS-5371EQJ,BIAS-TRAP,
RL2	AH27-10001F	COIL-CHOKE;27uH,K,Q30,-,-,DR(6.5*7.5)-,
RL1	AH27-10001F	COIL-CHOKE;27uH,K,Q30,-,-,DR(6.5*7.5)-,
OCW1	AH39-000968	LEAD CONNECTOR ASSY;RXD-DV9,#1007,28,AWG
KCWA	AH39-20008N	LEAD CONNECTOR ASSY;S264,5395,2P,200MM,1
	AH39-50001K	WIRE HARNESS;RING,1007#24,140MM,BLK
	AH61-40014A	SUPPORT-RIVET;-,-,-,-,-,-,-,-,-,-,-,-,-,-
	AH63-00278A	COVER-PCB;MAX-WL85,PVC 0.5T,-,-,-,-,-,CLR,
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,
FD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,
RD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
RZD1	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,D
FZD1	0403-000372	DIODE-ZENER;UZ9.1BM,9.1V,8.7-9.4V,500mW,D
RZD5	0403-000380	DIODE-ZENER;UZP13B,13V,12.4-14.1V,1W,DO-
RZD2	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-
RZD3	0403-000570	DIODE-ZENER;UZP18B,18V,16.9-19.1V,1W,DO-
RZD4	0403-001010	DIODE-ZENER;UZ5.6BCC,5.6V,5.64-5.88V,500
DQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,
DQ8	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,
DQ7	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,
DQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,
QQ2	0501-000294	TR-SMALL SIGNAL;KSA708-Y;PNP,800mW,TO-92
RQ2	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-9
CQ3	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-9
DQ4	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1000mW,TO-
DQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T
FQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,T
DQ11	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9
DQ10	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-9
DQ3	0501-000610	TR-SMALL SIGNAL;KSA928A-Y;PNP,1W,TO-92L
DQ5	0501-000610	TR-SMALL SIGNAL;KSA928A-Y;PNP,1W,TO-92L
RQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-
DQ40	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-
CQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-
FR8	2001-000008	R-CARBON;15kohm,5%,1/8W,AA,TP,1.8x3.2mm

Location no	Code no.	Description	Specification	Remarks
FR1	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR7	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR4	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR8	2001-000016	R-CARBON(S);10Kohm,5%,1/2W,AA,TP,2.4x6.4mm		
FR11	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm		
RR10	2001-000038	R-CARBON;390ohm,5%,1/4W,AA,TP,2.4x6.4mm		
RR11	2001-000050	R-CARBON;2.7Kohm,5%,1/4W,AA,TP,2.4x6.4mm		
DR18	2001-000111	R-CARBON;150ohm,5%,1/4W,AA,TP,2.4x6.4mm		
FR25	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR24	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR2	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR4	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR4	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR2	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR17	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR6	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR3	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR24	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR9	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR11	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR20	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR21	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR1	2001-000331	R-CARBON;12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR8	2001-000331	R-CARBON;12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR12	2001-000331	R-CARBON;12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR9	2001-000331	R-CARBON;12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR5	2001-000411	R-CARBON;18Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR2	2001-000411	R-CARBON;18Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR4	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR22	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR104	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR103	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR10	2001-000435	R-CARBON;1Mohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR17	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR16	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR6	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR13	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
TR8	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR12	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR7	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR14	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR1	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR20	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR2	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR4	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR5	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR7	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR6	2001-000613	R-CARBON;3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR28	2001-000613	R-CARBON;3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR21	2001-000613	R-CARBON;3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR13	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR12	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR1A	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR22	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR25	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR29	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR5	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR14	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TR7	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TR11	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TR10	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR102	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR15	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR16	2001-000734	R-CARBON;4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR23	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m		
CR3	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR6	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR19	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR14	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR15	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR3	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR6	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR10	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR9	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR101	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR110	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR35	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR34	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR27	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR12	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR7	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR37	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR36	2001-000890	R-CARBON;6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR33	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR32	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR31	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR30	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR8	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m		

Location no	Code no.	Description	Specification	Remarks
DR26	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m		
RR13	2001-001004	R-CARBON;82ohm,5%,1/4W,AA,TP,2.4x6.4mm		
DR23	2001-001096	R-CARBON(S);2.2ohm,5%,1/2W,AA,TP,2.4x6.4		
RR2	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4m		
RR1	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4m		
DSR2	2103-000248	VR-SEMI;200Kohm,30%,1/10W,TOP		
DSR1	2103-000248	VR-SEMI;200Kohm,30%,1/10W,TOP		
FC3	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,		
FC6	2201-000146	C-CERAMIC,DISC;0.1nF,5%,50V,SL,TP,5x3.5,		
RC26	2201-000161	C-CERAMIC,DISC;10nF,+80-20%,500V,Y5V,TP,		
RC25	2201-000161	C-CERAMIC,DISC;10nF,+80-20%,500V,Y5V,TP,		
DC23	2201-000300	C-CERAMIC,DISC;1nF,20%,50V,Y5T,TP,5x3.5		
DC22	2201-000300	C-CERAMIC,DISC;1nF,20%,50V,Y5T,TP,5x3.5		
DC19	2201-000300	C-CERAMIC,DISC;1nF,20%,50V,Y5T,TP,5x3.5		
DC18	2201-000300	C-CERAMIC,DISC;1nF,20%,50V,Y5T,TP,5x3.5		
FC26	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
FC27	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
FC28	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
FC29	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
DC33	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
DC17	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
OC3	2201-000381	C-CERAMIC,DISC;22nF,+80%,50V,-,8x4mm,-		
OC1	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3.5m		
DC1	2201-000674	C-CERAMIC,DISC;0.82nF,10%,50V,Y5P,BK,5x3		
DC29	2201-000674	C-CERAMIC,DISC;0.82nF,10%,50V,Y5P,BK,5x3		
TC20	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3		
FC14	2301-000361	C-FILM,PEF;1.2nF,10%,50V,TP,-5mm		
DC10	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
DC25	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
DC26	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
DC7	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
FC13	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
FC15	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
FC16	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
FC17	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
FC32	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
DC11	2301-000379	C-FILM,PEF;10nF,10%,50V,TP,6x12x3.5mm,-		
DC24	2301-000379	C-FILM,PEF;10nF,10%,50V,TP,6x12x3.5mm,-		
DC31	2301-000385	C-FILM,PEF;12nF,10%,50V,TP,7x12x3.5mm,-		
DC37	2301-000385	C-FILM,PEF;12nF,10%,50V,TP,7x12x3.5mm,-		
DC16	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC15	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC14	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC13	2301-000407	C-FILM,PEF;2.7nF,10%,50V,TP,5.5x12x3mm,-		
CC2	2301-000449	C-FILM,PEF;47nF,10%,50V,TP,9.5x12.5x5mm,-		
FC11	2301-000454	C-FILM,PEF;5.6nF,10%,50V,TP,6x12x3.5mm		
FC12	2301-000454	C-FILM,PEF;5.6nF,10%,50V,TP,6x12x3.5mm		
OC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11.5		
RC6	2401-000357	C-AL;100uF,20%,50V,GP,-8x11.5,3.5m		
DC30	2401-000419	C-AL;10uF,20%,16V,GP,-4x7.5		
CC5	2401-000419	C-AL;10uF,20%,16V,GP,-4x7.5		
RC9	2401-000438	C-AL;10uF,20%,25V,GP,-5x11.2mm		
DC2	2401-000778	C-AL;220uF,20%,10V,GP,-6.3x11.2,5m		
RC11	2401-000795	C-AL;220uF,20%,16V,GP,TP,8x12mm,5mm		
RC10	2401-000907	C-AL;22uF,20%,16V,GP,TP,5x11mm,5mm		
FC10	2401-000907	C-AL;22uF,20%,16V,GP,TP,5x11mm,5mm		
CC1	2401-000907	C-AL;22uF,20%,16V,GP,TP,5x11mm,5mm		
FC34	2401-001022	C-AL;3.3uF,20%,50V,GP,TP,5x11.5		
FC1	2401-001022	C-AL;3.3uF,20%,50V,GP,TP,5x11.5		
DC36	2401-001022	C-AL;3.3uF,20%,50V,GP,TP,5x11.5		
DC35	2401-001022	C-AL;3.3uF,20%,50V,GP,TP,5x11.5		
DC5	2401-001080	C-AL;330nF,20%,50V,GP,-5x11.2mm		
DC4	2401-001102	C-AL;330uF,20%,16V,GP,TP,8x11.5mm,5		
FC25	2401-001238	C-AL;4.7uF,20%,25V,GP,BK,3x5,1mm		
FC24	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm		
CC4	2401-001895	C-AL;100uF,20%,16V,GP,TP,6.3x11.2,5		
CC3	2401-001895	C-AL;100uF,20%,16V,GP,TP,6.3x11.2,5		
FC31	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
FC8	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
FC9	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
RC7	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
DC20	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
FC22	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
FC23	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
FC30	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
RC8	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FC4	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FC33	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FC2	2401-001954	C-AL;4.7uF,20%,50V,GP,TP,5x11mm,5mm		
DC32	2401-001975	C-AL;47uF,20%,16V,GP,TP,5x11mm,5mm		
DC21	2401-001975	C-AL;47uF,20%,16V,GP,TP,5x11mm,5mm		
DC12	2401-001975	C-AL;47uF,20%,16V,GP,TP,5x11mm,5mm		
DC8	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC9	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC18	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC19	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC20	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC21	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC27	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC28	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC34	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC35	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC36	2401-002180	C-AL;2.2uF,20%,50V,GP,TP,5x11mm,5mm		

Location no	Code no.	Description	Specification	Remarks
DC6	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
CL2	2701-000178	INDUCTOR-AXIAL,33uH,10%,3x7mm		
CL1	2701-000298	INDUCTOR-AXIAL,470uH,10%,4.2x9.8mm		
DL3	2701-000298	INDUCTOR-AXIAL,470uH,10%,4.2x9.8mm		
RF1	3602-000147	FUSE-CLIP;250V,7.5A,30mohm		
AH92-01354E ASSY PCB;MAX-B570,CE,ASSY-AMP PCB MAX-B570				
AIC1	1201-001599	IC-POWER AMP;042-090,SIP,15P,-,DUAL,30dB		
AR4L	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,		
AR4R	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,		
AR5L	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,		
AR5R	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,		
AR402	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12		
AR401	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12		
AC2L	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC2R	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC301	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC302	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC20	2401-000871	C-AL:220uF,20%,50V,GP,-,10x16mm,5mm		
ARL1	3501-001197	RELAY-MINIATURE,12VDC,0.54W,44.4mA,1Form		
ACW1	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH		
KCWB	3711-000820	CONNECTOR-HEADER,BOX,2P,1R,2.5mm,STRAIGH		
SPK1	3716-001132	TERMINAL-BLOCK,SOLDER,4P,-,-,-		
AL2	AH27-90001A	COIL-SPRING;-2.2UH,-,-,-,SPRING,-,-,-,-		
AL3	AH27-90001A	COIL-SPRING;-2.2UH,-,-,-,SPRING,-,-,-,-		
AL1R	AH27-90001A	COIL-SPRING;-2.2UH,-,-,-,SPRING,-,-,-,-		
AL1L	AH27-90001A	COIL-SPRING;-2.2UH,-,-,-,SPRING,-,-,-,-		
ACW2	AH39-00249A	LEAD CONNECTOR ASSY;MX-K5,#1007,22AWG,UL		
JMP1	AH39-50001L	WIRE HARNESS,RING,1007#24,200MM,BLK		
	AH61-00973A	BRACKET-H/SINK,L,MAX-WB650,SECC T1.0,-,-		
	AH61-00977A	BRACKET-H/SINK,R,MAX-WB650,SECC T1.0,-,-		
AD5	0402-000127	DIODE-RECTIFIER,1N4002,100V,1A,DO-41,TP		
AQ6	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,		
AQ10	0501-000303	TR-SMALL SIGNAL,KS4733,PNP,250mW,TO-92,T		
AQ7L	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
AQ7R	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
AQ2L	0501-000407	TR-SMALL SIGNAL,KS471A-Y,NPN,800mW,TO-9		
AQ2R	0501-000407	TR-SMALL SIGNAL,KS471A-Y,NPN,800mW,TO-9		
AQ5	0501-000407	TR-SMALL SIGNAL,KS471A-Y,NPN,800mW,TO-9		
AQ7	0501-000407	TR-SMALL SIGNAL,KS471A-Y,NPN,800mW,TO-9		
AQ8	0501-000610	TR-SMALL SIGNAL,KS4928A-Y,PNP,1W,TO-92L,		
AQ1A	0504-000118	TR-DIGITAL,KSR1003,NPN,300mW,22K/22K,TO-		
AQ1	0504-001003	TR-DIGITAL,KSR2003,PNP,300mW,22K/22K,TO-		
AR6L	2001-000017	R-CARBON;4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR6R	2001-000017	R-CARBON;4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR77	2001-000065	R-CARBON;10kohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR9R	2001-000073	R-CARBON;33Kohm,5%,1/4W,AA,TP,2.4x6.4mm		
AR2R	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR2L	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR16R	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR16L	2001-000221	R-CARBON;1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR26	2001-000273	R-CARBON;100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR1R	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR1L	2001-000290	R-CARBON;10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR21	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR35	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR36	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR405L	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR405R	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR9	2001-000429	R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR7L	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR7R	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR31	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR25	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR33	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR32	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR20	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR8R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR8L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR23	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR29	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR310	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR309	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR30	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR404	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR403	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR78	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR13	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR15R	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AR15L	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AC1L	2201-000368	C-CERAMIC,DISC,220pF,10%,50V,SL,TP,6.5x3		
AC1R	2201-000368	C-CERAMIC,DISC,220pF,10%,50V,SL,TP,6.5x3		
ACE2	2201-000381	C-CERAMIC,DISC,22nF,+80%,50V,-,8x4mm,-		
AC17L	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC17R	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC56R	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		
AC56L	2201-000532	C-CERAMIC,DISC,4.7nF,10%,50V,Y5P,TP,8x3.		

Location no	Code no.	Description	Specification	Remarks
AC58R	2201-000642	C-CERAMIC,DISC,0.68nF,10%,50V,Y5P,TP,5x3		
AC16R	2201-000783	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,		
AC16L	2201-000783	C-CERAMIC,DISC,100nF,+80-20%,50V,Y5V,TP,		
AC5L	2201-000838	C-CERAMIC,DISC,3pF,0.3pF,50V,CH,TP,5x3.5		
AC5R	2201-000838	C-CERAMIC,DISC,3pF,0.3pF,50V,CH,TP,5x3.5		
AC15R	2301-000375	C-FILM,PEF,100nF,5%,50V,TP,11x12.5x6.5,7		
AC15L	2301-000375	C-FILM,PEF,100nF,5%,50V,TP,11x12.5x6.5,7		
AC18R	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC18L	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC302	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC301	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC2R	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC2L	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm		
AC6L	2401-000385	C-AL:10uF,20%,100V,GP,TP,6.3x11.5		
AC3R	2401-000385	C-AL:10uF,20%,100V,GP,TP,6.3x11.5		
AC4L	2401-001154	C-AL:33uF,20%,10V,GP,-,5x11.2mm		
AC4R	2401-001154	C-AL:33uF,20%,10V,GP,-,5x11.2mm		
AC23	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
AC22	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
AC21	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		

**** MAXZB550 PARTS LIST ****

AH26-00164A	TRANS POWER;-MAX-B550,230V,50HZ.
AH26-00164B	TRANS POWER;-MAX-B550,127V,60HZ
AH26-00164C	TRANS POWER;-MAX-B550,110V,220V/60/50HZ
AH26-00164D	TRANS POWER;-MAX-B550,230/264V,50HZ
AH38-10001A	WIRE-LEAD;1007#22,1500MM
AH39-00257A	POWER CORD;Z-88,-,CP2,250V,2.5A,1830MM/1
AH40-00008A	TUNER-PACK ASSY;KST-MB114LS1-30,FMMMWLW
AH42-20001P	ANT LOOP;-K,KS971120-01,18.5UH##10%-
AH59-00134K	REMOCON-ASSY;MAX-B550,SAMSUNG,-,-,27KEY,

AH59-00164B DECK-ASS'Y;-MAX-ZL45,-,-,-,-,-

AH92-00922C	ASSY PCB-CD,MP3;G3HI-3CD,MP3,3.5S
WIC401	1003-001162 IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,D
WIC402	1003-001162 IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,D
X201	2802-000211 RESONATOR-CERAMIC;16.93MHz,0.5%,TP,10.0x
CW103	3708-001131 CONNECTOR-FPC/FFC/PIC;5P,1.25mm,STRAIGHT
CW101	3708-001252 CONNECTOR-FPC/FFC/PIC;16P,1mm,STRAIGHT-F
CW105	3708-001438 CONNECTOR-FPC/FFC/PIC;22P,1.25mm,ANGLE,S
CW107	3711-000906 CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN
CW104	3711-003379 CONNECTOR-HEADER;NOWALL,3P,1R,2.5mm,STRA
CW106	AH39-00060A LEAD CONNECTOR ASSY;-51015-08,51004-08,
CW102	AH39-20561P LEAD CONNECTOR ASSY;-5295,PHR,6P,150mm,
D301	0402-000151 DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,T
ZD301	0403-000344 DIODE-ZENER;UZ3.9B,3.9V,3.7-4.1V,500mW,D
ZD402	0403-000352 DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500mW,D
ZD401	0403-000361 DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,500
Q302	0501-000010 TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92,
Q101	0501-000314 TR-SMALL SIGNAL,KS4812,PNP,150mW,SOT-23,
Q301	0501-000610 TR-SMALL SIGNAL,KS4928A-Y,NPN,1W,TO-92L,
WIC201	0904-001524 IC-DSP;-SL9290,-,QFP,48P,472MIL,16.934
WIC301	1003-000179 IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE
WIC602	1105-001339 IC-DRAM;11L1644,4Mx48Bit,TSOP,24P,300MI
WIC101	1204-001799 IC-ASP;KB9226,LQFP,48P,393MIL,PLASTIC
WIC601	1204-001885 IC-DECODER;S5L9276,LQFP,64P,-,PLASTIC,3.
R117	2001-000331 R-CARBON;12Kohm,5%,1/8W,AA,TP,1.8x3.2mm
R810	2001-000362 R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm
R211	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
R803	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
R605	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
R212	2001-000429 R-CARBON;1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
R604	2001-000515 R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm
R302	2001-001006 R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm
R114	2007-000001 R-CHIP;68KOHM,5%,1/10W,DA,TP,2012
J11	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J7	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J5	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J4	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J3	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J2	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J14	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J13	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J10	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J9	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J8	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
J1	2007-000029 R-CHIP;0OHM,5%,1/10W,DA,TP,2012
R501L	2007-000282 R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
R501R	2007-000282 R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
R201	2007-000290 R-CHIP;100OHM,5%,1/10W,DA,TP,2012
R203	2007-000290 R-CHIP;100OHM,5%,1/10W,DA,TP,2012
R502L	2007-000290 R-CHIP;100OHM,5%,1/10W,DA,TP,2012
R502R	2007-000290 R-CHIP;100OHM,5%,1/10W,DA,TP,2012
R809	2007-000300 R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
R133	2007-000300 R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
R132	2007-000300 R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
R108	2007-000308 R-CHIP;10OHM,5%,1/10W,DA,TP,2012
R124	2007-000338 R-CHIP;120KOHM,5%,1/10W,DA,TP,2012

Location no	Code no.	Description	Specification	Remarks	Location no	Code no.	Description	Specification	Remarks
R125	2007-000338	R-CHIP:120KOHM,5%,1/10W,DA,TP,2012			C208	2203-000858	C-CERAMIC,CHIP:0.039nF,5%,50V,NP0,TP,201		
R110	2007-000409	R-CHIP:15KOHM,5%,1/10W,DA,TP,2012			C111	2203-000892	C-CERAMIC,CHIP:4.7nF,10%,50V,X7R,TP,2012		
R105	2007-000409	R-CHIP:15KOHM,5%,1/10W,DA,TP,2012			C112	2203-000892	C-CERAMIC,CHIP:4.7nF,10%,50V,X7R,TP,2012		
R121	2007-000409	R-CHIP:15KOHM,5%,1/10W,DA,TP,2012			C124A	2203-001064	C-CERAMIC,CHIP:56nF,10%,50V,NP0,TP,2012		
R113	2007-000444	R-CHIP:180KOHM,5%,1/10W,DA,TP,2012			C106	2203-001137	C-CERAMIC,CHIP:68nF,+80-20%,50V,Y5V,TP,2		
R208	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C122	2203-001137	C-CERAMIC,CHIP:68nF,+80-20%,50V,Y5V,TP,2		
R207	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C608	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201		
R206	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C605	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201		
R205	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C203	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201		
R204	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C502R	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012		
R812	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C502L	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012		
R603	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C117	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012		
R602	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C102	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012		
R601	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C104	2203-001551	C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012		
R213	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C103	2203-001551	C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012		
R209	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C202	2203-001619	C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201		
R801	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C201	2203-001619	C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201		
R811	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C215	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R806	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C217	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R805	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C302	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R804	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C303	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R802	2007-000468	R-CHIP:1KOHM,5%,1/10W,DA,TP,2012			C603	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R202	2007-000477	R-CHIP:1MOHM,5%,1/10W,DA,TP,2012			C101	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R118	2007-000477	R-CHIP:1MOHM,5%,1/10W,DA,TP,2012			C107	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R116	2007-000546	R-CHIP:20KOHM,5%,1/10W,DA,TP,2012			C108	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R210	2007-000572	R-CHIP:220KOHM,5%,1/10W,DA,TP,2012			C133	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
R128	2007-000653	R-CHIP:27KOHM,5%,1/10W,DA,TP,2012			C212	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
DR1	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012			C123	2401-000419	C-AL:10uF,20%,16V,GP,-,4x7.5		
DR2	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012			C801	2401-000795	C-AL:220uF,20%,16V,GP,TP,8x12mm,5mm		
R807	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012			C301	2401-001102	C-AL:330uF,20%,16V,GP,TP,8x11.5mm,5		
R808	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012			c114	2401-001625	C-AL:6.8uF,20%,50V,GP,TP,5x11.5		
R809	2007-000872	R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012			C501R	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
R123	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP,2012			C501L	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
R129	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP,2012			C135	2401-001968	C-AL:470nF,20%,50V,GP,TP,5x11mm,5mm		
R813	2007-000941	R-CHIP:47KOHM,5%,1/10W,DA,TP,2012			C120	2401-001968	C-AL:470nF,20%,50V,GP,TP,5x11mm,5mm		
R120	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012			WIC801	AC14-12001G	IC:KAT8L05,T,-		
R126	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012			CD-PC8	AH41-00282B	PCB—CD MAIN;G3HI-3CD;G3HI-3CD;CD MAIN,P		
R104	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012							
R103	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012							
R101	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012							
R102	2007-001039	R-CHIP:56KOHM,5%,1/10W,DA,TP,2012							
R115	2007-001177	R-CHIP:8.2KOHM,5%,1/10W,DA,TP,2012							
R112	2007-001195	R-CHIP:82KOHM,5%,1/10W,DA,TP,2012							
R105	2007-001208	R-CHIP:82KOHM,5%,1/10W,DA,TP,2012							
R106	2007-001208	R-CHIP:82KOHM,5%,1/10W,DA,TP,2012							
R119	2007-001208	R-CHIP:82KOHM,5%,1/10W,DA,TP,2012							
R127	2007-001208	R-CHIP:82KOHM,5%,1/10W,DA,TP,2012							
R107	2007-001216	R-CHIP:82OHM,5%,1/10W,DA,TP,2012							
R301	2008-000140	R-FUSIBLE:2.2ohm,5%,1/2W,AA,TP,3.5x9.4mm							
C806	2202-000243	C-CERAMIC,MLC-AXIAL:33pF,5%,50V,SL,TP,3.							
C805	2202-000243	C-CERAMIC,MLC-AXIAL:33pF,5%,50V,SL,TP,3.							
C804	2202-000243	C-CERAMIC,MLC-AXIAL:33pF,5%,50V,SL,TP,3.							
C603A	2202-000780	C-CERAMIC,MLC-AXIAL:100nF,+80-20%,50V,Y5							
C113	2202-000780	C-CERAMIC,MLC-AXIAL:100nF,+80-20%,50V,Y5							
C604	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C403	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C211	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C205	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C606	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C607	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C610	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C611	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C612	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C115	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C116	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C118	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C124	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C129	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C204	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C132	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C131	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C130	2203-000203	C-CERAMIC,CHIP:100nF,10%,16V,X7R,TP,2012							
C305	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C304	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C218	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C401	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C402	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C601	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C216	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C121	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C134	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C207	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C209	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C213	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C214	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C602	2203-000260	C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012							
C126	2203-000495	C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012							
C127	2203-000595	C-CERAMIC,CHIP:0.22nF,5%,50V,NP0,TP,2012							
C803	2203-000787	C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP,2012							
C105	2203-000802	C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012							
C119	2203-000802	C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012							
C128	2203-000802	C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012							
C125	2203-000840	C-CERAMIC,CHIP:0.39nF,5%,50V,NP0,TP,2012							
C208	2203-000858	C-CERAMIC,CHIP:0.039nF,5%,50V,NP0,TP,201							
C111	2203-000892	C-CERAMIC,CHIP:4.7nF,10%,50V,X7R,TP,2012							
C112	2203-000892	C-CERAMIC,CHIP:4.7nF,10%,50V,X7R,TP,2012							
C124A	2203-001064	C-CERAMIC,CHIP:56nF,10%,50V,NP0,TP,2012							
C106	2203-001137	C-CERAMIC,CHIP:68nF,+80-20%,50V,Y5V,TP,2							
C122	2203-001137	C-CERAMIC,CHIP:68nF,+80-20%,50V,Y5V,TP,2							
C608	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201							
C605	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201							
C203	2203-001223	C-CERAMIC,CHIP:0.82nF,10%,50V,X7R,TP,201							
C502R	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012							
C502L	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012							
C117	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012							
C102	2203-001537	C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012							
C104	2203-001551	C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012							
C103	2203-001551	C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012							
C202	2203-001619	C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201							
C201	2203-001619	C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201							
C215	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C217	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C302	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C303	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C603	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C101	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C107	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C108	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C133	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C212	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5							
C123									

Location no	Code no.	Description	Specification	Remarks
-------------	----------	-------------	---------------	---------

Location no	Code no.	Description	Specifiatio	Remarks
-------------	----------	-------------	-------------	---------

Location no	Code no.	Description	Specification	Remarks	Location no	Code no.	Description	Specification	Remarks
MC6	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm			RZD1	0403-000354	DIODE-ZENER,UZ5.1B,5.1V,4.8-5.4V,500mW,D		
UC11	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm			FZD1	0403-000372	DIODE-ZENER,UZ9.1B9.1V,8.7-9.4V,500mW,		
UL2	2701-000178	INDUCTOR-AXIAL,33uH,10%,3x7mm			RZD5	0403-000380	DIODE-ZENER,UZP13B,13V,12.4-14.1V,1W,DO-		
UL1	2701-000178	INDUCTOR-AXIAL,33uH,10%,3x7mm			RZD2	0403-000564	DIODE-ZENER,UZP16A,16V,15.3-17.1V,1W,DO-		
USW15	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RZD3	0403-000570	DIODE-ZENER,UZP18B,18V,16.9-19.1V,1W,DO-		
USW14	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RZD4	0403-001010	DIODE-ZENER,UZ5.6BCC,5.6V/5.64-5.88V,500		
USW13	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ9	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92		
USW12	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ8	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92		
USW11	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ7	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92		
USW10	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ6	0501-000010	TR-SMALL SIGNAL,KSC1008,NPN,800mW,TO-92		
USW1	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RQ2	0501-000294	TR-SMALL SIGNAL,KSAT08-Y,PNP,800mW,TO-92		
USW30	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			CQ3	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
USW3	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			CQ2	0501-000331	TR-SMALL SIGNAL,KSC1009-Y,NPN,800mW,TO-9		
USW29	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ4	0501-000369	TR-SMALL SIGNAL,KSC2331-Y,NPN,1000mW,TO-		
USW28	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			FQ1	0501-000398	TR-SMALL SIGNAL,KSC945,NPN,250mW,TO-92,T		
USW27	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ1	0501-000398	TR-SMALL SIGNAL,KSC945,NPN,250mW,TO-92,T		
USW4	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ11	0501-000407	TR-SMALL SIGNAL,KSD471A-Y,NPN,800mW,TO-9		
USW9	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ10	0501-000407	TR-SMALL SIGNAL,KSD471A-Y,NPN,800mW,TO-9		
USW8	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ3	0501-000610	TR-SMALL SIGNAL,KS4928A-Y,PNP,1W,TO-92L,		
USW7	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RQ1	0501-000610	TR-SMALL SIGNAL,KS4928A-Y,PNP,1W,TO-92L,		
USW6	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ5	0504-001003	TR-DIGITAL,KSR2003,PNP,300MW,22K/22K,TO-		
USW5	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DQ40	0504-001003	TR-DIGITAL,KSR2003,PNP,300MW,22K/22K,TO-		
USW20	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			CQ1	0504-001003	TR-DIGITAL,KSR2003,PNP,300MW,22K/22K,TO-		
USW2	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			CR4	2001-000008	R-CARBON:15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
USW19	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			CR7	2001-000008	R-CARBON:15Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
USW18	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RR8	2001-000016	R-CARBON(S):10HM,5%,1/2W,AA,TP,2.4x6.4MM		
USW17	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			FR11	2001-000027	R-CARBON:100ohm,5%,1/4W,AA,TP,2.4x6.4mm		
USW21	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RR10	2001-000038	R-CARBON:390ohm,5%,1/4W,AA,TP,2.4x6.4mm		
USW26	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			RR11	2001-000050	R-CARBON:2.7Kohm,5%,1/4W,AA,TP,2.4x6.4mm		
USW25	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			DR18	2001-000111	R-CARBON:150ohm,5%,1/4W,AA,TP,2.4x6.4mm		
USW24	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			FR24	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
USW23	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			FR25	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP,1.8x3.2m		
USW22	3404-000165	SWITCH-TACT,12V,50mA,1.60gf,6x6mm,SPST			TR2	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
	AH41-00432A	PCB,MAX-B550/570VB555,-,-,-,247			TR3	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
AH92-01353A ASSY PCB;MAX-B550,ASSY-MAIN					TR4	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RBD2	0402-000450	DIODE-BRIDGE,PBL403,200V,4.0A,DIP-4			TR5	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RBD1	0402-001258	DIODE-BRIDGE,GBU606,600V,6A,SIP-4,BK			TR6	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
OJACK	0603-001051	OPTIC TRANSMITTER,5V,60mAs,5m,-15dBm,660			DR1	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
FC1	1201-000191	IC-OP AMP;4558,DIP,8P,300MIL,DUAL,20V/mV			DR17	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DIC1	1201-001819	IC-PREAMP;-,-,44P;-,-,PLASTIC,18V,625M			DR2	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RIC1	1203-001653	IC-VOLTAGE REGULATOR,4959,MULTIWATT,15P,			DR4	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
FIC2	1204-001776	IC-SOUND PROCESSOR;TDA7442D,SOP,28P,295M			TR1	2001-000281	R-CARBON:100ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR9	2003-000455	R-METAL OXIDE(S):100ohm,5%,2W,AA,TP,4x12			DR3	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR3	2003-000701	R-METAL OXIDE(S):470ohm,5%,2W,AA,TP,4x12			DR24	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR36	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP,6.5x17mm			DR11	2001-000302	R-CARBON:10ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR35	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP,6.5x17mm			DR9	2001-000302	R-CARBON:10ohm,5%,1/8W,AA,TP,1.8x3.2mm		
RR34	2008-000138	R-FUSIBLE:1ohm,5%,2W,AA,TP,6.5x17mm			FR21	2001-000319	R-CARBON:120Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RC18	2201-000546	C-CERAMIC,DISC;4.7nF,20%,400V,Y5U,BK,16x			FR20	2001-000319	R-CARBON:120Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RC19	2201-000546	C-CERAMIC,DISC;4.7nF,20%,400V,Y5U,BK,16x			TR9	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RC5	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm			TR12	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RC4	2401-001928	C-AL:2200uF,20%,35V,GP,BK,16x31mm,7			FR8	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RC3	2401-001928	C-AL:2200uF,20%,35V,GP,BK,16x31mm,7			FR1	2001-000331	R-CARBON:12Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RC2	2401-002592	C-AL:2200uF,20%,50V,GP,TP,18x35.5,7			CR5	2001-000411	R-CARBON:18Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RC1	2401-002592	C-AL:2200uF,20%,50V,GP,TP,18x35.5,7			CR2	2001-000411	R-CARBON:18Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
OLPF	2901-001139	FILTER-EMI ON BOARD,50V,5A,-,390PF,7X2,			RR4	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RF1	3601-000170	FUSE-CARTRIDGE,250V,1.6A,TIME-LAG,GLASS,			FR22	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FCW4	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH			DR104	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FCW2	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH			DR103	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FCW1	3708-000181	CONNECTOR-FPC/FFC/PIC,16P,1.25mm,STRAIGH			DR10	2001-000435	R-CARBON:1Mohm,5%,1/8W,AA,TP,1.8x3.2mm		
TCW1	3708-001051	CONNECTOR-FPC/FFC/PIC,13P,1.25mm,ANGLE,S			FR17	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RCW2	3711-000190	CONNECTOR-HEADER,1WALL,2P,1R,7.92mm,STRA			FR16	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DCW2	3711-000907	CONNECTOR-HEADER,BOX,3P,1R,2mm,STRAIGHT,			DR6	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
ACW1	3711-001011	CONNECTOR-HEADER,BOX,5P,1R,2.5mm,STRAIGH			DR13	2001-000449	R-CARBON:2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m		
CW1	3711-001137	CONNECTOR-HEADER,BOX,8P,1R,2mm,STRAIGHT,			DR5	2001-000522	R-CARBON:22Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RCW1	3711-001485	CONNECTOR-HEADER,NOWALL,3P,1R,8MM,STRAIG			TR8	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DCW3	3711-003107	CONNECTOR-HEADER,BOX,3P,1R,2.5mm,STRAIGH			RR12	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
DCW1	3711-003111	CONNECTOR-HEADER,BOX,6P,1R,2.5mm,STRAIGH			DR7	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
RCW5	3711-003112	CONNECTOR-HEADER,BOX,8P,1R,2.5mm,STRAIGH			DR14	2001-000563	R-CARBON:27Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AJCK	3722-000377	JACK-PIN;4P/2C,3.5mm,SN,BLK #16-22			FR4	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	3811-000131	WIRE-PVC CUJ,BCWA,300V,80MM,7/0.16MM,#			FR5	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	6003-000276	SCREW-TAPTITE,BH,+B,M3,L10,ZPC(YEL),SWC			FR7	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	6003-000276	SCREW-TAPTITE,BH,+B,M3,L10,ZPC(YEL),SWC			FR2	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
OIC1	AH14-10004R	IC:M74HC04,SOP,TAPE 14P			DR20	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DL2	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,			CR1	2001-000591	R-CARBON:3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DL1	AH26-10002W	TRANS TRAP-COIL,BIAS-TRAP105K,BIAS-TRAP,			RR6	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DL4	AH26-10003C	TRANS TRAP-COIL,PCHNS-5371EQJ,BIAS-TRAP,			DR28	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RL2	AH27-10001F	COIL-CHOKE;27uH,K,Q30,-,-,DR(6.5*7.5),-			DR21	2001-000613	R-CARBON:3.9Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RL1	AH27-10001F	COIL-CHOKE;27uH,K,Q30,-,-,DR(6.5*7.5),-			FR12	2001-000645	R-CARBON:330Kohm,5%,1/8W,AA,TP,1.8x3.2m		
OCW1	AH39-00096B	LEAD CONNECTOR ASSY;RXD-DV9,#100T,28,AWG			FR13	2001-000645	R-CARBON:330Kohm,5%,1/8W,AA,TP,1.8x3.2m		
KCWA	AH39-20008N	LEAD CONNECTOR ASSY;S264,5395,2P,200MM,1			RR1A	2001-000660	R-CARBON:33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
	AH39-50001K	WIRE HARNESS;RING,1.00T#24,140MM,BLK			RR5	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	AH61-40014A	SUPPORT-RIVET;,,,,,,			DR16	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	AH62-00044A	HEAT SINK;-IC;MAX-L85,AL,3.0T,-,-,-,-,-			DR15	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
	AH63-00278A	COVER-PCB;MAX-WL85,PVC 0.5T,-,-,-,-,-,CLR,			DR102	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,			TR10	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,			RR14	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,			DR29	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,			DR25	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP			DR22	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP			TR11	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP			TR7	2001-000734	R-CARBON:4.7Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP			FR23	2001-000773	R-CARBON:470Kohm,5%,1/8W,AA,TP,1.8x3.2m		
					FR14	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		

Location no	Code no.	Description	Specification	Remarks
DR19	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR6	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
CR3	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR15	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR3	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR6	2001-000786	R-CARBON:47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
FR9	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
FR10	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR110	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR101	2001-000802	R-CARBON:5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR12	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR27	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
RR7	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR37	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR36	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR35	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR34	2001-000890	R-CARBON:6.8Kohm,5%,1/8W,AA,TP,1.8x3.2m		
DR33	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR32	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR31	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR30	2001-000924	R-CARBON:680ohm,5%,1/8W,AA,TP,1.8x3.2mm		
DR26	2001-000977	R-CARBON:8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m		
DR8	2001-000977	R-CARBON:8.2KOHM,5%,1/8W,AA,TP,1.8x3.2m		
RR13	2001-001004	R-CARBON:82ohm,5%,1/4W,AA,TP,2.4x6.4mm		
DR23	2001-001096	R-CARBON(S):2.2ohm,5%,1/2W,AA,TP,2.4x6.4m		
RR2	2001-001153	R-CARBON(S):47ohm,5%,1/2W,AA,TP,2.4x6.4m		
RR1	2001-001153	R-CARBON(S):47ohm,5%,1/2W,AA,TP,2.4x6.4m		
DSR2	2103-000248	VR-SEMI:200Kohm,30%,1/10W,TOP		
DSR1	2103-000248	VR-SEMI:200Kohm,30%,1/10W,TOP		
FC6	2201-000146	C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5,		
FC3	2201-000146	C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5,		
RC25	2201-000161	C-CERAMIC,DISC:10nF,+80-20%,500V,Y5V,TP,		
RC26	2201-000161	C-CERAMIC,DISC:10nF,+80-20%,500V,Y5V,TP,		
DC23	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,Y5T,TP,5x3.5		
DC22	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,Y5T,TP,5x3.5		
DC19	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,Y5T,TP,5x3.5		
DC18	2201-000300	C-CERAMIC,DISC:1nF,20%,50V,Y5T,TP,5x3.5		
DC33	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
DC17	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
FC26	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
FC27	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
FC28	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
FC29	2201-000368	C-CERAMIC,DISC:220pF,10%,50V,SL,TP,6.5x3		
OC3	2201-000381	C-CERAMIC,DISC:22nF,+80%,50V,-,8x4mm,-		
OC1	2201-000487	C-CERAMIC,DISC:33pF,5%,50V,SL,TP,5x3.5mm		
DC29	2201-000674	C-CERAMIC,DISC:0.82nF,10%,50V,Y5P,BK,5x3		
DC1	2201-000674	C-CERAMIC,DISC:0.82nF,10%,50V,Y5P,BK,5x3		
CJW91	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP		
CJW80	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP		
CJW23	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP		
TC20	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3		
CJW30	2202-000807	C-CERAMIC,MLC-AXIAL:22nF,+80-20%,25V,Y5V		
CJW27	2202-000807	C-CERAMIC,MLC-AXIAL:22nF,+80-20%,25V,Y5V		
FC14	2301-000361	C-FILM,PEF:1.2nF,10%,50V,TP,-5mm		
DC10	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DC25	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DC26	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DC7	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FC32	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FC17	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FC16	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FC15	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
FC13	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7		
DC11	2301-000379	C-FILM,PEF:10nF,10%,50V,TP,6x12x3.5mm,-		
DC24	2301-000379	C-FILM,PEF:10nF,10%,50V,TP,6x12x3.5mm,-		
DC31	2301-000385	C-FILM,PEF:12nF,10%,50V,TP,7x12x3.5mm,-		
DC37	2301-000385	C-FILM,PEF:12nF,10%,50V,TP,7x12x3.5mm,-		
DC14	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC15	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC16	2301-000404	C-FILM,PEF:2.2nF,10%,50V,TP,5.5x12x3mm,-		
DC13	2301-000407	C-FILM,PEF:2.7nF,10%,50V,TP,5.5x12x3mm,-		
CC2	2301-000449	C-FILM,PEF:47nF,10%,50V,TP,9.5x12.5x5mm,		
FC11	2301-000454	C-FILM,PEF:5.6nF,10%,50V,TP,6x12x3.3.5mm		
FC12	2301-000454	C-FILM,PEF:5.6nF,10%,50V,TP,6x12x3.3.5mm		
OC2	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11.5		
RC6	2401-000357	C-AL:100uF,20%,50V,GP,-,8x11.5,3.5mm		
DC30	2401-000419	C-AL:10uF,20%,16V,GP,-,4x7.5		
CC5	2401-000419	C-AL:10uF,20%,16V,GP,-,4x7.5		
RC9	2401-000438	C-AL:10uF,20%,25V,GP,-,5x11.2mm		
DC2	2401-000778	C-AL:220uF,20%,10V,GP,-,6.3x11.2.5m		
RC11	2401-000795	C-AL:220uF,20%,16V,GP,TP,8x12mm,5mm		
RC10	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
FC10	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
CC1	2401-000907	C-AL:22uF,20%,16V,GP,TP,5x11mm,5mm		
FC34	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
FC1	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DC36	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DC35	2401-001022	C-AL:3.3uF,20%,50V,GP,TP,5X11.5		
DC5	2401-001080	C-AL:330nF,20%,50V,GP,-,5x11.2mm		
DC4	2401-001102	C-AL:330uF,20%,16V,GP,TP,8x11.5mm,5		
FC2	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		
FC25	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		
FC4	2401-001238	C-AL:4.7uF,20%,25V,GP,BK,3x5.1mm		

Location no	Code no.	Description	Specification	Remarks
FC24	2401-001324	C-AL:470nF,20%,50V,GP,BK,3x5.1mm		
CC3	2401-001895	C-AL:100uF,20%,16V,GP,TP,6.3x11.2.5		
CC4	2401-001895	C-AL:100uF,20%,16V,GP,TP,6.3x11.2.5		
DC20	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC22	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC23	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC30	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC31	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC8	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC9	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
RC7	2401-001912	C-AL:1uF,20%,50V,GP,BK,5x11mm,2mm		
FC2	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FC33	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
FC4	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
RC8	2401-001954	C-AL:4.7uF,20%,50V,GP,TP,5x11mm,5mm		
DC12	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DC21	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DC32	2401-001975	C-AL:47uF,20%,16V,GP,TP,5x11mm,5mm		
DC9	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC28	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC27	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC8	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC21	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC20	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC19	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC6	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
DC34	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
FC18	2401-002180	C-AL:2.2uF,20%,50V,GP,TP,5x11mm,5mm		
CL2	2701-000178	INDUCTOR-AXIAL:33uH,10%,3x7mm		
DL3	2701-000298	INDUCTOR-AXIAL:470uH,10%,4.2x9.8mm		
CL1	2701-000298	INDUCTOR-AXIAL:470uH,10%,4.2x9.8mm		
RF1	3602-000147	FUSE-CLIP:250V,7.5A,30mohm		
	AH41-00434A	PCB,MAX-B550/70VB555D,-,-,-,-,3		

AH92-01354A ASSY PCB;MAX-B550,CE,ASSY-AMP PCB,CE


AIC1	1201-001582	IC-POWER AMP:402-070,SIP,15P,-,DUAL,30dB
AR5R	2003-000390	R-METAL OXIDE(S):0.27OHM,5%,2W,AA,TP,
AR5L	2003-000390	R-METAL OXIDE(S):0.27OHM,5%,2W,AA,TP,
AR4L	2003-000390	R-METAL OXIDE(S):0.27OHM,5%,2W,AA,TP,
AR4R	2003-000390	R-METAL OXIDE(S):0.27OHM,5%,2W,AA,TP,
AR402	2003-000734	R-METAL OXIDE(S):560ohm,5%,2W,AA,TP,4x12
AR401	2003-000734	R-METAL OXIDE(S):560ohm,5%,2W,AA,TP,4x12
AC2L	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm
AC2R	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm
AC301	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm
AC302	2401-000230	C-AL:100uF,20%,100V,GP,TP,12.5x20mm
AC20	2401-000871	C-AL:220uF,20%,50V,GP,-,10x16mm,5mm
ARL1	3501-001197	RELAY-MINIATURE:12VDC,0.54W,44.4mA,1Form
ACW1	3708-000181	CONNECTOR-FPC/FPC/PC:16P,1.25mm,STRAIGH
KCWB	3711-000820	CONNECTOR-HEADER:BOX,2P,1R,2.5mm,STRAIGH
SPK1	3716-001132	TERMINAL-BLOCK:SOLDER,4P,-,-,-
	6003-000278	SCREW-TAPTITE:BH,+B,M3,L18,ZPC(YEL),SWC
	6003-000283	SCREW-TAPTITE:BH,+B,M3,L18,ZPC(YEL),SM20
AL1L	AH27-90001A	COIL-SPRING:-,2.2UH,-,-,-,SPRING,-,-,-,-
AL1R	AH27-90001A	COIL-SPRING:-,2.2UH,-,-,-,SPRING,-,-,-,-
AL2	AH27-90001A	COIL-SPRING:-,2.2UH,-,-,-,SPRING,-,-,-,-
AL3	AH27-90001A	COIL-SPRING:-,2.2UH,-,-,-,SPRING,-,-,-,-
ACW2	AH39-00249A	LEAD CONNECTOR ASSY:MX-K5,#1007,22AWG,U/L
JMP2	AH39-50001L	WIRE HARNESS:RING,1007#24,200MM,BLK
	AH61-00973A	BRACKET-H/SINK,L,MAX-WB650,SECC T1.0,-,-
	AH61-00977A	BRACKET-H/SINK,R,NAX-WB650,SECC T1.0,-,-
	AH62-00063B	HEAT SINK,-,M,MAX-B550,AL EXTR,-,-,-,-,-
AD5	0402-000127	DIODE-RECTIFIER:1N4002,100V,1A,DO-41,TP
AQ6	0501-000010	TR-SMALL SIGNAL:KSC1008,NPN,800mW,TO-92,
AQ10	0501-000303	TR-SMALL SIGNAL:KSA733,PNP,250mW,TO-92,T
AQ7R	0501-000331	TR-SMALL SIGNAL:KSC1009-Y,NPN,800mW,TO-9
AQ7L	0501-000331	TR-SMALL SIGNAL:KSC1009-Y,NPN,800mW,TO-9
AQ7	0501-000407	TR-SMALL SIGNAL:KSD471A-Y,NPN,800mW,TO-9
AQ5	0501-000407	TR-SMALL SIGNAL:KSD471A-Y,NPN,800mW,TO-9
AQ2R	0501-000407	TR-SMALL SIGNAL:KSD471A-Y,NPN,800mW,TO-9
AQ2L	0501-000407	TR-SMALL SIGNAL:KSD471A-Y,NPN,800mW,TO-9
AQ8	0501-000610	TR-SMALL SIGNAL:KSA928A-Y,PNP,1W,TO-92L,
AQ1A	0504-000118	TR-DIGITAL:KSR1003,NPN,300MW,22K/22K,TO
AQ1	0504-001003	TR-DIGITAL:KSR2003,PNP,300MW,22K/22K,TO
AR6L	2001-000017	R-CARBON:4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm
AR6R	2001-000017	R-CARBON:4.7ohm,5%,1/4W,AA,TP,2.4x6.4mm
AR77	2001-000065	R-CARBON:10Kohm,5%,1/4W,AA,TP,2.4x6.4mm
AJR9	2001-000073	R-CARBON:33KOHM,5%,1/4W,AA,TP,2.4x6.4MM
AR2R	2001-000221	R-CARBON:1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
AR2L	2001-000221	R-CARBON:1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
AR16R	2001-000221	R-CARBON:1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
AR16L	2001-000221	R-CARBON:1.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
AR26	2001-000273	R-CARBON:100Kohm,5%,1/8W,AA,TP,1.8x3.2m
AR1R	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR1L	2001-000290	R-CARBON:10Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR9	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR36	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR405L	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR21	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR35	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.8x3.2mm
AR405R	2001-000429	R-CARBON:1Kohm,5%,1/8W,AA,TP,1.


Location no	Code no.	Description	Specifiation	Remarks
AR31	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR25	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR8R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR8L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR33	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76L	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR32	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR20	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR76R	2001-000591	R-CARBON;3.3Kohm,5%,1/8W,AA,TP,1.8x3.2m		
AR23	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR29	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR310	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR309	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3R	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR56L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR3L	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR30	2001-000864	R-CARBON;56Kohm,5%,1/8W,AA,TP,1.8x3.2mm		
AR404	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR403	2001-001070	R-CARBON(S);120ohm,5%,1/2W,AA,TP,2.4x6.4		
AR78	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR13	2003-000008	R-METAL OXIDE(S);100ohm,5%,1W,AA,TP,3.3x		
AR15R	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AR15L	2003-000689	R-METAL OXIDE(S);4.7ohm,5%,1W,AA,TP,3.3x		
AC1L	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
AC1R	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
ACSC1	2201-000368	C-CERAMIC,DISC;220pF,10%,50V,SL,TP,6.5x3		
ACE2	2201-000381	C-CERAMIC,DISC;22nF,+80%,50V,-,8x4mm,-		
AC17R	2201-000532	C-CERAMIC,DISC;4.7nF,10%,50V,Y5P,TP,8x3.		
AC17L	2201-000532	C-CERAMIC,DISC;4.7nF,10%,50V,Y5P,TP,8x3.		
AC16R	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,		
AC16L	2201-000783	C-CERAMIC,DISC;100nF,+80-20%,50V,Y5V,TP,		
AC5R	2201-000838	C-CERAMIC,DISC;3pF,0.3pF,50V,CH,TP,5x3.5		
AC5L	2201-000838	C-CERAMIC,DISC;3pF,0.3pF,50V,CH,TP,5x3.5		
AC15L	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
AC15R	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7		
AC18R	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC18L	2301-000404	C-FILM,PEF;2.2nF,10%,50V,TP,5.5x12x3mm,-		
AC2L	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC2R	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC301	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC302	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20mm		
AC3R	2401-000385	C-AL;10uF,20%,100V,GP,TP,6.3x11.5		
AC6L	2401-000385	C-AL;10uF,20%,100V,GP,TP,6.3x11.5		
AC4R	2401-001154	C-AL;33uF,20%,10V,GP,-,5x11,2mm		
AC4L	2401-001154	C-AL;33uF,20%,10V,GP,-,5x11,2mm		
AC21	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
AC22	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
AC23	2401-001912	C-AL;1uF,20%,50V,GP,BK,5x11mm,2mm		
AH41-004338		PCB;MAX-B550/570VB555,-,-,-,-,247		

Location no	Code no.	Description	Specifiation	Remarks
-------------	----------	-------------	--------------	---------

4. Block Diagram


4-1 MAIN

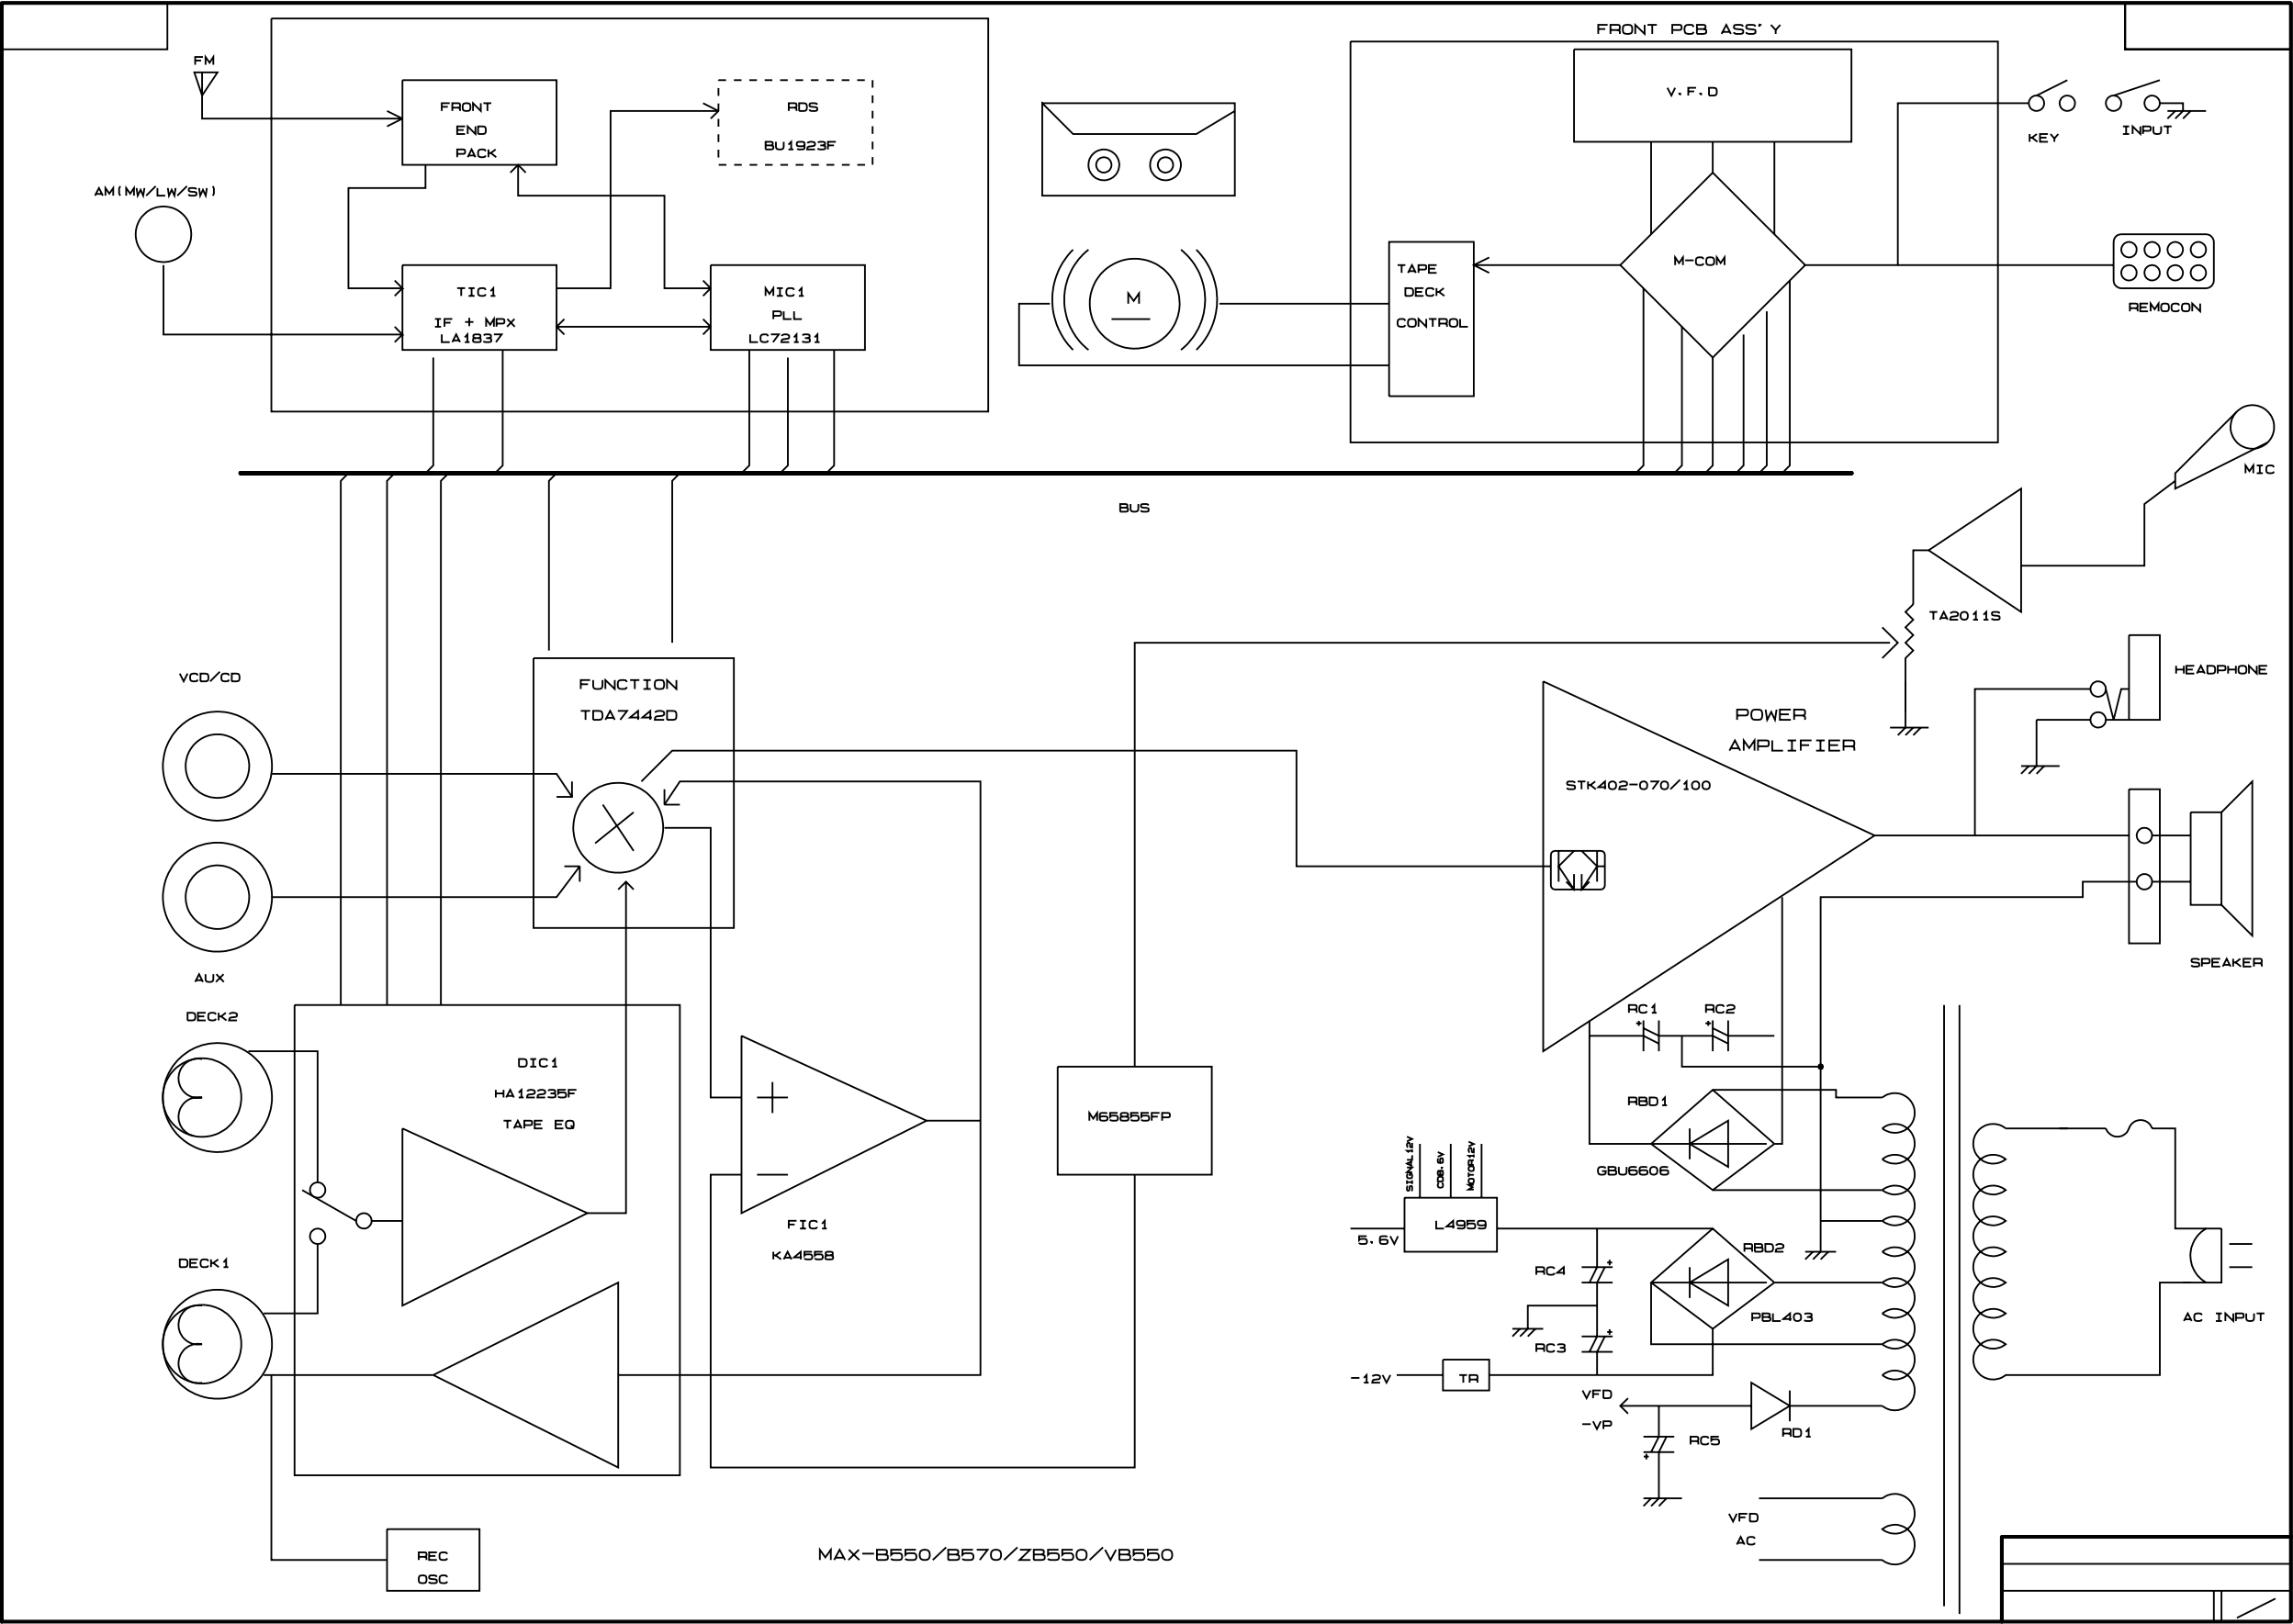

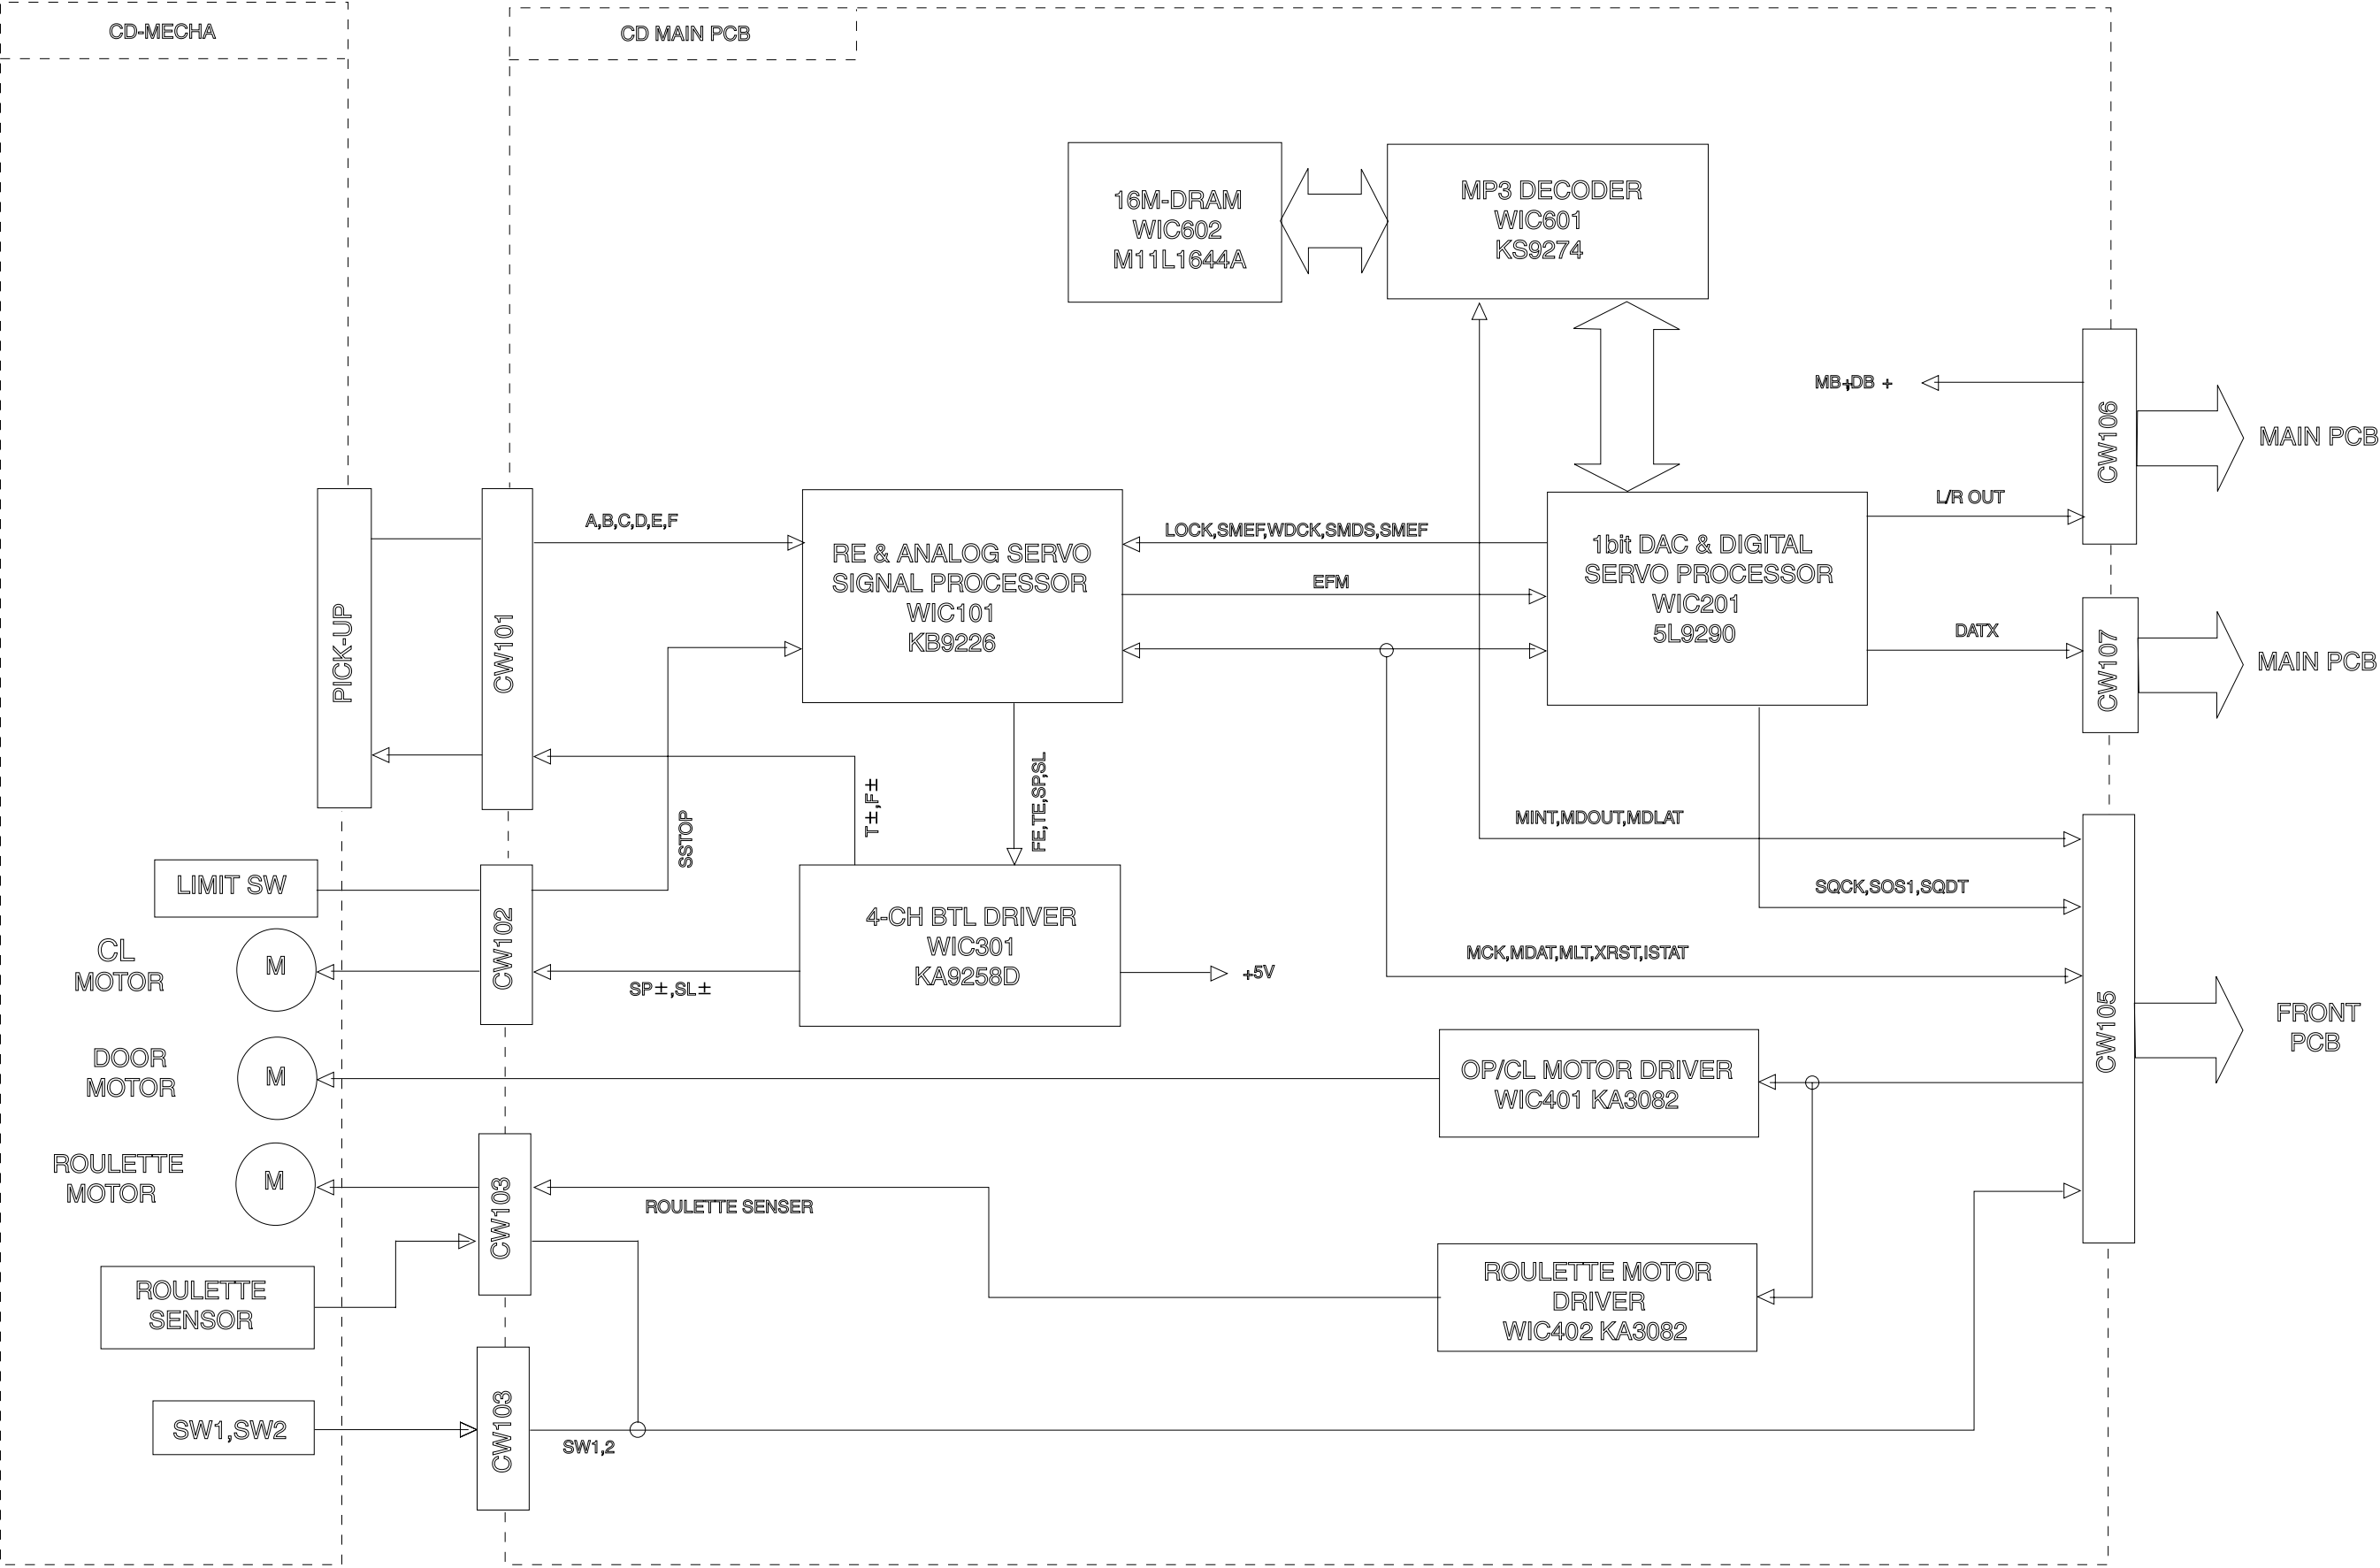


6. Wiring Diagram(COMMON)

MODEL : MAX-B550/B570 WIRE SCHEMATIC

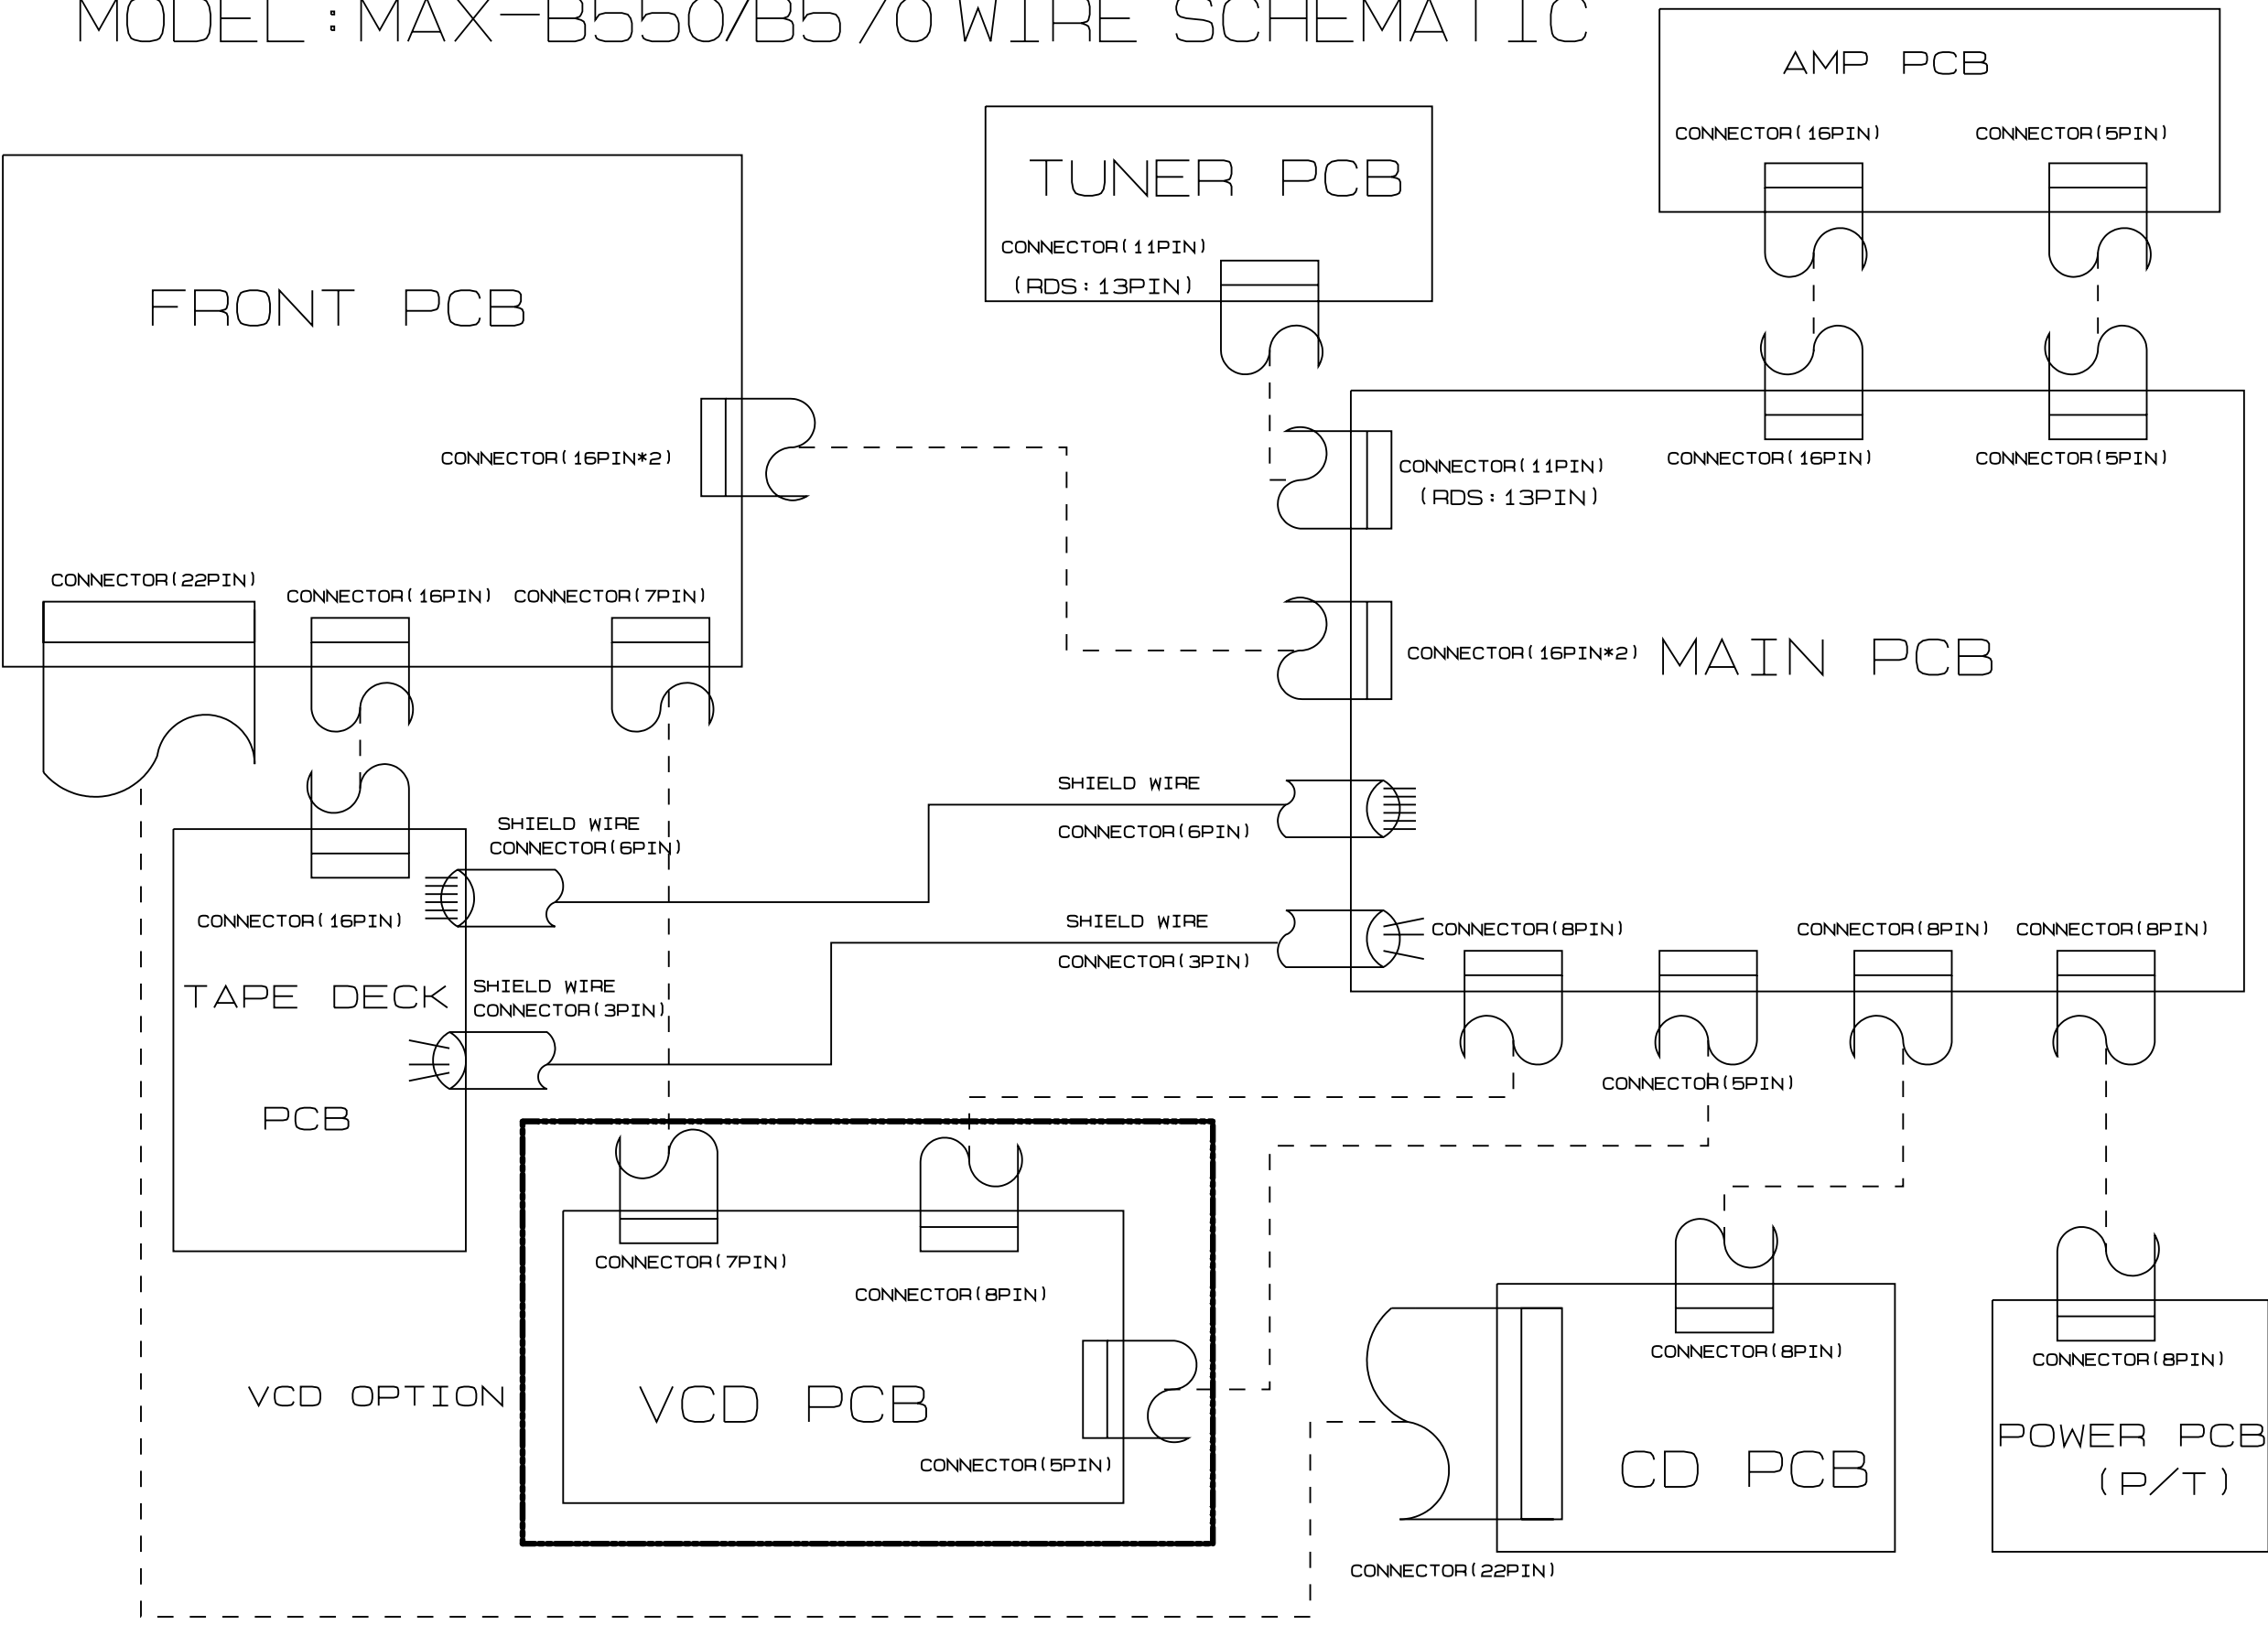



7. Schematic Diagram


7-1 CD/MP3 Parts

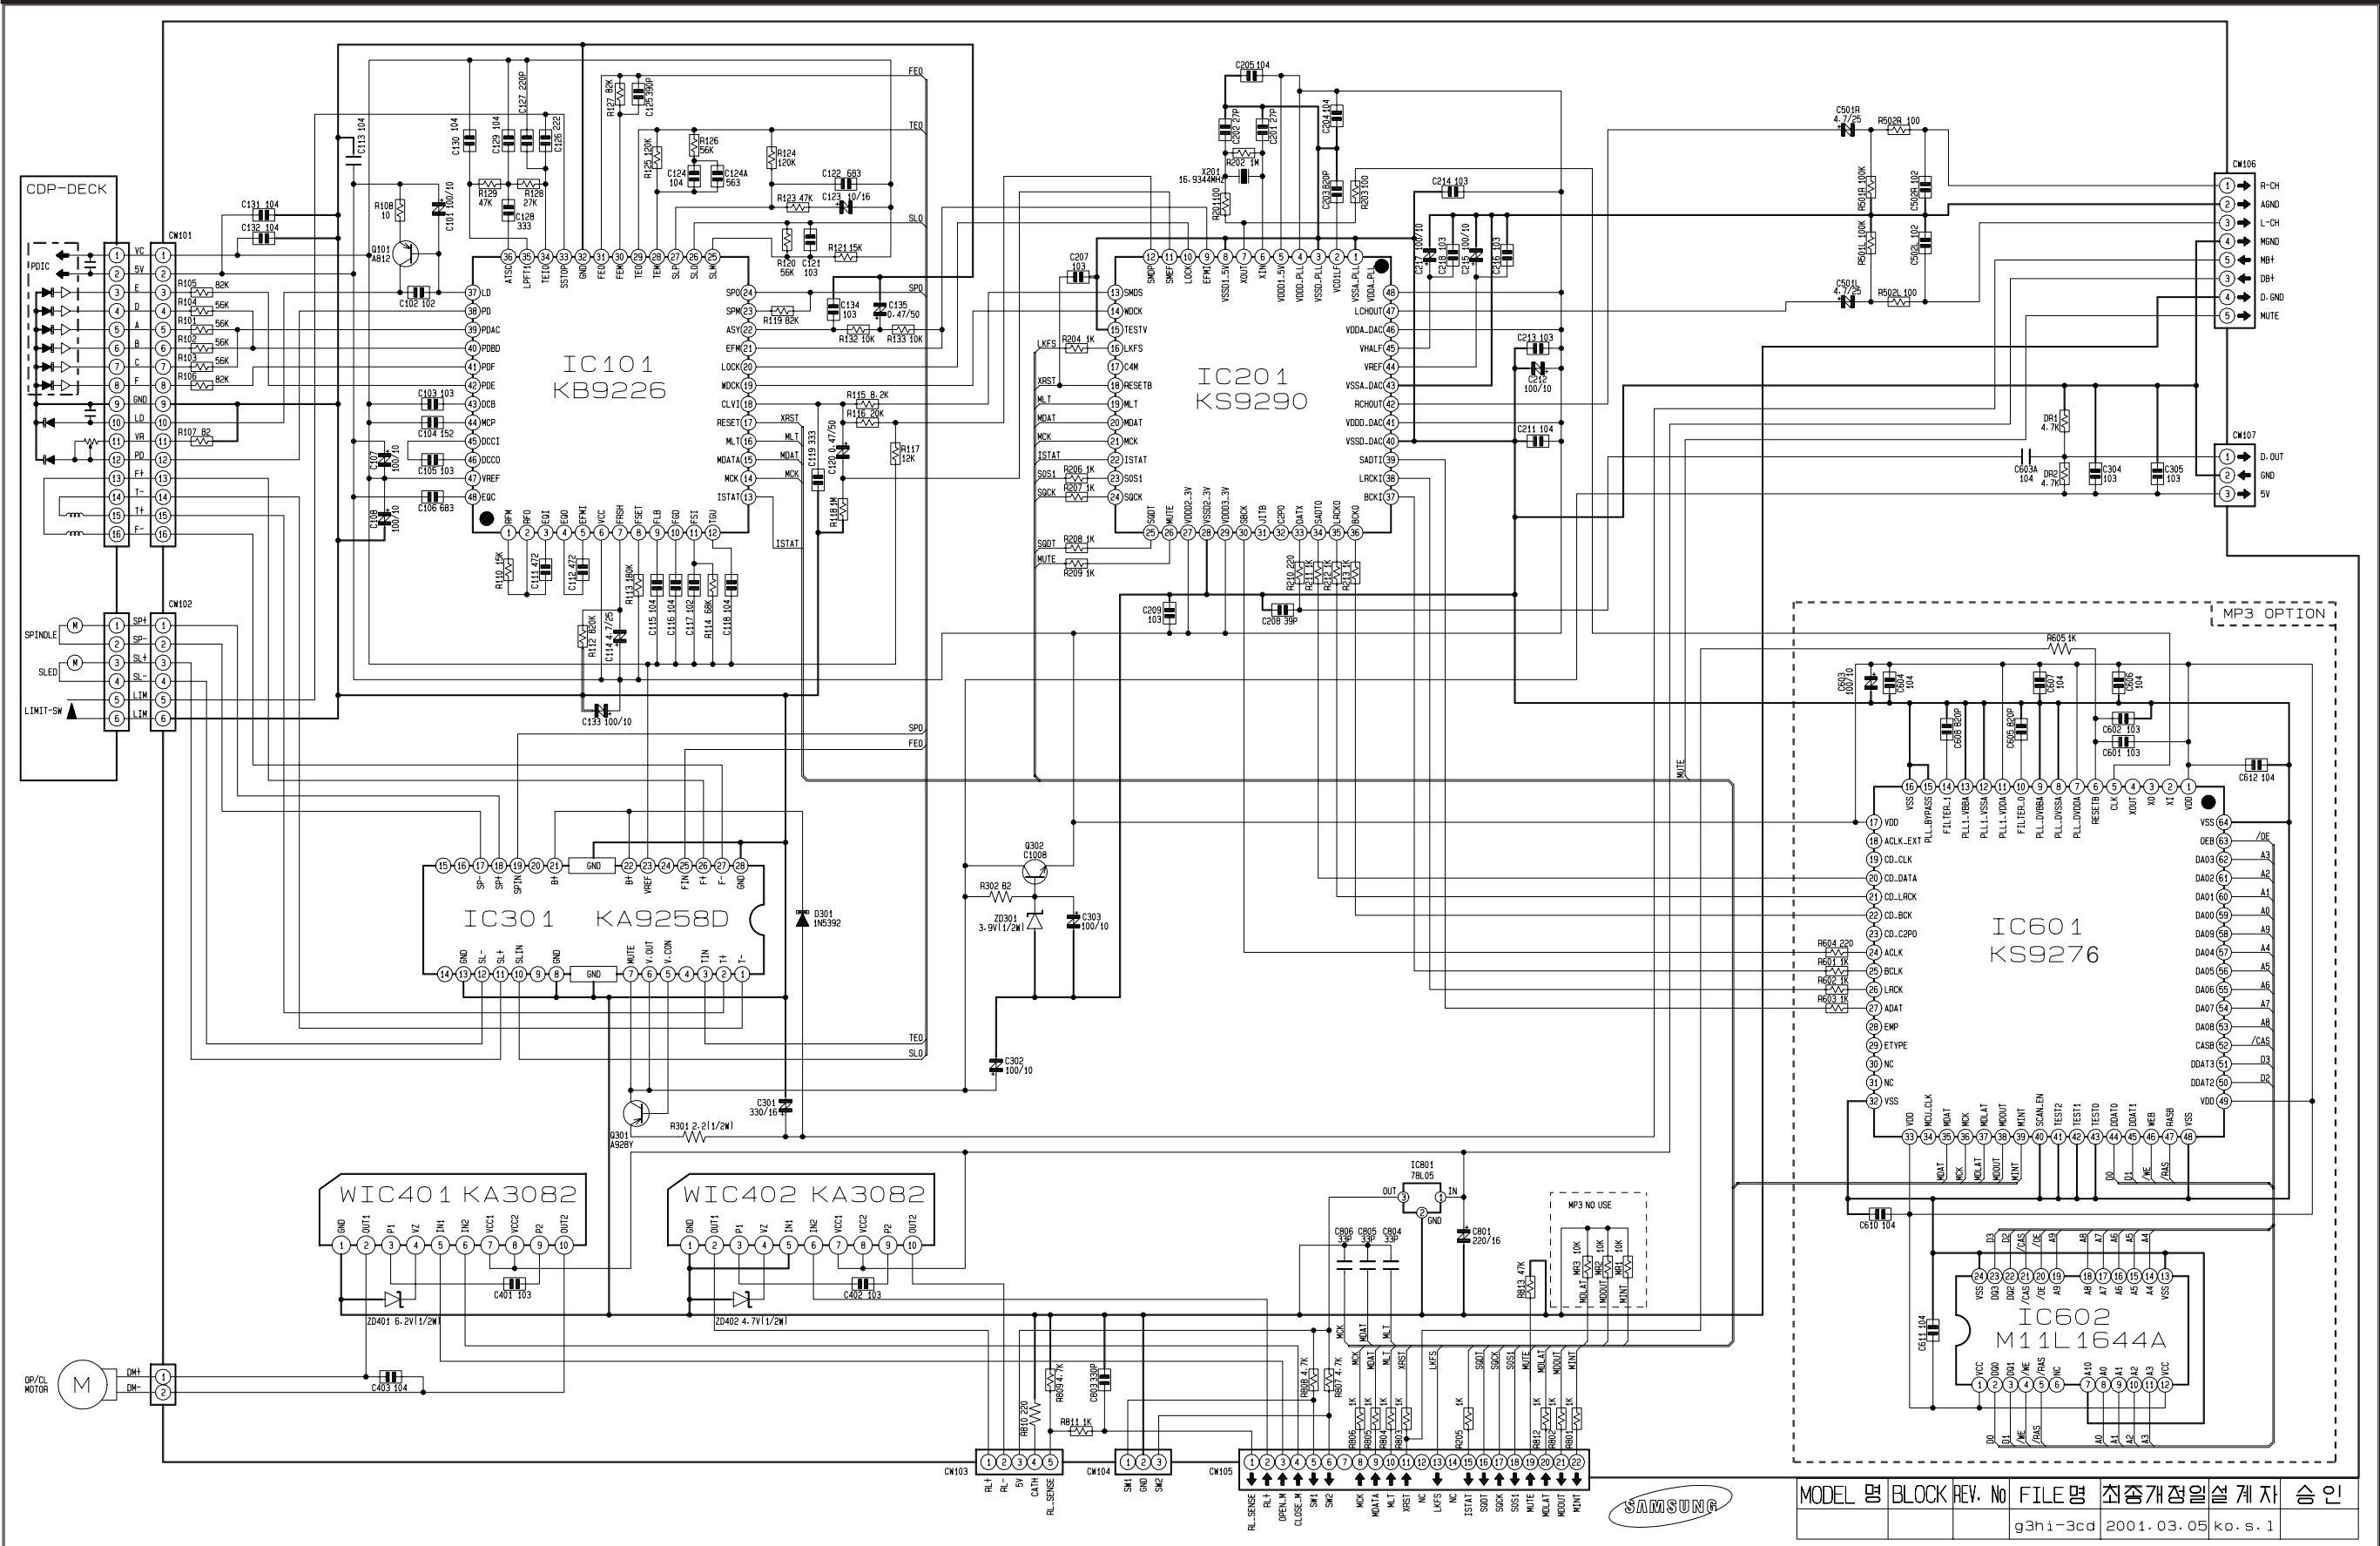


7-2 MAIN Part

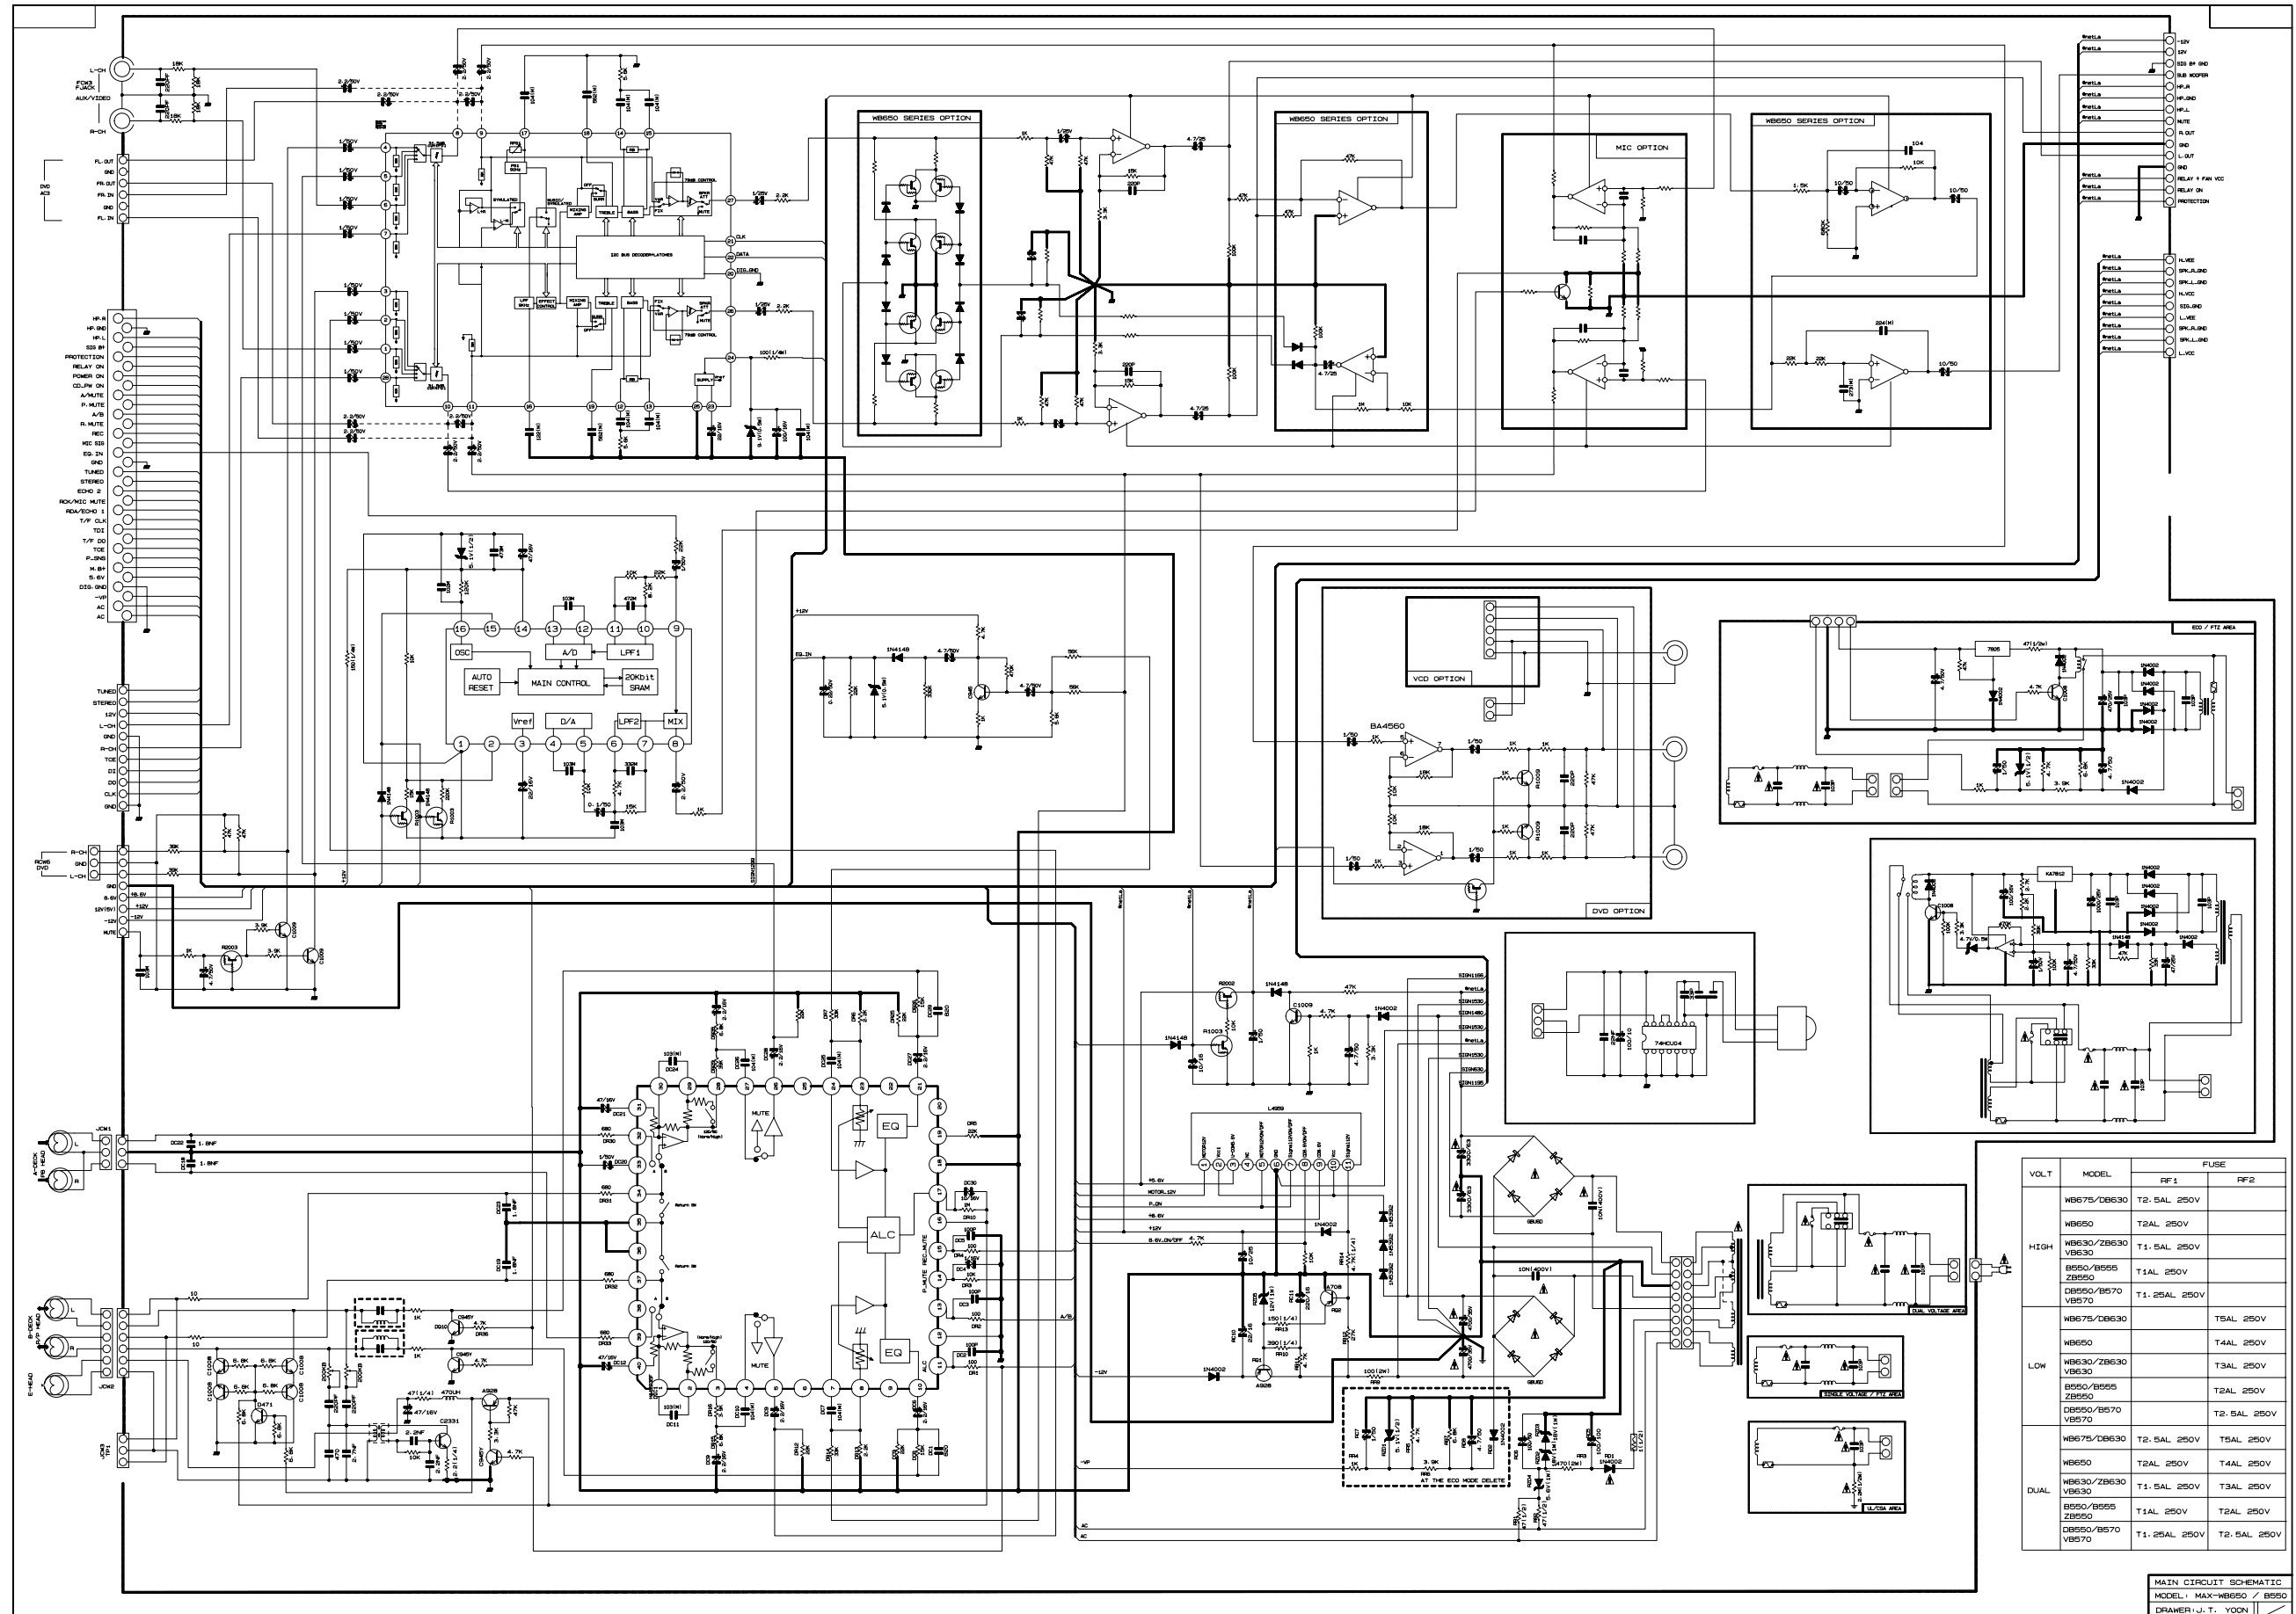

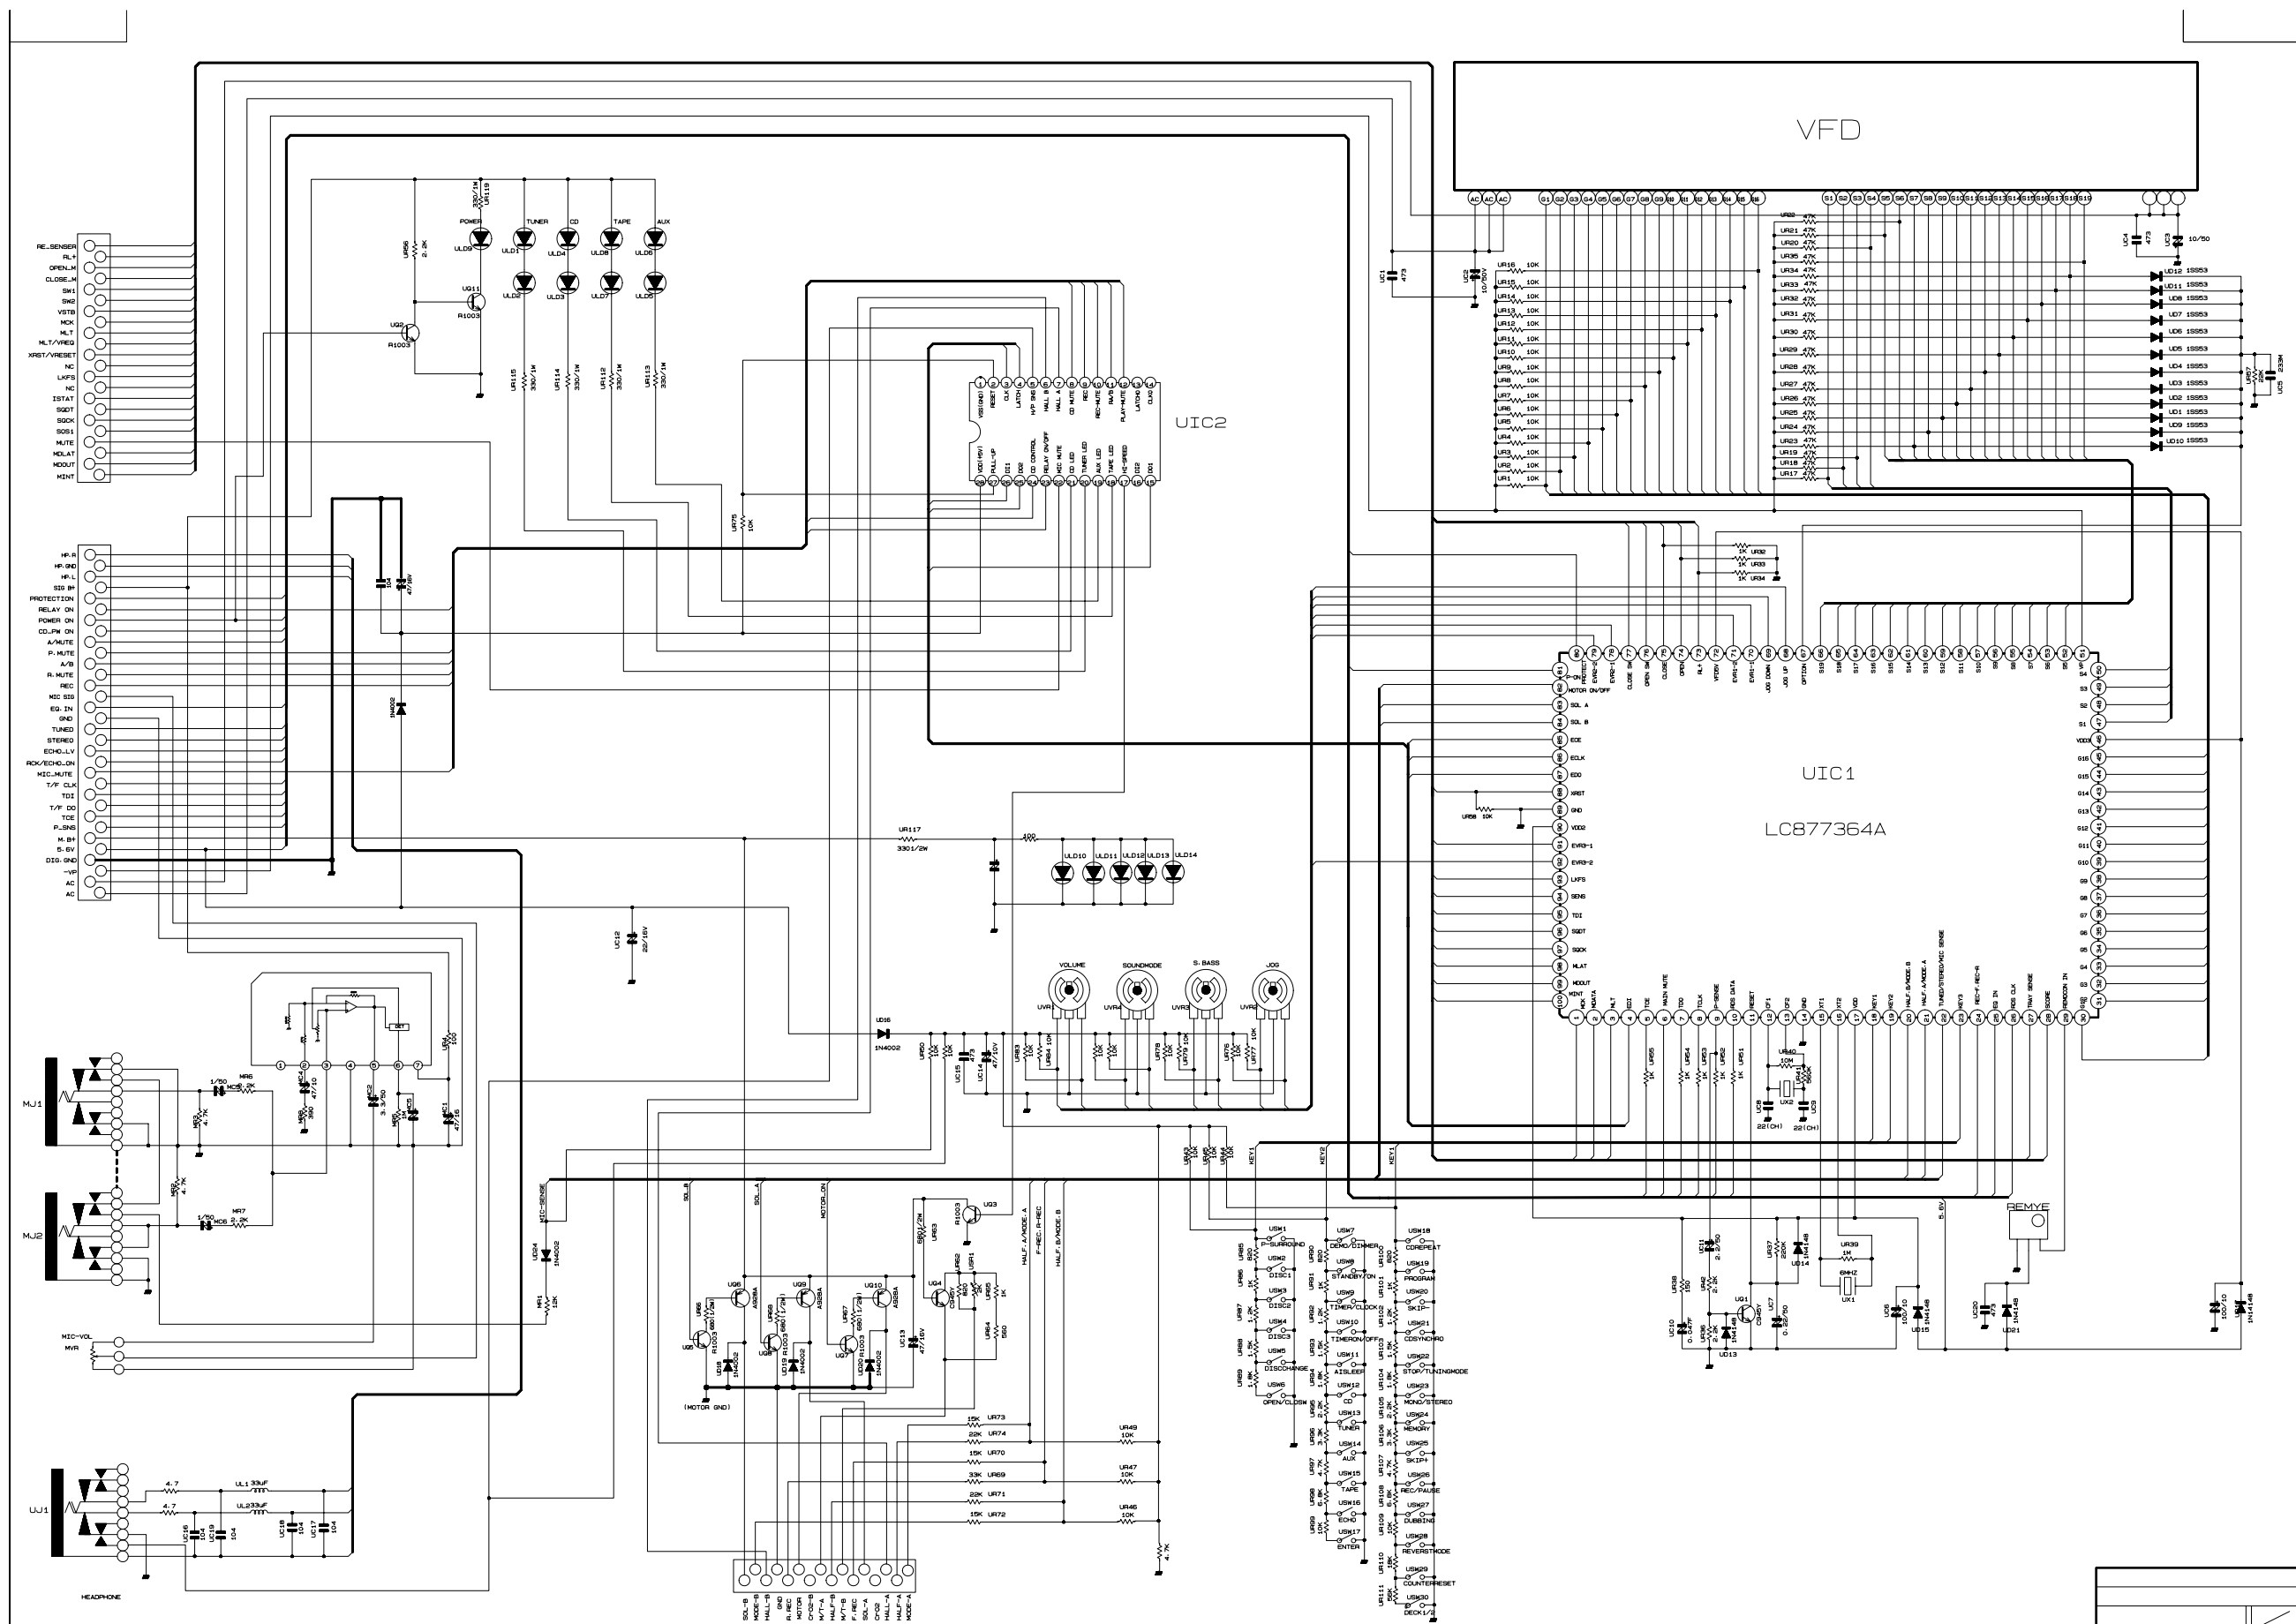

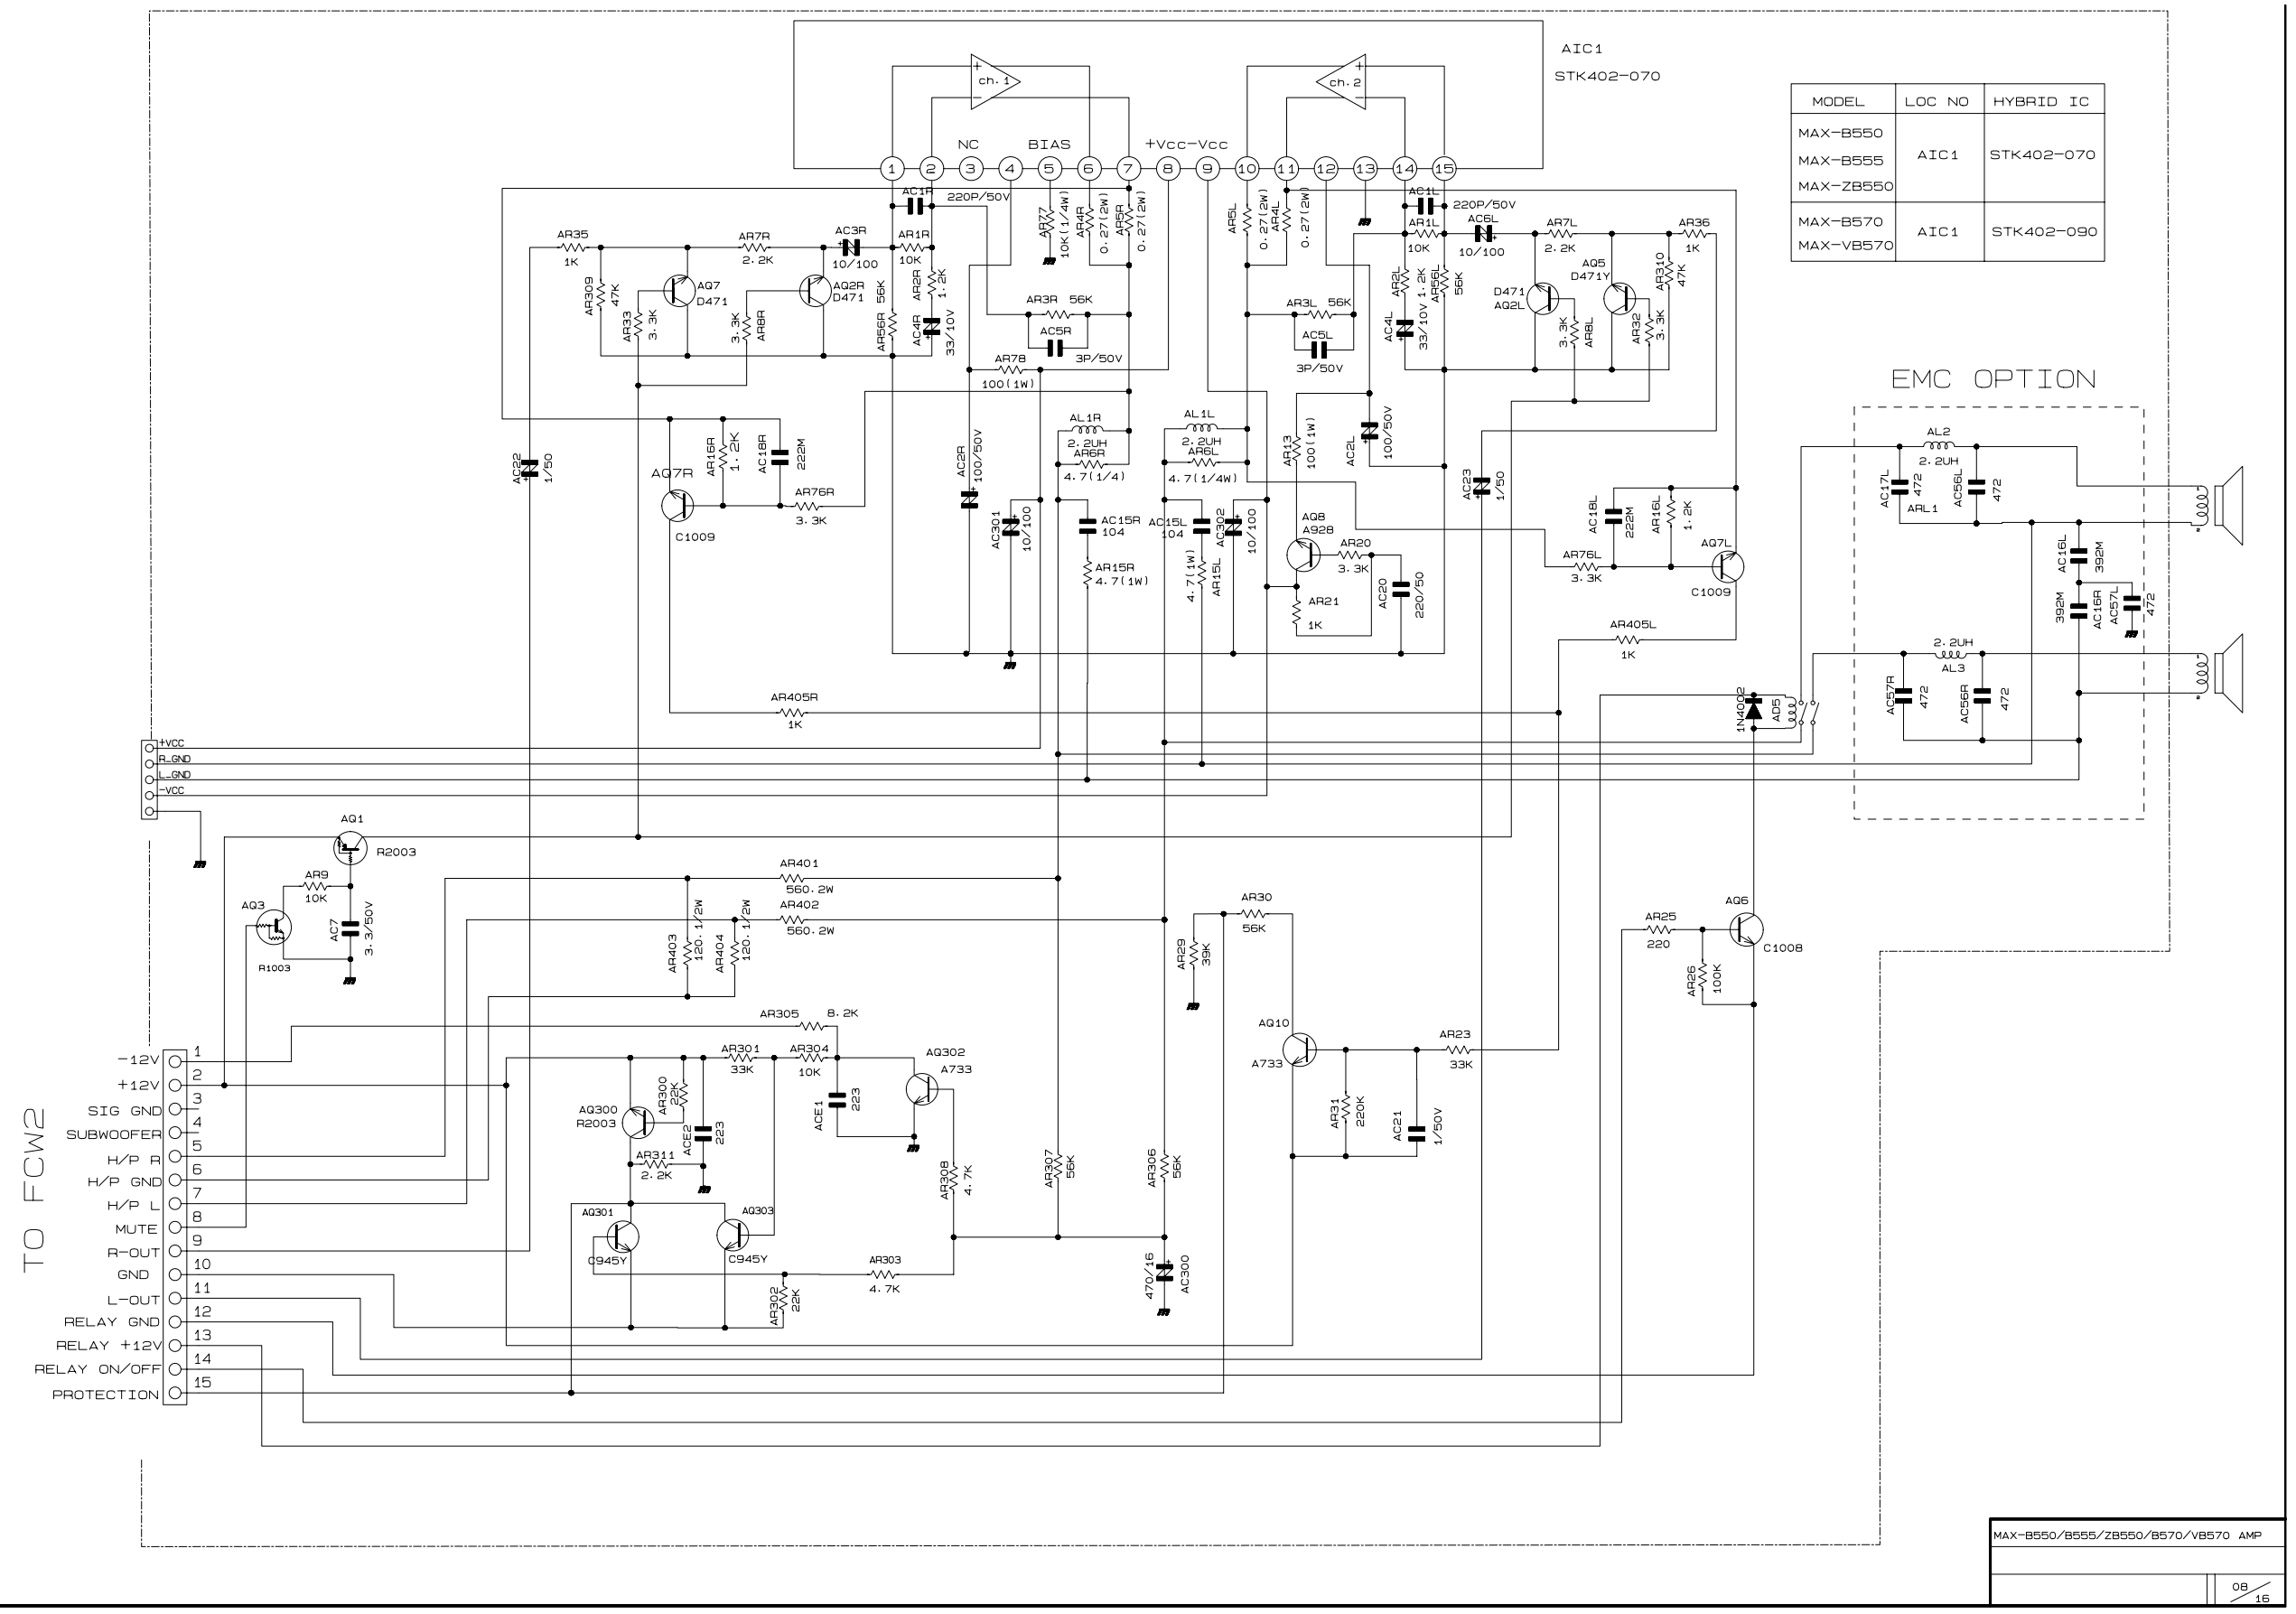

7-6 TUNER(RUSIA)

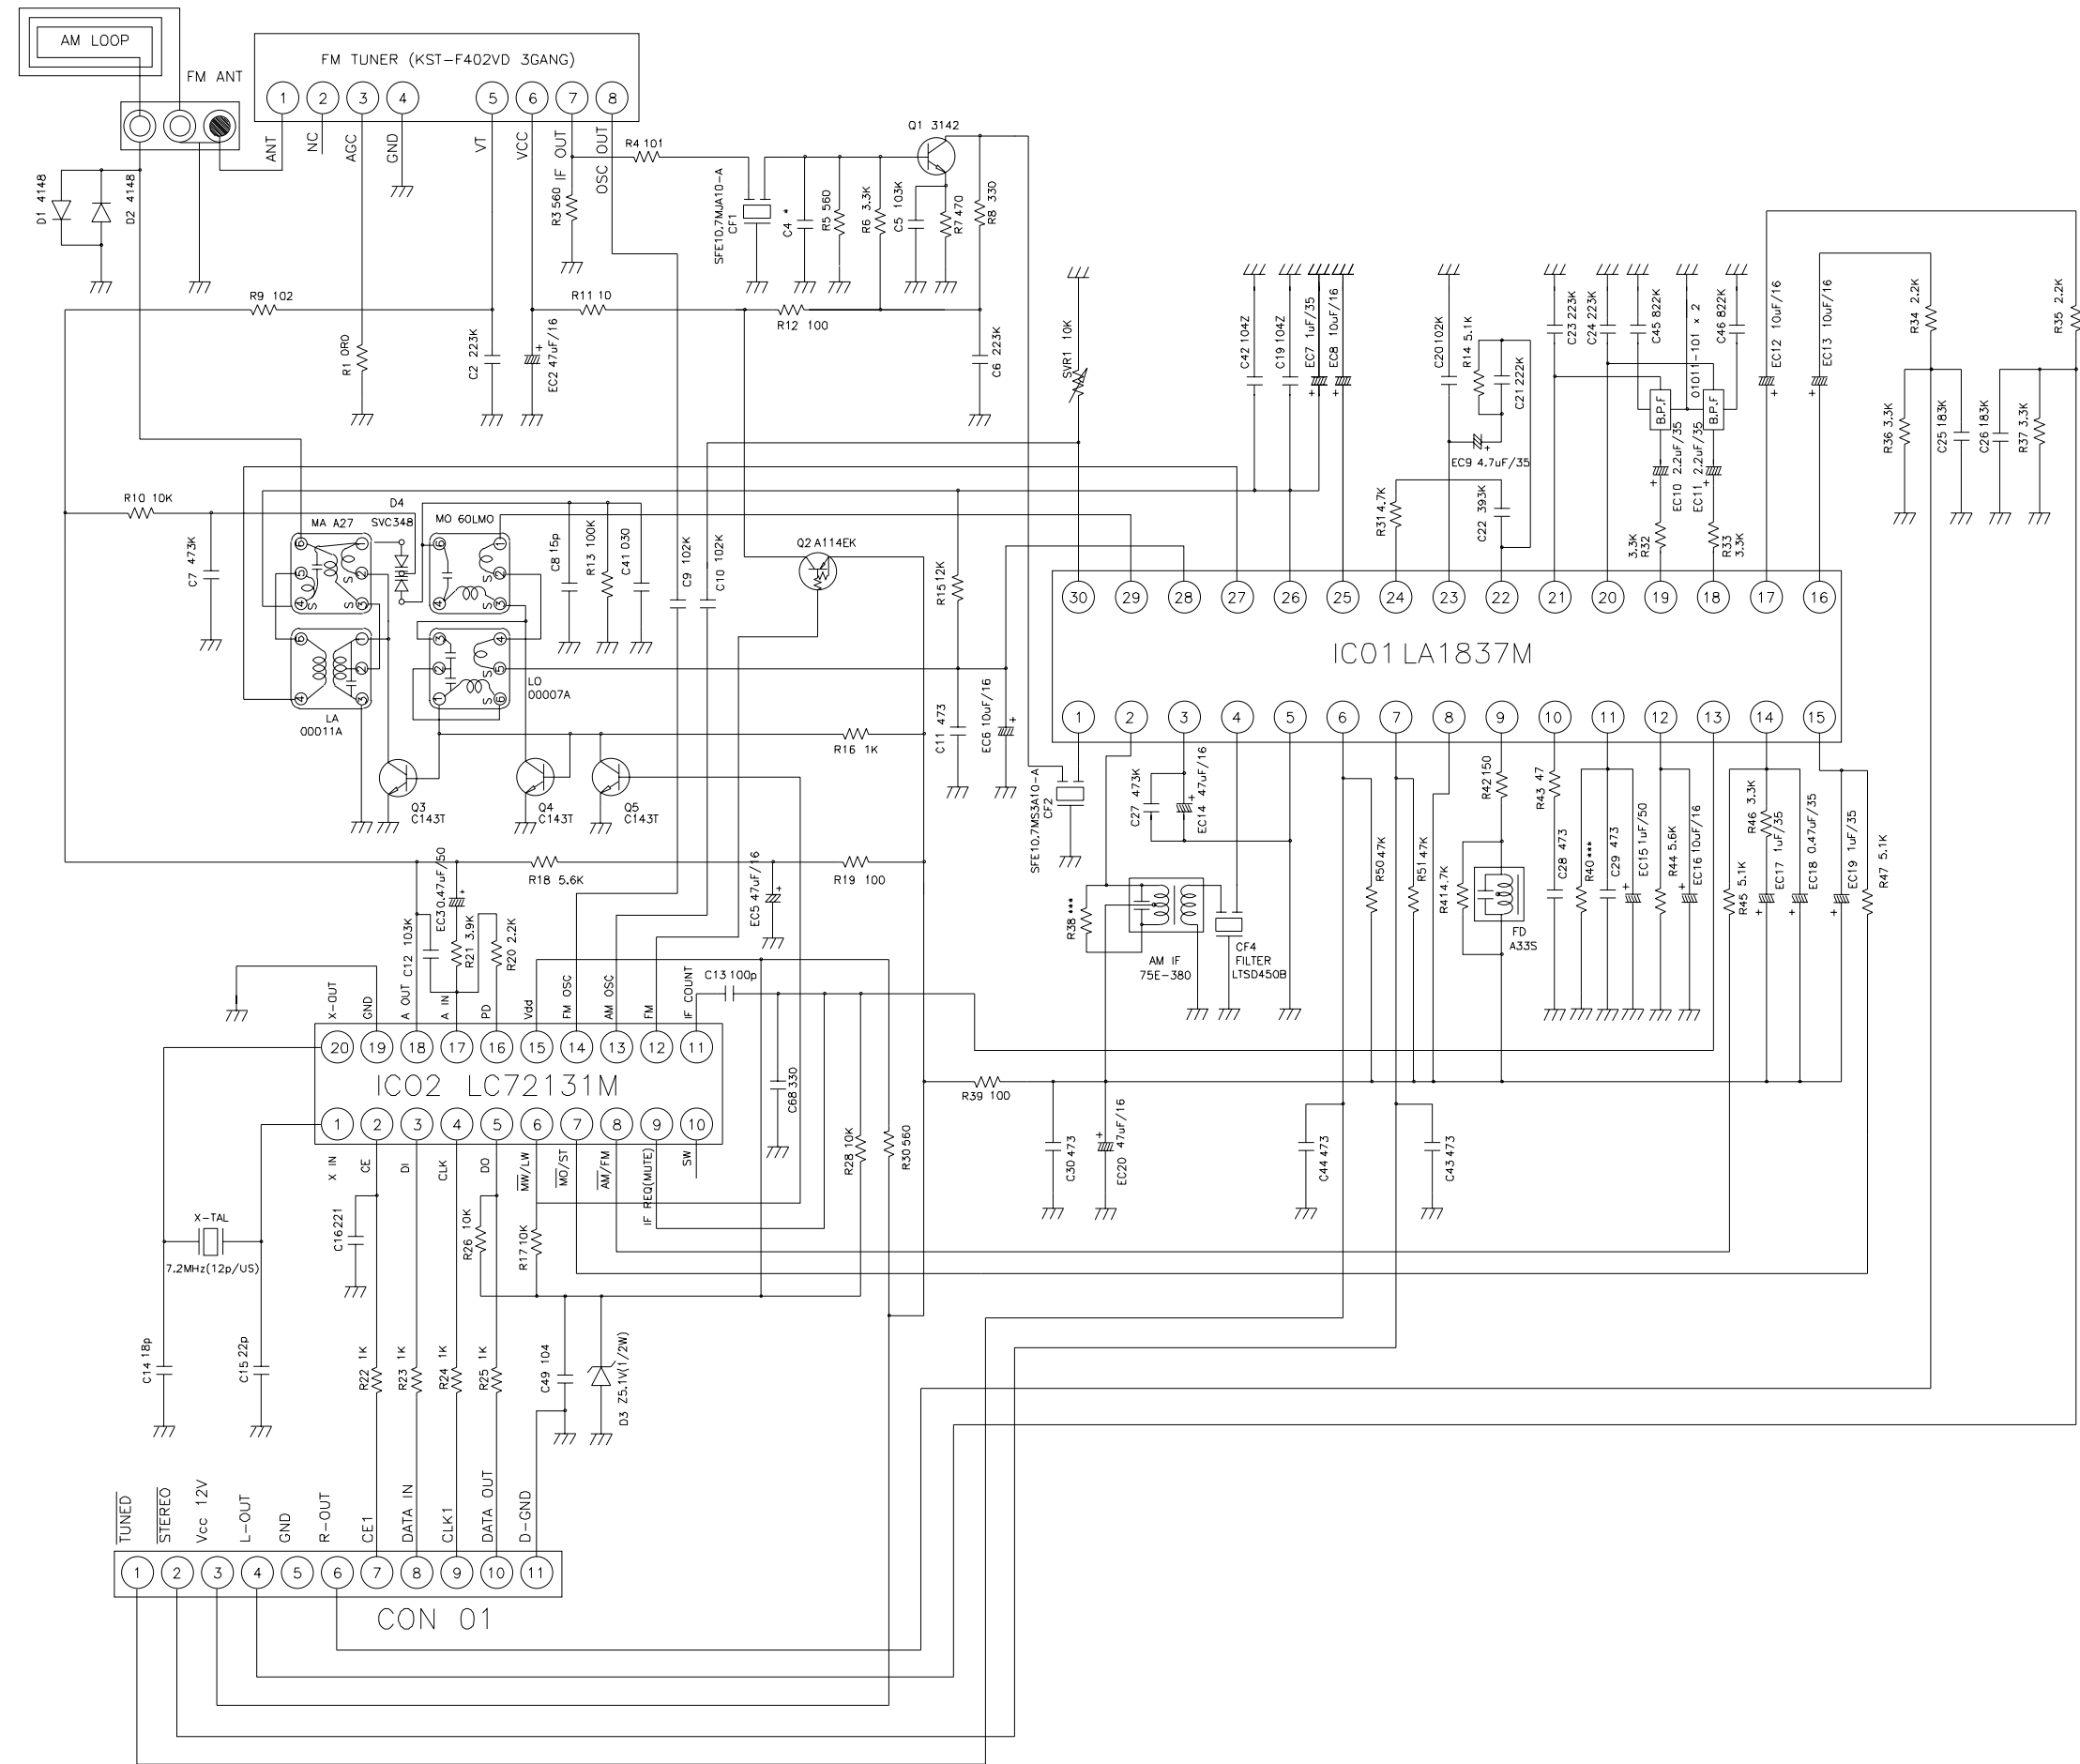

7-7 TUNER(2BAND)

